

LINEAR ACTUATORS

Pre-assembled, all-in-one linear actuators save design and installation time. Choose from NSK's two product lines: Monocarrier™ and Toughcarrier™.




Linear Actuators

1 Monocarrier™	
1.1 Features.....	4
1.2 Classifications and Series	6
1.3 Optional Components	8
1.4 Selection of Monocarrier™	9
2 MCM Series	
2.1 MCM Series Reference Number Coding	24
2.2 MCM Series Dimension Table of Standard Products	25
2.3 MCM Series Optional Accessories	41
3 MCH Series	
3.1 MCH Series Reference Number Coding	76
3.2 MCH Series Dimension Table of Standard Products	77
3.3 MCH Series Optional Accessories	84
4 ToughCarrier™	
4.1 Features.....	98
4.2 Classification and Series	98
4.3 Accessories.....	100
4.4 Selection of Toughcarrier.....	101
4.5 TCH Series Dimension Table of Standard Products.....	114
4.6 Accessory Specifications	120
4.7 Motor Bracket Compatability Table	133
4.8 Sensor Rail and Top Cover Unit Combination Table.....	134
4.9 Toughcarrier High-Thrust Series	137
5 Technical Materials	
5.1 Sensor Specification.....	139
5.2 Characteristics and Evaluation Method.....	141
5.3 Special Specifications	142
5.4 Maintenance	143
5.5 NSK Clean Grease LG2 Specification	144

Monocarrier™





1.1	Features	4
1.2	Classifications and Series	6
1.3	Optional Components	8
1.4	Selection of Monocarrier™	
1.4.1	Procedures for Selecting Monocarrier™	9
1.4.2	Rigidity	9
1.4.3	Maximum Speed	10
1.4.4	Accuracy Grade	12
1.4.5	Stroke and Ball Screw Lead	12
1.4.6	Basic Load Rating	14
1.4.7	Estimation of Life Expectancy	16
1.4.8	Example of Life Estimation	18

Monocarrier™

1 Monocarrier™

1.1 Features

NSK's Monocarrier™ is the culmination of technology and innovation in linear motion. This lightweight, compact, single-axis linear actuator integrates NSK ball screw, linear guide and support bearings into one unit.



1 Lightweight, Compact Design

- Available in two different product styles depending on application:
 - › Lightweight Type: MCM Series
 - › Rigid Type: MCH Series

2 All-In-One Structure

- The all-in-one structure integrates a ball screw, linear guide and support bearings into a single unit to significantly reduce design and installation time.
- Multiple datum planes, the bottom and a lateral side of the rail, facilitate highly accurate installation.
- A wide selection of fine to high helix leads is available.

3 Long Term, Maintenance-Free Operation

- Use of NSK K1™ Lubrication Unit and grease maintains smooth lubricating performance for long periods in mechanical environments where lubrication is difficult to apply, where use of oil is not permitted because of hygienic issues or where the mechanical equipment requires a high degree of washing out.
- NSK K1™ Lubrication Unit is available for food processing machines and medical equipment.
- Grease for clean environments and for general machinery is available.

4 Superb Anti-Rust Capability

- Rust-resistant, low temperature chrome plating used on bodies and sliders is a standard feature.
- Low temperature fluoride chrome plating provides increased rust protection.

5 Quick Delivery

- Selected sizes are available within 4 week delivery time.
- All standard accessories are available within 4 week delivery time as well.
- Order quantity is limited to 5 pieces.


1.2 Classification and Series

	Lightweight	Beam Rigidity	Moment Rigidity
MCM Series	◎	○	○
MCH Series	○	◎	○


◎ = Excellent Performance ○ = Good Performance

MCM Series Cross-Sections


MCM02




MCM06

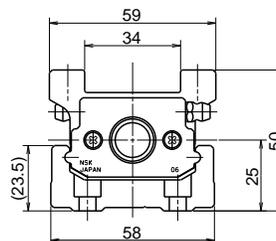


MCM03

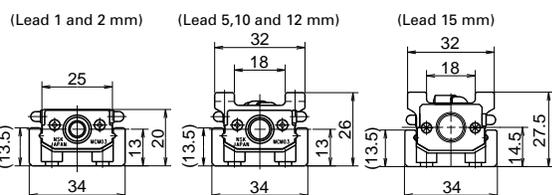


MCM08

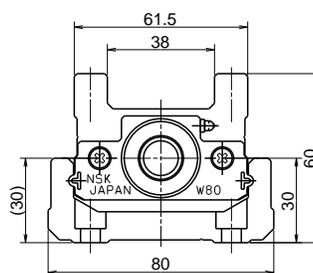

MCM05







MCM10

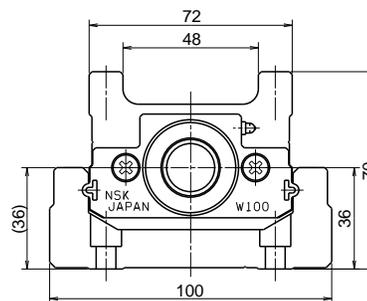

Accuracy	Long Stroke	Size Variation
◎	○	◎
◎	◎	○


◎ = Excellent Performance ○ = Good Performance

MCH Series Cross-Sections

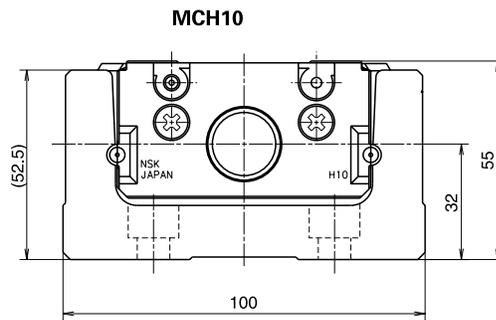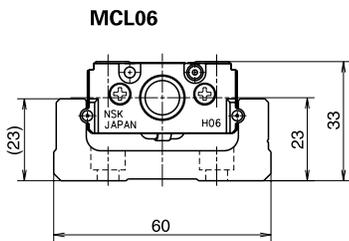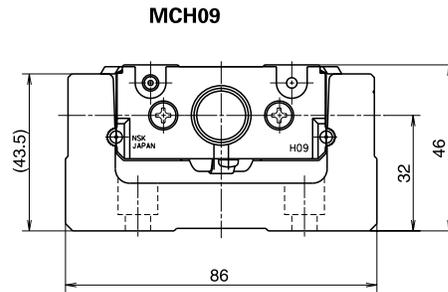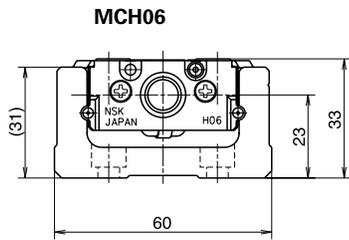

1.3 Optional Components


MCM Series

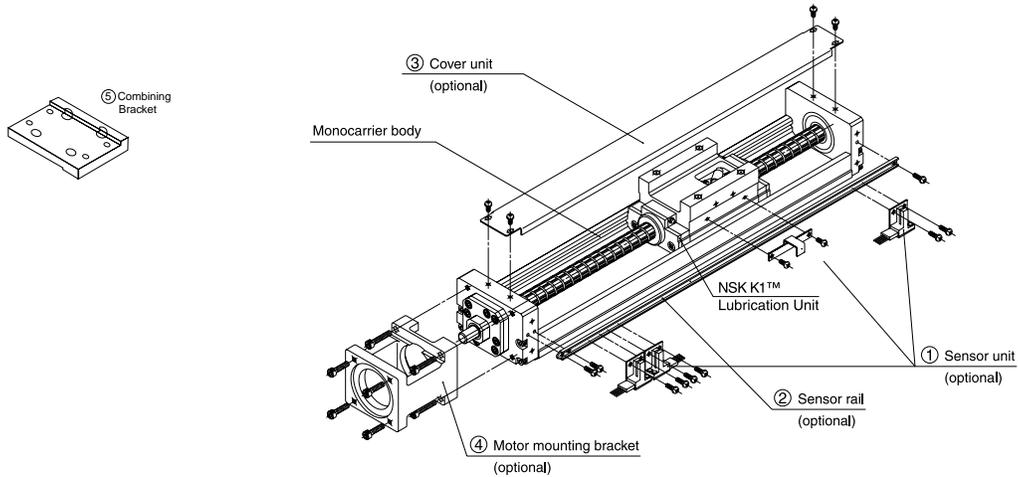

Assembly – Optional Components for MCM10 (example)

- ① Sensor unit: Sensors, sensor mounting parts and a sensor unit are available in a set
 ※ When a sensor unit is used, the full cover unit cannot be used.
 - ② Sensor rail: Rail for sensor mounting is available.
 - ③ Cover unit: Top cover or full cover (includes top cover and side cover) is available.
 - ④ Motor mounting brackets are available for a variety of models.
 - ⑤ Bracket for combining actuators into 2-axis mechanism. When bracket is used, the full cover unit cannot be used.
- ☆ NSK can assemble optional components upon request.

MCH Series

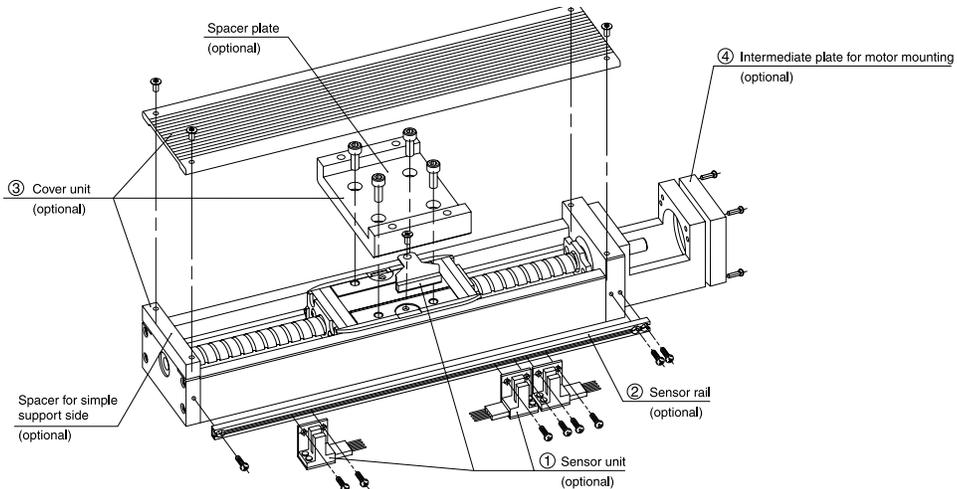

Assembly – Optional Components for MCH10 (example)

- ① Sensor unit: Sensors, sensor mounting parts and a sensor unit are available in a set.
 - ② Sensor rail: Rail for sensor mounting is available.
 - ③ Cover unit: Top cover (includes spacer plate and spacer for simple support side) is available.
 - ④ Intermediate plate for motor mounting available for a variety of models.
- ☆ NSK can assemble optional components upon request.

1.4 Selection of Monocarrier™

1.4.1 Procedures for Selecting Monocarrier™

Select a reference type of Monocarrier™ based on stroke and rigidity.




Select a ball screw lead referring to "1.4.3 Maximum Rotational Speed" so that the rotational speed does not exceed the limit.



Study the loads to be applied to the linear guide and obtain the equivalent load (F_e), substituting them for equation ① or ② on Page 16. Obtain the mean effective load (F_m), substituting them for equation ③ on Page 17, then calculate the life.




Study the loads to be applied to the ball screw and support unit. Obtain the mean effective load (F_m), substituting them for equation ③ on Page 17, then calculate the life.

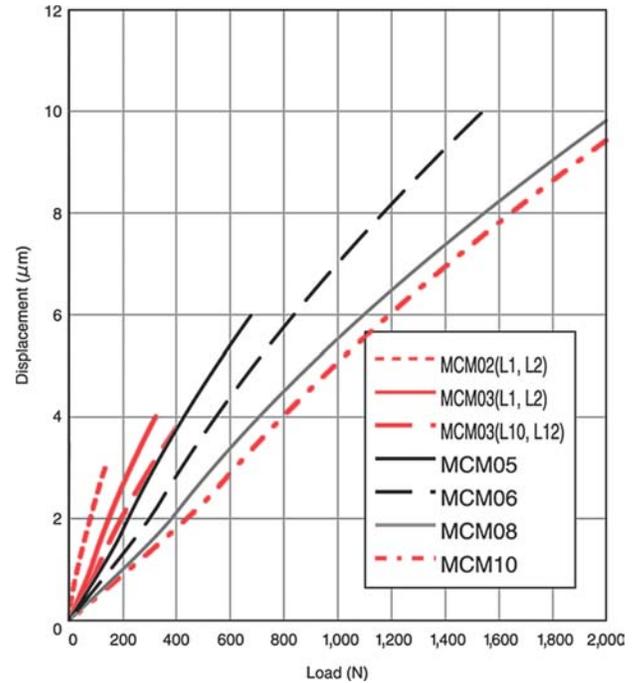


MCM Series Rigidity in Radial Direction

1.4.2. Rigidity

Rigidity of Rail

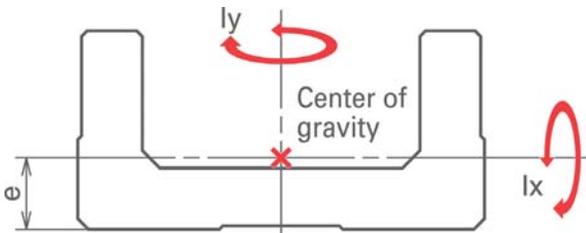

Model No.	Geometrical moment of inertia x 10 ⁴ (mm ⁴)		Center of gravity (mm)	Mass (kg/100mm)
	I _x	I _y		
MCM02	0.097	1.32	3.3	0.11
MCM03	0.300	3.30	4.5	0.18
MCM05	0.780	11.40	6.0	0.31
MCM06	2.140	26.10	7.0	0.57
MCM08	5.900	81.00	9.2	0.88
MCM10	15.600	219.00	12.2	1.52
MCH06	6.500	38.20	10.8	0.67
MCL06	2.580	29.60	7.8	0.56
MCH09	28.700	172.00	15.5	1.48
MCH10	54.000	307.00	18.0	1.93

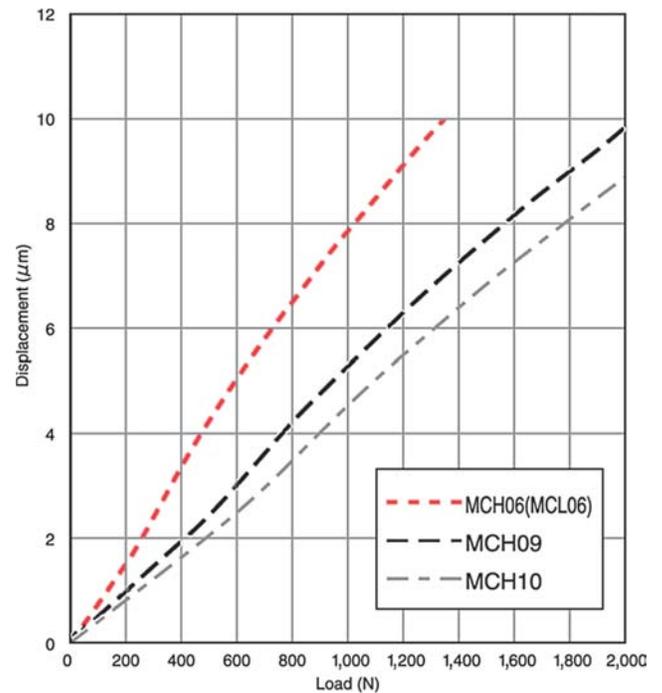

MCH Series Rigidity in Radial Direction

1.4.3 Maximum Speed

Maximum Speed of MCM Series

Maximum speed of Monocarrier™ is determined by the critical speed of ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speeds in the table below.

	Ball screw lead	Stroke (mm)	Rail length L ₂ (mm)	Maximum speed (mm/s)
MCM02 Single slider	1	50	100	50
		100	150	
		150	200	
	2	50	100	100
100		150		
150		200		
MCM03 Single slider	1	50	115	50
		100	190	
		150	240	
	2	50	115	100
		100	190	
		150	240	
	5	50	140	250
		250	340	
	10	50	140	500
		250	340	
	12	50	140	600
		250	340	
15	50	140	750	
	250	340		
MCM05 Single slider	5	50	180	250
		600	730	
	10	50	180	500
		600	730	
	20	50	180	1 000
		600	730	
	30	300	430	2 500
		400	530	
500		630		
		600	730	1 570
	10	60	280	500
		510	730	
20	210	430	1 000	
	510	730		
MCM06 Single slider	5	50	190	250
		700	840	
		800	940	
	10	50	190	500
		700	840	
		800	940	
	20	300	440	1 000
		600	740	
		700	840	
		800	940	

	Ball screw lead	Stroke (mm)	Rail length L ₂ (mm)	Maximum speed (mm/s)	
MCM06 Double slider	5	110	340	250	
		410	640		
	10	110	340	500	
710		940			
20	210	440	1 000		
	710	940			
MCM08 Single slider	5	50	220	250	
		700	870		
		800	970		
	10	50	220	500	
		600	770		
		700	870		
	20	800	970	380	
		50	220		1 000
		600	770		
	30	700	870	980	
		800	970		770
		400	570		
30	500	670	2 480		
	600	770		1 830	
	700	870			1 400
MCM08 Double slider	10	80	370		
		680	970		
20	180	470	1 000		
	680	970			
MCM10 Single slider	10	100	280	500	
		800	980		
		900	1 080		
	20	1 000	1 180	340	
		100	280		1 000
		800	980		
30	900	1 080	840		
	1 000	1 180		690	
	500	680			2 500
30	600	780	2 430		
	700	880		1 870	
	800	980			1 480
MCM10 Double slider	10	70	380		
		670	980		
	20	870	1 180	450	
		170	480		1 000
670	980	910			
870	1 180				

Note: When operating a Monocarrier™ near critical speed or exceeding maximum speed in the table, please consult NSK.

Maximum Speed of MCH Series

Maximum speed of Monocarrier™ is determined by the critical speed of ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speeds on the table below.

	Ball screw lead	Stroke (mm)	Rail length L ₂ (mm)	Maximum speed (mm/s)
MCH06 MCL06 Single slider	5	50	150	250
		500	600	
	10	50	150	500
500		600		
	20	50	150	1 000
		500	600	
MCH06 Double slider	5	100	300	250
		300	400	
	10	100	300	500
400		600		
	20	400	600	1 000
MCH09 Single slider	5	100	240	250
		700	840	210
		800	940	
	10	100	240	500
		700	840	410
		800	940	
20	100	240	1 000	
	700	840	830	
	800	940		
MCH09 Double slider	5	150	440	250
		350	640	
	10	150	440	500
		650	940	
	20	450	440	1 000
650		940	1 000	

	Ball screw lead	Stroke (mm)	Rail length L ₂ (mm)	Maximum speed (mm/s)	
MCH10 Single slider	10	100	280	500	
		800	980		
		900	1 080		
		1 000	1 180		
		20	1 100	1 280	290
			1 200	1 380	250
			100	280	1 000
			800	980	
900	1 080				
1 000	1 180				
MCH10 Double slider	10	1 100	1 280	580	
		1 200	1 380	490	
		250	580	500	
	650	980			
	20	250	580	1 000	
750		1 080	910		
850		1 180			
950		1 280	760		
1 050		1 380	630		

Note: When operating a Monocarrier™ near critical speed or exceeding maximum speed in the table, please consult NSK.

1.4.4 Accuracy Grade

The accuracy grade of Monocarrier™ standard inventories is high grade (H), except for lead 1 and 2 mm of MCM02 and MCM03. When you require strokes longer than 1,200 mm, please consult NSK about the accuracy grade.

(Unit: μm)

Grade	High grade			Precision			
	Stroke (mm)	Repeatability	Running Parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running Parallelism (vertical)
~200	±10	20 or less	± 3	3 or less	20	8	3 or less
~400					25	10	
~600					30	12	
~700					30	15	
~1,000					35	15	
~1,200					40	20	

1.4.5 Stroke and Ball Screw Lead

1.4.5.1 MCM Series Standard Combinations of Stroke and Ball Screw Lead

Single Slider

(● mark: Standard Product)

(Unit: mm)

Model No.	MCM02		MCM03					MCM05				MCM06			MCM08				MCM10				
	1	2	1	2	5	10	12	15	5	10	20	30	5	10	20	5	10	20	30	10	20	30	
50	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
150	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
200					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
250					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
300									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
400									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
500									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
600									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
700									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
800									●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
900																				●	●	●	●
1 000																				●	●	●	●

Double Slider

(● mark: Standard Product)

(Unit: mm)

Model No.	MCM05		MCM06			MCM08		MCM10	
	10	20	5	10	20	10	20	10	20
60	●								
70								●	
80									
110			●	●					
160	●								
170								●	●
180								●	●
210	●	●	●	●	●				
270								●	●
280								●	●
310	●	●	●	●	●				
370								●	●
380								●	●
410	●	●	●	●	●				
470								●	●
480								●	●
510	●	●	●	●	●				
570								●	●
580								●	●
610			●	●					
670								●	●
680								●	●
710			●	●					
870								●	●

Please consult NSK about double slider of MCM02 and MCM03.

1.4.5.2 MCH Series Standard Combinations of Stroke and Ball Screw Lead

Single Slider

(● mark: Standard Product)

(Unit: mm)

Model No.	MCH06			MCH09			MCH10	
	5	10	20	5	10	20	10	20
50	●	●	●					
100	●	●	●	●	●	●	●	●
200	●	●	●	●	●	●	●	●
300	●	●	●	●	●	●	●	●
400	●	●	●	●	●	●	●	●
500	●	●	●	●	●	●	●	●
600				●	●	●	●	●
700				●	●	●	●	●
800				●	●	●	●	●
900							●	●
1,000							●	●
1,100							●	●
1,200							●	●

Double Slider

(● mark: Standard Product)

(Unit: mm)

Model No.	MCH06			MCH09			MCH10	
	5	10	20	5	10	20	10	20
100	●	●						
150				●	●			
200	●	●						
250				●	●		●	●
300	●	●						
350				●	●		●	●
400		●	●					
450					●	●	●	●
550						●	●	●
650					●	●	●	●
750								●
850								●
950								●
1,050								●

Limitations

	Model No.	Lead (mm)	Slider	Stroke (mm)
MCM Series	MCM02	1,2	Single	150
	MCM03	1,2	Single	150
		5,10,12,15	Single	350
	MCM05	5,10,20,30*	Single	900
			Double	810
	MCM06	5,10,20	Single	1,000
			Double	910
MCM08	5,10,20,30*	Single	1,000	
		Double	880	
MCM10	10,20,30*	Single	1,750	
		Double	1,670	
MCH Series	MCH06	5,10,20	Single	600
			Double	500
	MCH09	5,10,20	Single	1,000
			Double	850
	MCH10	10,20	Single	1,750
Double			1,600	
MCL06	5,10,20	Single	500	

*) Applicable only to single slider

1.4.6 Basic Load Rating

1.4.6.1 MCM Series Basic Load Rating

Basic Load Rating


Model No.	Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Limit load (N)
			Ball screw C_s	Linear guide C	Support unit C_s	Rated running distance L_a (km)	Ball screw C_{sa}	Linear guide C_o	
MCM02	1	Ø6	340 (High grade) 405 (Precision)	4 910	615	1	555 (High grade) 615 (Precision)	2 120	490
	2		340 (High grade) 405 (Precision)	3 900		2	555 (High grade) 615 (Precision)		
MCM03	1	Ø6	735	10 900	2 670	1	1 230	4 900	1 040
	2		735	8 650		2			
	5	Ø8	1 810	7 850		5	2 880		
	10		1 230	6 250		10	1 690		
	12		1 230	5 880		12			
15	Ø10	1 760	5 440	15	2 680				
MCM05	5	Ø12	3 760	15 600	4 400	5	6 310	10 900	1 450
	10		2 420	12 400		10	3 790		
	20		2 420	9 850		20	3 790		
	30		3 260	8 600		30	5 400		
MCM06	5	Ø15	7 070	25 200	6 550	5	12 800	17 000	2 730
	10		7 070	20 000		10	12 800		
	20		4 560	15 900		20	7 730		
MCM08	5	Ø15	7 070	30 800	7 100	5	12 800	22 800	3 040
	10		7 070	24 400		10	12 800		
	20		4 560	19 400		20	7 730		
	30		5 070	16 930		30	8 730		
MCM10	10	Ø20	11 000	33 500	7 600	10	21 100	29 400	3 380
	20		7 060	26 600		20	12 700		
	30		11 700	23 200		30	22 700		

Notes • Basic dynamic and static load ratings indicate the values for one slider. • Basic dynamic load rating of the linear guide is the load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate, "Rated running distance" in the table, that is equivalent to 1 million revolutions of the ball screw and the support unit under the same condition without causing flaking by rolling contact fatigue. • Basic dynamic load rating of the ball screw is a load-to-axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue. • Basic dynamic load rating of the support unit is a constant load-to-axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue. • Basic static load rating is a load that results in combined permanent deformations at the contact points of balls and ball grooves of respective part, which is 0.01% of the diameter.

Basic Static Moment Load of Linear Guide

Model No.	Lead (mm)	Slider	Basic static moment (N · m)		
			Rolling M_{R0}	Pitching M_{P0}	Yawing M_{Y0}
MCM02	1, 2	Single	24	8	8
MCM03	1, 2	Single	68	28	28
	10, 12		92	51	51
MCM05	5, 10, 20, 30*	Single	229	89	89
		Double	455	765	765
MCM06	5, 10, 20	Single	415	174	174
		Double	825	1,220	1,220
MCM08	5, 10, 20, 30*	Single	770	300	300
		Double	1,540	2,050	2,050
MCM10	10, 20, 30*	Single	1,170	425	425
		Double	2,340	2,940	2,940

• Basic static moment of double slider is a value when two sliders equipped with NSK K1™ Lubrication Units are butted against each other.
 • The basic static moment is the value when a rolling contact pressure of balls exceeds 4,000N/mm².
 • If operating under extreme load conditions, please consult NSK for estimation of fatigue life.
 *) Applicable only to single slider.

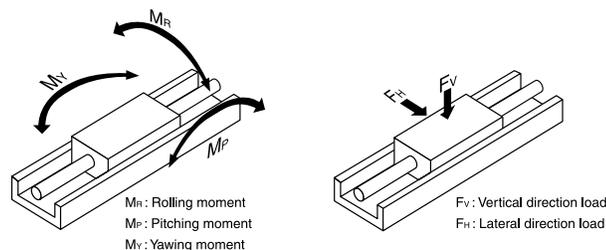

1.4.6.2 MCH Series Basic Load Rating

Basic Load Rating

Model No.	Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Limit load (N)
			Ball screw C _s	Linear guide C	Support unit C _s	Rated running distance La (km)	Ball screw C _{0s}	Linear guide C ₀	
MCH06 (MCL06)	5	∅12	3 760	22 800	4 400	5	6 310	16 300	1 450
	10		2 420	18 100		10	3 790		
	20		2 420	14 400		20	3 790		
MCH09	5	∅15	7 070	40 600	7 100	5	12 800	30 500	3 040
	10		7 070	32 200		10	12 800		
	20		4 560	25 500		20	7 730		
MCH10	10	∅20	11 000	44 600	7 600	10	21 100	42 000	3 380
	20		7 060	35 400		20	12 700		

Notes • Basic dynamic and static load ratings indicate the values for one slider. • Basic dynamic load rating of the linear guide is the load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate, "Rated running distance" in the table, that is equivalent to 1 million revolutions of the ball screw and the support unit under the same condition without causing flaking by rolling contact fatigue. • Basic dynamic load rating of the ball screw is a load-to-axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue. • Basic dynamic load rating of the support unit is a constant load-to-axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue. • Basic static load rating is a load that results in combined permanent deformations at the contact points of balls and ball grooves of respective part, which is 0.01% of the diameter.

Basic Static Moment Load of Linear Guide

Model No.	Slider	Basic static moment (N · m)		
		Rolling M _{Ro}	Pitching M _{Ro}	Yawing M _{Yo}
MCH06 (MCL06)	Single	335	133	133
	Double	770	730	730
MCH09	Single	890	385	385
	Double	1,780	2,070	2,070
MCH10	Single	1,460	610	610
	Double	2,920	3,430	3,430

• Basic static moment of double slider is a value when two sliders equipped with NSK K1™ Lubrication Units are butted against each other.
 • The basic static moment is the value when a rolling contact pressure of balls exceeds 4,000N/mm².
 • If operating under extreme load conditions, please consult NSK for estimation of fatigue life.

1.4.7 Estimation of Life Expectancy

1.4.7.1 Life of Linear Guide

Study the load to be applied to the linear guide of Monocarrier. The equivalent load (F_e) is determined by substituting equation ① or ② depending on the number of sliders.

• Single Slider

$$\textcircled{1} F_e = Y_H F_H + Y_V F_V + Y_R \epsilon_R M_R + Y_P \epsilon_P M_P + Y_Y \epsilon_Y M_Y \dots$$

• Double Slider


$$\textcircled{2} F_e = \frac{Y_H F_H}{2} + \frac{Y_V F_V}{2} + Y_R \epsilon_{Rd} M_R + Y_P \epsilon_{Pd} M_P + Y_Y \epsilon_{Yd} M_Y \dots$$

- F_H : Lateral direction load acting on the slider (N)
- F_V : Vertical direction load acting on the slider (N)
- M_R : Rolling moment acting on the slider (N · m)
- M_P : Pitching moment acting on the slider (N · m)
- M_Y : Yawing moment acting on the slider (N · m)
- $\epsilon_R, \epsilon_{Rd}$: Dynamic equivalent coefficient to rolling moment
- $\epsilon_P, \epsilon_{Pd}$: Dynamic equivalent coefficient to pitching moment
- $\epsilon_Y, \epsilon_{Yd}$: Dynamic equivalent coefficient to yawing moment

Refer to table below for Dynamic Equivalent Coefficient.

Y_H, Y_V, Y_R, Y_P, Y_Y : 1.0 or 0.5

In equations ① and ② for obtaining equivalent load (F_e), among $F_H, F_V, \epsilon_P M_P, \epsilon_R M_R, \epsilon_Y M_Y$, the maximum load is assumed to be 1.0 and others are to be 0.5.

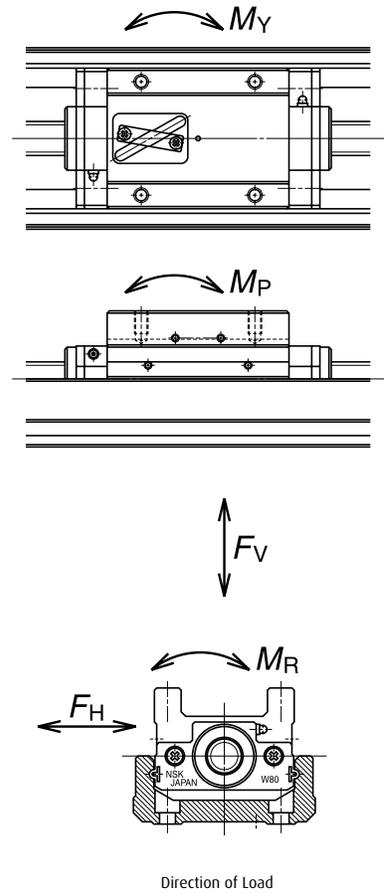


Dynamic Equivalent Coefficient

Model No.	MCM02	MCM03		MCM05	MCM06	MCM08	MCM10	MCH06 MCL06	MCH09	MCH10
		lead 1, 2	lead 5, 10, 12, 15							
ϵ_R	95.2	79.4	79.4	52.6	45.5	32.5	27.8	48.3	34.5	28.6
ϵ_P	174.0	113.9	84.2	81.3	65.1	48.8	45.2	75.1	47.9	41.0
ϵ_Y	174.0	114.0	84.0	81.3	65.1	49.0	45.0	75.1	47.9	41.0
ϵ_{Rd}	-	-	-	26.3	22.7	16.3	13.9	24.2	17.2	14.3
ϵ_{Pd}	-	-	-	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)
ϵ_{Yd}	-	-	-	10.4 (12.2)	9.7 (11.5)	7.6 (8.6)	7.1 (8.0)	11.4 (13.2)	8.11 (9.10)	6.98 (7.82)

Note: Parenthesized figures are dynamic equivalent coefficient in case of the Monocarrier™ without NSK K1™ lubrication unit.

In a case when the load acting on the slider may fluctuate (in general, M_x , M_y may fluctuate with the acceleration/ deceleration of the slider), the mean effective load is determined by Eq. ③.

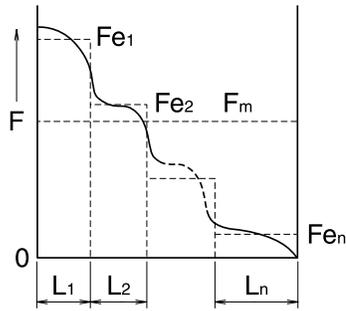

Stepwise Fluctuating Load

Travelling distance under the equivalent load Fe_1 : L_1
 Travelling distance under the equivalent load Fe_2 : L_2

 Travelling distance under the equivalent load Fe_n : L_n

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 L_1 + Fe_2^3 L_2 + \dots + Fe_n^3 L_n)} \dots \textcircled{3}$$

F_m : Mean effective load of fluctuating loads
 L : Total travelling distance

The life of the linear guide is calculated by Eq. ④

$$L = L_a \left[\frac{C}{f_w \cdot F_m} \right]^3 \dots \textcircled{4}$$

L : Life of the linear guide (km)
 F_m : Mean effective load acting on the linear guide (N)
 C : Basic dynamic load rating of the linear guide (N)
 L_a : Travelling distance (km)
 f_w : Load factor (Refer to Values of Load Factor table)

When the estimated life does not meet the required life, the life of the linear guide is to be calculated again after the following measures are taken:

1. Change from the single slider type to double slider type.
2. Use a larger size Monocarrier™.

1.4.7.2 Life of Ball Screw (Support Unit)

The mean effective load is determined from the axial loads. For calculation of the mean effective load, use Eq. ③.

The life of the ball screw is calculated by Eq. ⑤.

$$L = \ell \times \left[\frac{C_a}{f_w \cdot F_m} \right]^3 \times 10^6 \dots \textcircled{5}$$

ℓ : Lead of ball screw (mm)
 L : Life of ball screw (mm)
 C_a : Basic dynamic load rating of the ball screw (N)
 F_m : Mean effective load acting on the ball screw (N)
 f_w : Load factor (Refer to Values of Load Factor table)

The life of the support unit is calculated by Eq. ⑤.

If the life of the ball screw/support unit does not meet the required life, use a larger size Monocarrier™.


Upon calculations as mentioned above, the selection of the Monocarrier™ is completed.

Values of Load Factor f_w

Operating Conditions	Load Factor f_w
At smooth operation with no mechanical shock	1.0-1.2
At normal operation	1.2-1.5
At operation with mechanical shock and vibrations	1.5-3.0

1.4.8 Example of Life Estimation

This section offers an example of how to estimate the life of the Monocarrier based on the life of each component.

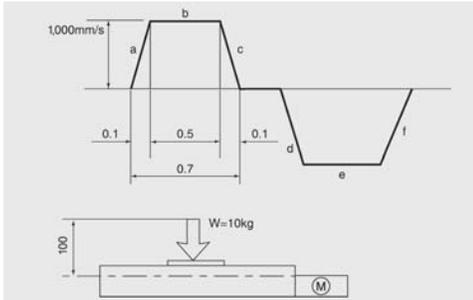

1 Use condition

Stroke	: 600mm
Maximum Speed	: 1,000mm/s
Load Mass	: W=10kg
Acceleration	: g=9.8m/s ²
Setting Position	: Horizontal
Operating Profile	: See above figure

2 Selection of Model Number (Interim Selection)

First, select a greater ball screw lead since the maximum speed is 1,000mm/s. The interim selection is MCM06060H20K00, a single slider specification MCM06 that has a 600mm stroke, since the stroke is 600mm.

3 Calculation

3-1 Linear Guide

3-1-1 Fatigue Life

Multiply the result of the Eq. ① by the dynamic equivalent coefficient to convert the load volume. From the above operation profile,

- i) Constant speed $Fe_1 = Y_v F_v = Y_v W g = 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$
- ii) Accelerating $Fe_2 = Y_v F_v + Y_f \varepsilon_p M_p = 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100 = 700 \text{ N}$
- iii) Decelerating $Fe_3 = Y_v F_v + Y_f \varepsilon_p M_p = 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100 = 700 \text{ N}$

Mean effective load F_m

$$\begin{aligned}
 F_m &= \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)} \\
 &= \sqrt[3]{\frac{1}{600} (98^3 \cdot 500 + 700^3 \cdot 50 + 700^3 \cdot 50)} \\
 &= 387 \text{ N} \\
 L &= \left(\frac{C}{f_w \cdot F_m} \right)^3 \times L_a \\
 &= \left(\frac{15,900}{1.2 \cdot 387} \right)^3 \times 20 \\
 &= 8.02 \times 10^5 \text{ km}
 \end{aligned}$$

3-1-2 Static Safety Factor

Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{17,000}{700} = 24.2$$

3-2 Ball Screw

3-2-1 Fatigue Life

Obtain the axial load of each stage of operation, referring to the operation profile, and then calculate the mean load.

By the process above,

- i) Constant speed $Fe_1 = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98$
- ii) Accelerating $Fe_2 = Fe_1 + W \cdot \alpha = 101 \text{ N}$
- iii) Decelerating $Fe_3 = Fe_1 - W \cdot \alpha = 99 \text{ N}$

Axial mean effective load F_m

$$\begin{aligned}
 F_m &= \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)} \\
 &= \sqrt[3]{\frac{1}{600} (0.98^3 \cdot 500 + 101^3 \cdot 50 + 99^3 \cdot 50)} \\
 &= 55 \text{ N} \\
 L &= \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times l \times 10^6 \\
 &= \left(\frac{4,560}{1.2 \cdot 55} \right)^3 \times 20 \times 10^6 \text{ (mm)} \\
 &= 6.5 \times 10^6 \text{ km}
 \end{aligned}$$

3-2-2 Static Safety Factor

Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{7,750}{101} = 76.5$$

3-2-3 Maximum Rotational Speed

According to the table of maximum rotational speed, MCM06 with 20mm lead and 600mm stroke is possible to operate under the maximum speed of 1,000mm/s.

3-3 Support Unit

3-3-1 Fatigue Life

Use the axial load $F_m = 55 \text{ N}$, resulting from the calculation 3-2-1 (above).

$$\begin{aligned}
 L &= \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times l \times 10^6 = \left(\frac{6,550}{1.2 \times 55} \right)^3 \times 20 \times 10^6 \text{ (mm)} \\
 &= 1.95 \times 10^7 \text{ km}
 \end{aligned}$$

3-3-2 Static Safety Factor


Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2,730}{101} = 27.0$$

3-4 Result


MCM06060H20K00	Linear guide	Ball screw	Support unit
Fatigue life	8.02 × 10 ⁵	6.5 × 10 ⁶	1.95 × 10 ⁷
Static safety factor	24.2	76.7	27.0

In this case, the linear guide has the shortest fatigue life of the components. Therefore, the linear guide fatigue life is used as the life of the Monocarrier. The interim selection of MCM06060H20K00, that is chosen based on the use conditions, satisfies the required life.

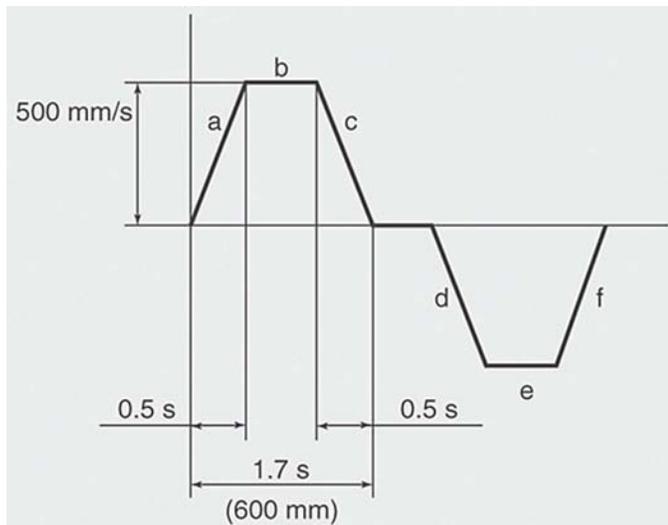

1 Use condition

- Stroke : 600 mm
- Maximum speed : 500 mm/s
- Load mass : W = 20 kg
- Acceleration : 9.8 m/s²
- Setting position : Horizontal
- Operating profile : See above figure



2 Selection of Model number (Interim Selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.

The interim selection is MCM08068H10D00 as a double slider specification of MCM08 has 680 mm stroke, and the setting position is vertical.

4 Calculation

4-1 Linear Guide

4-1-1 Fatigue Life

Multiply the result of the Eq. 2) by the dynamic equivalent coefficient to convert the load volume. From operation profile, the acceleration is 1 m/s².

i) Constant speed $F_{e1} = Y_P \times \epsilon_{Pd} \times M_P + Y_V \times \epsilon_{Vd} \times M_V = 1 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.1 = 298 \text{ N}$

ii) Accelerating $F_{e2} = Y_P \times \epsilon_{Pd} \times M_P + Y_V \times \epsilon_{Vd} \times M_V = 1 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.1 = 329 \text{ N}$

iii) Decelerating $F_{e3} = Y_P \times \epsilon_{Pd} \times M_P + Y_V \times \epsilon_{Vd} \times M_V = 1 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.15 + 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.1 = 268 \text{ N}$

Mean effective load *Fm*

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (298^3 \cdot 350 + 329^3 \cdot 125 + 268^3 \cdot 125)}$$

$$= 300 \text{ N}$$

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m} \right)^3$$

$$= 10 \times \left(\frac{24\,400}{1.2 \cdot 300} \right)^3$$

$$= 3.11 \times 10^6 \text{ km}$$

4-1-2 Static Safety Factor

Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{22\,800}{329} = 69.3$$

4-2 Ball Screw

4-2-1 Fatigue Life

Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

i) Constant speed $F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$

ii) Accelerating $F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1 = 216 \text{ N}$

iii) Decelerating $F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1 = 176 \text{ N}$

Monocarrier™

Axial mean effective load F_m

$$\begin{aligned} F_m &= \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)} \\ &= \sqrt[3]{\frac{1}{600} (196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125)} \\ &= 197 \text{ N} \end{aligned}$$

$$\begin{aligned} L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \\ &= 10 \times \left(\frac{7\,060}{1.2 \cdot 197} \right)^3 \times 10^6 \text{ (mm)} \\ &= 2.66 \times 10^5 \text{ km} \end{aligned}$$

4-2-2 Static Safety Factor

Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_e} = \frac{12\,800}{216} = 59.2$$

4-3 Support Unit

4-3-1 Fatigue Life

Use the axial load $F_m = 197 \text{ N}$, that is the result of above calculation 3-2-1.

$$\begin{aligned} L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 = 10 \times \left(\frac{7\,100}{1.2 \times 197} \right)^3 \times 10^6 \text{ (mm)} \\ &= 2.70 \times 10^5 \text{ km} \end{aligned}$$

4-3-2 Static Safety Factor

Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_e} = \frac{3\,040}{216} = 14.0$$

4-4 Result

MCM08068H10D00	Linear guide	Ball screw	Support unit
Fatigue life	$3.11 \times 10^6 \text{ km}$	$2.66 \times 10^5 \text{ km}$	$2.70 \times 10^5 \text{ km}$
Static safety factor	69.3	59.2	14.0





2.1	MCM Series Reference Number Coding	24
2.2	MCM Series Dimension Table of Standard Products	
	MCM02	25
	MCM03	26
	MCM05	29
	MCM06	32
	MCM08	35
	MCM10	38
2.3	MCM Series Optional Accessories	
2.3.1	Sensor Unit	41
2.3.2	Cover Unit	45
2.3.3	Motor Bracket	
	By NEMA Size	47
	By Standard Size	54
2.3.4	Combining Brackets	70

2 MCM Series

2.1 MCM Series Reference Number Coding

[Body]

MC	M	08	040	H	10	K	0	0
MONOCARRIER	SERIES	NOMINAL SIZE	STROKE	ACCURACY GRADE	BALL SCREW LEAD	SLIDER SPECIFICATION	GREASE SPECIFICATION	NSK MANAGEMENT NUMBER
MC: Monocarrier	M: MCM Series	Rail width, unit: 10 mm	Unit: 10 mm	H: High Precision P: Precision Grade	Unit: mm	K: Single slider D: Double slider	0: Standard AS2 B: Clean Grease LG2	

[With Optional Accessories]

MC	E	08	040	H	10	K	0	0	0
	OPTIONAL ACCESSORIES					NSK MANAGEMENT NUMBER	SENSOR UNIT	COVER UNIT	MOTOR BRACKET
	E: With Optional Accessories								

Note: Optional components are available separately.

Sensor Unit

Reference Number Code	Specification	Reference Number
0	N/A	—
1	Proximity switch (normally close contact 3 pieces)	MC - SRxx - 10
2	Proximity switch (normally open contact 3 pieces)	MC - SRxx - 11
3	Proximity switch (normally open contact 1 piece, normally close contact 2 pieces)	MC - SRxx - 12
4	Photo sensor 3 piece	MC - SRxx - 13

Note xx: Reference number

Cover Unit

Reference Number Code	Specification	Reference Number
0	N/A	—
1	With top cover	MC - CVxxxx - 01 (02) ※
2	Full cover	MC - CVxxxx - 00

Note: ※ Monocarrier "02" is only used for MCM03.


Note xxxxx: Reference number and stroke number

The Reference Number of Motor Bracket

Reference Number Code	Reference Number				
	MCM03	MCM05	MCM06	MCM08	MCM10
0	N/A	N/A	N/A	N/A	N/A
1	MC-BK03-146-00	MC-BK05-145-00	MC-BK06-145-00	MC-BK08-145-00	MC-BK10-170-00
2	MC-BK03-148-01	MC-BK05-146-00	MC-BK06-146-00	MC-BK08-146-00	MC-BK10-170-01
3	MC-BK03-231-00	MC-BK05-148-00	MC-BK06-148-00	MC-BK08-160-00	MC-BK10-190-00
4	—	MC-BK05-160-00	MC-BK06-160-00	MC-BK08-170-00	MC-BK10-270-00
5	—	MC-BK05-250-00	MC-BK06-170-00	MC-BK08-170-01	—
6	—	—	MC-BK06-170-01	MC-BK08-190-00	—
7	—	—	MC-BK06-250-00	MC-BK08-250-00	—
8	—	—	—	MC-BK08-270-00	—

2.2 MCM Series Dimension Table of Standard Products

MCM02

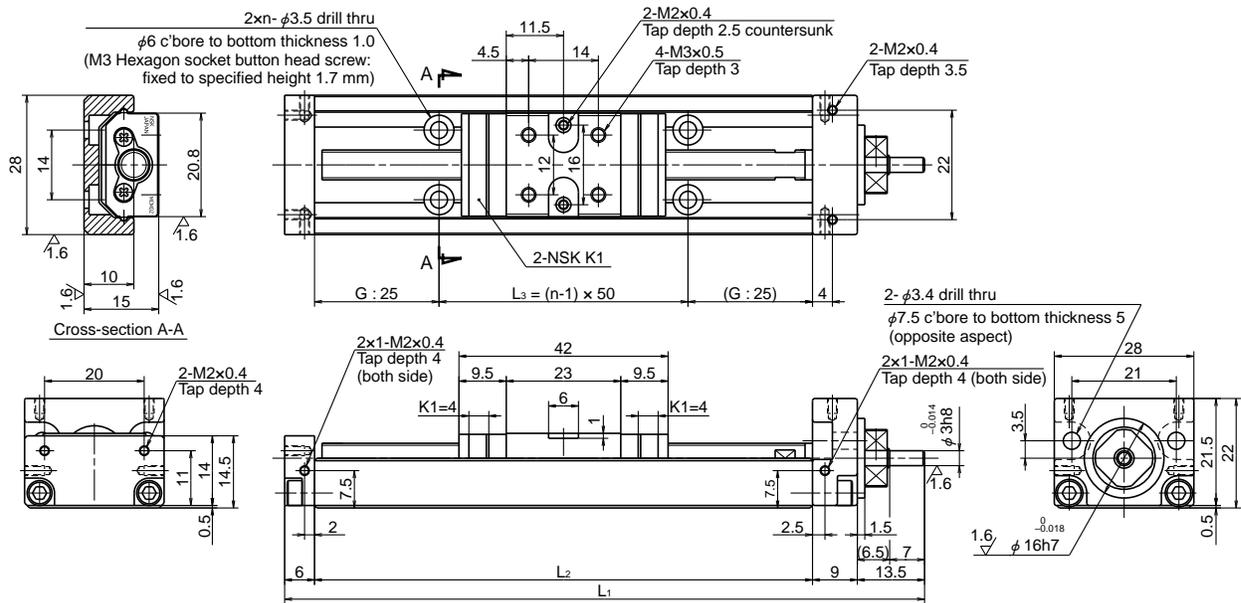

Dimension of MCM02 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia $\times 10^{-7}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM02005H01K	50	58	1	128.5	100	50	2	0.93	0.26
MCM02005P01K									
MCM02005H02K									
MCM02005P02K									
MCM02010H01K	100	108	1	178.5	150	100	3	1.36	0.32
MCM02010P01K									
MCM02010H02K									
MCM02010P02K									
MCM02015H01K	150	158	1	228.5	200	150	4	1.81	0.39
MCM02015P01K									
MCM02015H02K									
MCM02015P02K									

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	High grade		Precision
	1	0.1 - 1.3	
2	0.1 - 1.3		0.2 - 1.6

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
1	Ø6	340 (High grade)	4,910	615	1	555 (High grade)	2,120	490
		405 (Precision)				615 (Precision)		
2	Ø6	340 (High grade)	3,900	615	2	555 (High grade)	2,120	490
		405 (Precision)				615 (Precision)		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	24	8	8

MCM03

Accuracy Grade: Precision (P)

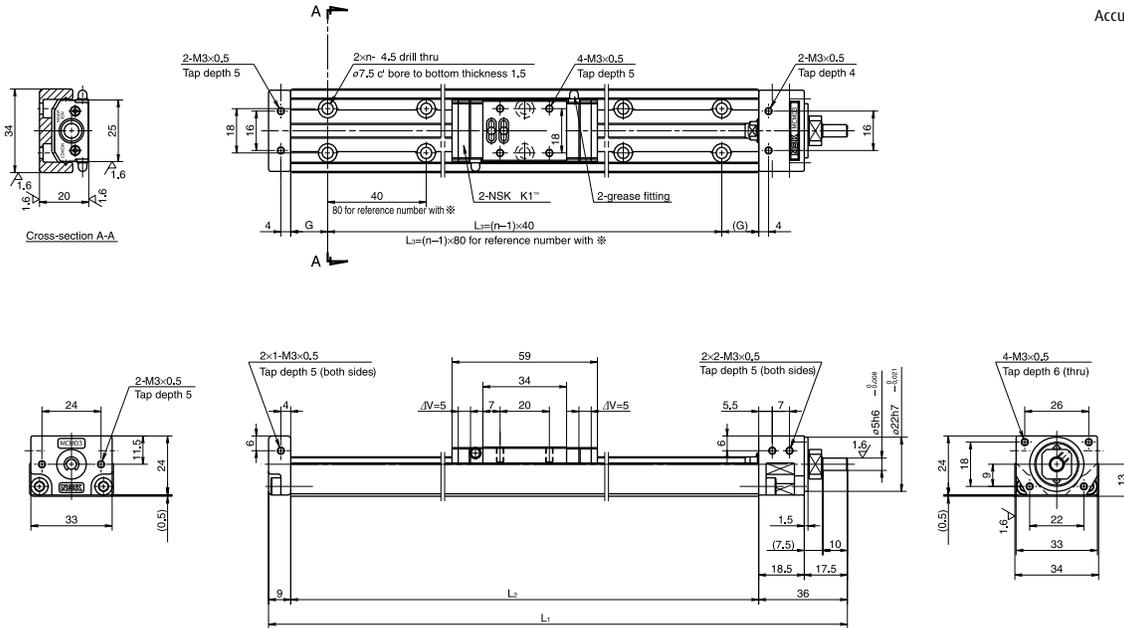

Dimension of MCM03 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-5}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃			
MCM03005P01K00	50	56 (66)	1	160	115	17.5	80	2	0.015	0.6
*MCM03005P02K00			2							
*MCM03010P01K00	100	131 (141)	1	235	190	15.0	160	5	0.021	0.7
MCM03010P02K00			2							
MCM03015P01K00	150	181 (191)	1	285	240	20.0	200	6	0.025	0.8
MCM03015P02K00			2							

Bolt hole pitch L₁ on the items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	1	0.2 - 1.7
2		

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. Optional spacer is required when cover unit or sensor unit for MCM03 with the lead of 1 or 2mm.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
1	Ø6	735	10,900	2,670	1	1,230	4,900	1,040
2		735	8,650		2			

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Vo}	Yawing M _{Yo}
Single	68	28	28

MCM03

Accuracy Grade: High Grade (H)

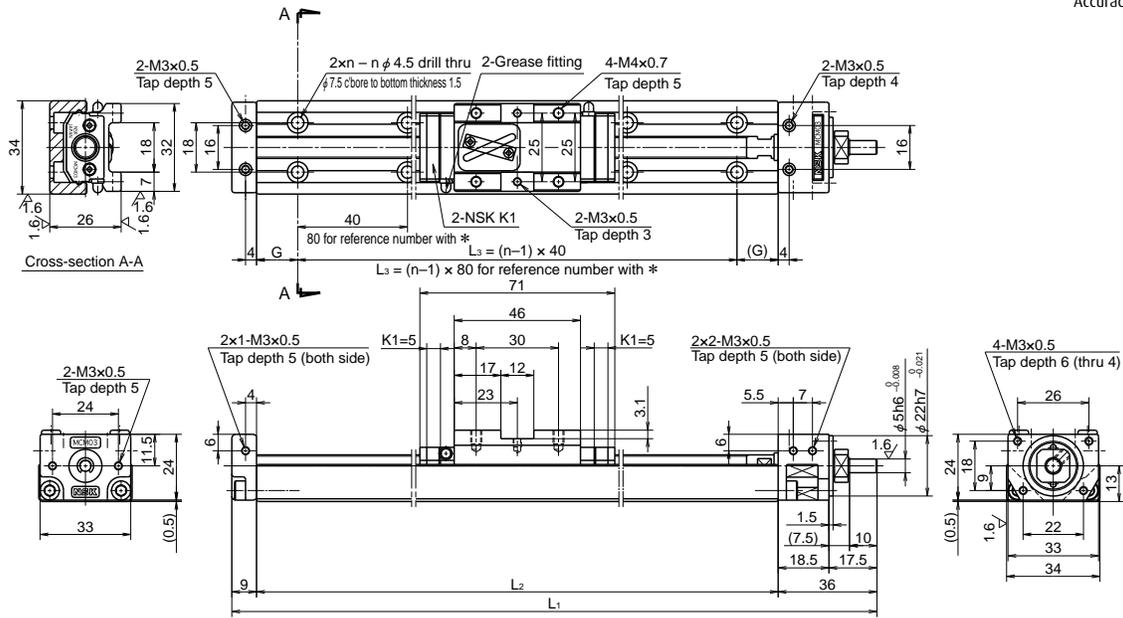

Dimension of MCM03 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia ×10 ⁵ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃			
*MCM03005H05K00	50	69 (79)	5	185	140	30	80	2	0.057	0.6
*MCM03005H10K00			10							
*MCM03005H12K00			12							
MCM03010H05K00	100	119 (129)	5	235	190	15	160	5	0.073	0.7
MCM03010H10K00			10							
MCM03010H12K00			12							
MCM03015H05K00	150	169 (179)	5	285	240	20	200	6	0.089	0.8
MCM03015H10K00			10							
MCM03015H12K00			12							
MCM03020H05K00	200	219 (229)	5	335	290	25	240	7	0.104	0.9
MCM03020H10K00			10							
MCM03020H12K00			12							
MCM03025H05K00	250	269 (279)	5	385	340	30	280	8	0.120	1.0
MCM03025H10K00			10							
MCM03025H12K00			12							

Note: Bolt hole pitch L on items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	5	0.2 - 2.5
	10	0.3 - 3.0
	12	0.3 - 3.0

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø8	1,810	7,850	2,670	5	2,880	6,620	1,040
10		1,230	6,250		10			
12		5,880	12		1,690			

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	92	51	51

MCM03

Accuracy Grade: High Grade (H)

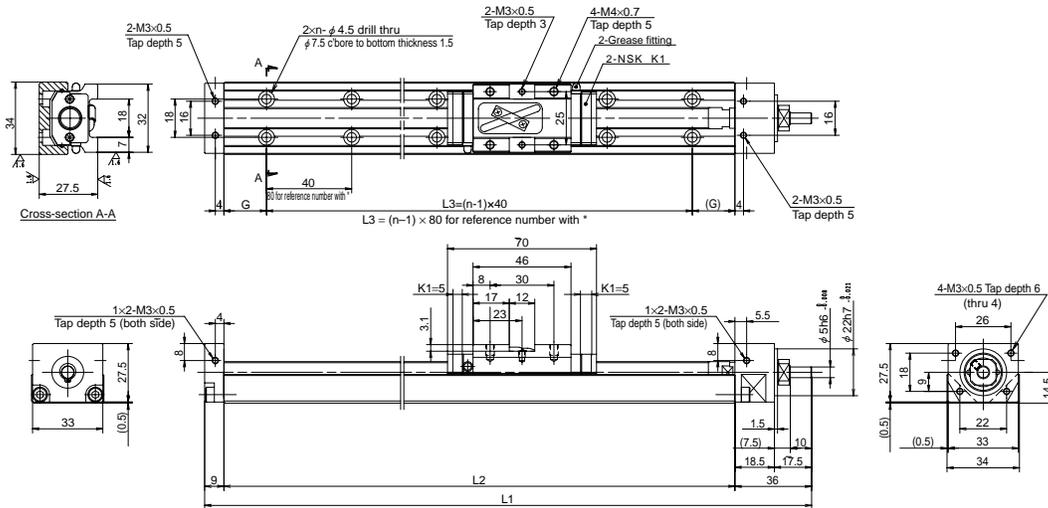

Dimension of MCM03 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1 TM)	Ball screw lead (mm)	Ball screw diameter (mm)	Body length (mm)				No. of mounting holes	Inertia ×10 ⁻⁴ (kg · m ²)	Mass (kg)
					L ₁	L ₂	G	L ₃			
*MCM03005H15K00	50	70 (80)	15	Ø10	185	140	30	80	2	0.183	0.67
MCM03010H15K00	100	120 (130)			235	190	15	160	5	0.222	0.77
MCM03015H15K00	150	170 (180)			285	240	20	200	6	0.260	0.87
MCM03020H15K00	200	220 (230)			335	290	25	240	7	0.298	0.97
MCM03025H15K00	250	270 (280)			385	340	30	280	8	0.336	1.07

Bolt hole pitch L₃ on the items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	15	0.3 - 5.6
----------------------	----	-----------

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.
4. When a cover unit is added, an optional spacer plate is required.

Basic Load Rating


Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C ₀	Linear guides C	Support unit C ₀	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
15	Ø10	1,760	5,440	2,670	15	2,680	6,620	1,040

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	92	51	51

MCM05

Accuracy Grade: High Grade (H)

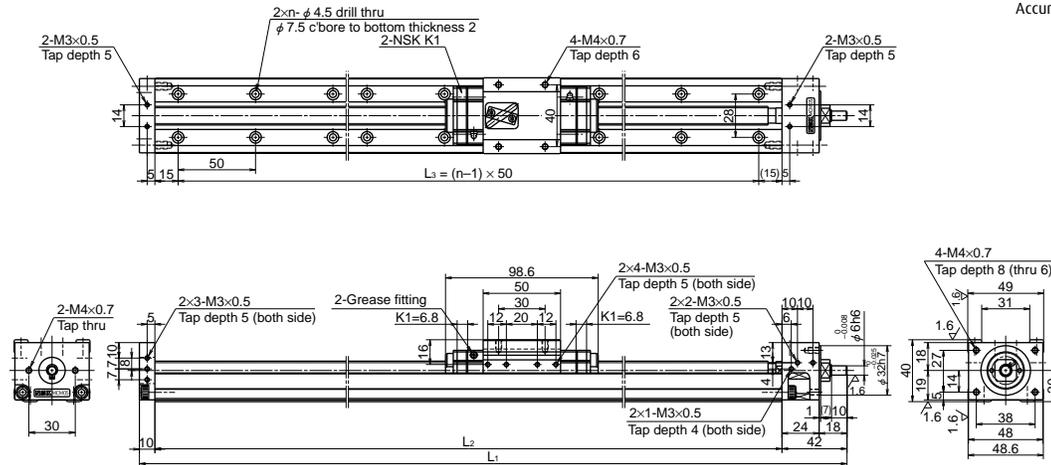

Dimension of MCM05 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes	Inertia $\times 10^{-4}$ (kg \cdot m 2)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM05005H05K00	50	81 (95)	5	232	180	150	4	0.025	1.4
MCM05005H10K00			10						
MCM05005H20K00			20						
MCM05010H05K00	100	131 (145)	5	282	230	200	5	0.031	1.6
MCM05010H10K00			10						
MCM05010H20K00			20						
MCM05015H05K00	150	181 (195)	5	332	280	250	6	0.036	1.8
MCM05015H10K00			10						
MCM05015H20K00			20						
MCM05020H05K00	200	231 (245)	5	382	330	300	7	0.042	2.0
MCM05020H10K00			10						
MCM05020H20K00			20						
MCM05025H05K00	250	281 (295)	5	432	380	350	8	0.047	2.2
MCM05025H10K00			10						
MCM05025H20K00			20						

Monocarrier dynamic torque specification (N \cdot cm)

Ball screw lead (mm)	5	10 - 4.8
10	1.1 - 5.8	
20	1.6 - 7.9	
30	1.8 - 11.1	

1. Frictional resistance of NSK K1™ is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C ₀	Linear guides C	Support unit C ₀	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø12	3,760	15,600	4,400	5	6,310	10,900	1,450
10		2,420	12,400		10	3,790		
20		2,420	9,850		20	3,790		
30		3,260	8,600		30	5,400		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N \cdot m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	229	89	89

MCM05 (Double Slider)

Accuracy Grade: High Grade (H)

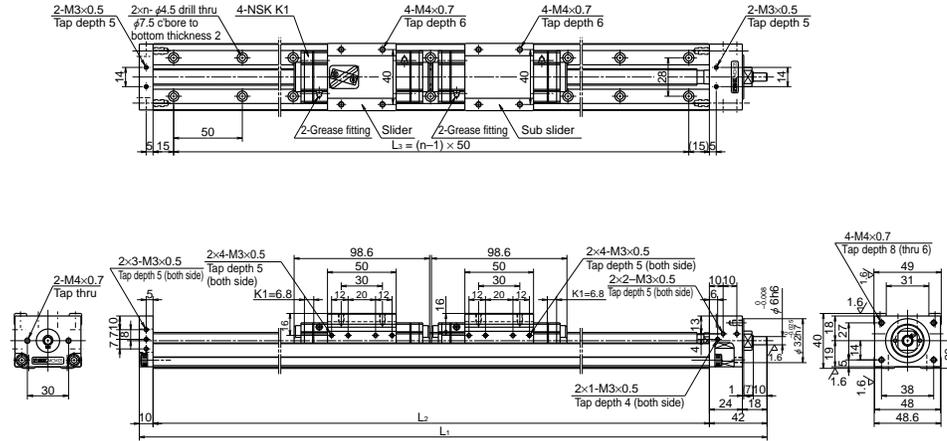

Dimension of MCM05 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes	Inertia ×10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM05006H10D00	60	83 (110)	10	332	280	250	6	0.058	2.3
MCM05011H10D00	110	133 (160)	10	382	330	300	7	0.064	2.5
MCM05016H10D00	160	183 (210)	10	432	380	350	8	0.070	2.7
MCM05021H10D00	210	232 (260)	10	482	430	400	9	0.075	2.8
MCM05021H20D00	210	232 (260)	20	482	430	400	9	0.151	2.8
MCM05031H10D00	310	332 (360)	10	582	530	500	11	0.086	3.2
MCM05031H20D00	310	332 (360)	20	582	530	500	11	0.162	3.2
MCM05041H10D00	410	432 (460)	10	682	630	600	13	0.098	3.6
MCM05041H20D00	410	432 (460)	20	682	630	600	13	0.174	3.6
MCM05051H10D00	510	532 (560)	10	782	730	700	15	0.109	4.2
MCM05051H20D00	510	532 (560)	20	782	730	700	15	0.185	4.2

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	10	1.5 - 7.6
20	2.3 - 11.8	

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
5	∅12	3,760	15,600	4,400	5	6,310	10,900	1,450
10		2,420	12,400		10	3,790		
20		2,420	9,850		20	3,790		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Double	455	765	765

MCM06

Accuracy Grade: High grade (H)

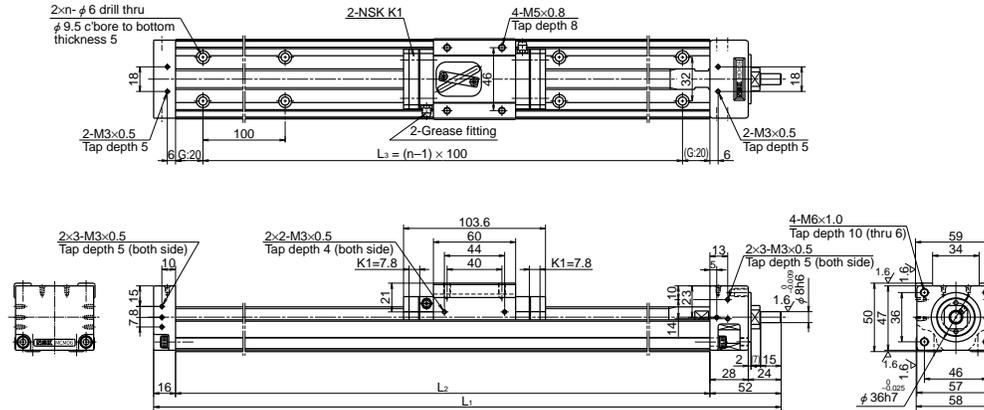

Dimension of MCM06 (Single slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCM06005H05K02	50	86 (102)	5	258	190	100	2	0.066	2.7
*MCM06005H10K00			10						
*MCM06005H20K00			20						
MCM06010H05K02	100	136 (152)	5	308	240	200	3	0.080	3.0
MCM06010H10K00			10						
MCM06010H20K00			20						
*MCM06015H05K02	150	186 (202)	5	358	290	200	3	0.095	3.5
*MCM06015H10K00			10						
*MCM06015H20K00			20						
MCM06020H05K02	200	236 (252)	5	408	340	300	4	0.110	3.8
MCM06020H10K00			10						
MCM06020H20K00			20						
*MCM06025H05K02	250	286 (302)	5	458	390	300	4	0.125	4.2
*MCM06025H10K00			10						
*MCM06025H20K00			20						
MCM06030H05K02	300	336 (352)	5	508	440	400	5	0.139	4.5
MCM06030H10K00			10						
MCM06030H20K00			20						

Notes: 1). Dimension G is 45 for items marked with *.

2). The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	5	10	20
5	1.9 - 7.4		
10	2.2 - 8.6		
20	2.8 - 11.0		

- Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
- Grease is packed into the ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
5	Ø15	7,070	25,200	6,550	5	12,800	17,000	2,730
10		7,070	20,000		10	12,800		
20		4,560	15,900		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	415	174	174

MCM06

Accuracy Grade: High Grade (H)

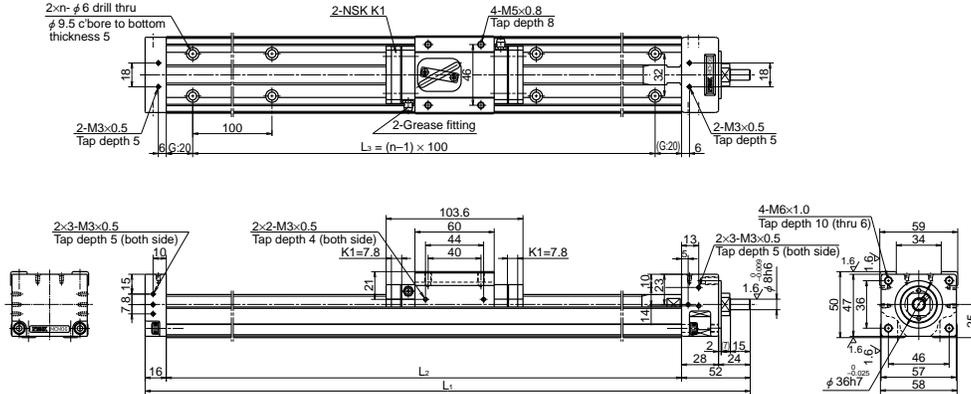

Dimension of MCM06 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia ×10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM06040H05K02	400	436 (452)	5	608	540	500	6	0.169	5.2
MCM06040H10K00			10						
MCM06040H20K00			20						
MCM06050H05K02	500	536 (552)	5	708	640	600	7	0.198	6.0
MCM06050H10K00			10						
MCM06050H20K00			20						
MCM06060H05K02	600	636 (652)	5	808	740	700	8	0.228	6.7
MCM06060H10K00			10						
MCM06060H20K00			20						
MCM06070H05K02	700	736 (752)	5	908	840	800	9	0.257	7.4
MCM06070H10K00			10						
MCM06070H20K00			20						
MCM06080H05K02	800	836 (852)	5	1,008	940	900	10	0.286	8.1
MCM06080H10K00			10						
MCM06080H20K00			20						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	5	1.9 - 7.4
	10	2.2 - 8.6
	20	2.8 - 11.0

- Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
- Grease is packed into the ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Rated running distance L _s (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø15	7,070	25,200	6,550	5	12,800	17,000	2,730
10		7,070	20,000		10	12,800		
20		4,560	15,900		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Single	415	174	174

MCM06 (Double Slider)

Accuracy Grade: High Grade (H)

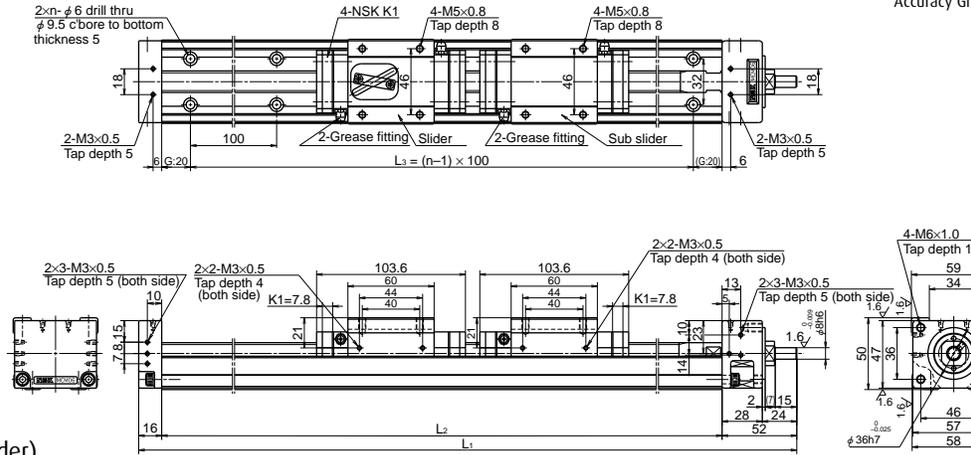

Dimension of MCM06 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM06011H05D02	110	132 (164)	5	408	340	300	4	0.114	4.4
MCM06011H10D00			10						
MCM06021H05D02	210	232 (264)	5	508	440	400	5	0.143	5.1
MCM06021H10D00			10						
MCM06031H05D02	310	332 (364)	5	608	540	500	6	0.173	5.8
MCM06031H10D00			10						
MCM06031H20D00			20					0.286	
MCM06041H05D02	410	432 (464)	5	708	640	600	7	0.202	6.6
MCM06041H10D00			10						
MCM06041H20D00			20					0.316	
MCM06051H10D02	510	532 (564)	10	808	740	700	8	0.254	7.3
MCM06051H20D00			20						
MCM06061H10D02	610	632 (664)	10	908	840	800	9	0.283	8.0
MCM06061H20D00			20						
MCM06071H10D02	710	732 (764)	10	1,008	940	900	10	0.313	8.7
MCM06071H20D00			20						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	O2
	10, 20	O0
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	Monocarrier dynamic torque specification (N · cm)	
	5	2.3 - 8.5
	10	2.7 - 10.9
20	4.0 - 15.9	

- Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
- Grease is packed into the ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.


Basic Load Rating

Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
5	Ø15	7,070	25,200	6,550	5	12,800	17,000	2,730
10		7,070	20,000		10	12,800		
20		4,560	15,900		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Double	825	1,220	1,220

MCM08

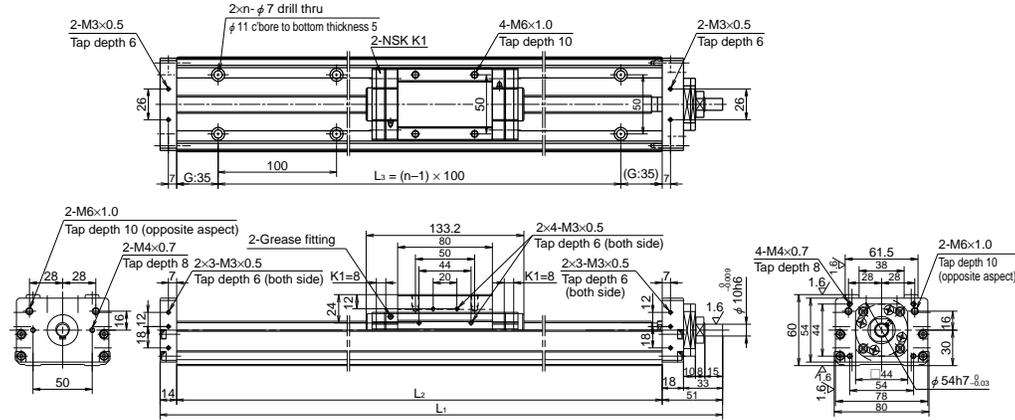

Accuracy grade: High grade (H)

Dimension of MCM08 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia ×10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM08040H05K02	400	436 (452)	5	635	570	500	6	0.185	7.4
MCM08040H10K00			10						
MCM08040H20K00			20						
MCM08040H30K00			30						
MCM08050H05K02	500	536 (552)	5	735	670	600	7	0.214	8.4
MCM08050H10K00			10						
MCM08050H20K00			20						
MCM08050H30K00			30						
MCM08060H05K02	600	635 (652)	5	835	770	700	8	0.244	9.3
MCM08060H10K00			10						
MCM08060H20K00			20						
MCM08060H30K00			30						
MCM08070H05K02	700	736 (752)	5	935	870	800	9	0.273	10.5
MCM08070H10K00			10						
MCM08070H20K00			20						
MCM08070H30K00			30						
MCM08080H05K02	800	836 (852)	5	1,035	970	900	10	0.303	11.2
MCM08080H10K00			10						
MCM08080H20K00			20						
MCM08080H30K00			30						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	Lead	High-grade, precision-grade
Standard	5	02
	10, 20	00
LG2	5	B2
	10, 20	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	Monocarrier dynamic torque specification (N · cm)	
	5	1.0 - 5.9
	10	2.0 - 7.8
	20	2.5 - 10.8
30	2.8 - 12.0	

- Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
- Grease is packed into the ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Rated running distance L _s (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø15	7,070	30,800	7,100	5	12,800	22,800	3,040
10		7,070	24,400		10	12,800		
20		4,560	19,400		20	7,730		
30		5,070	16,930		30	8,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	770	300	300

MCM08 (Double Slider)

Accuracy Grade: High Grade (H)

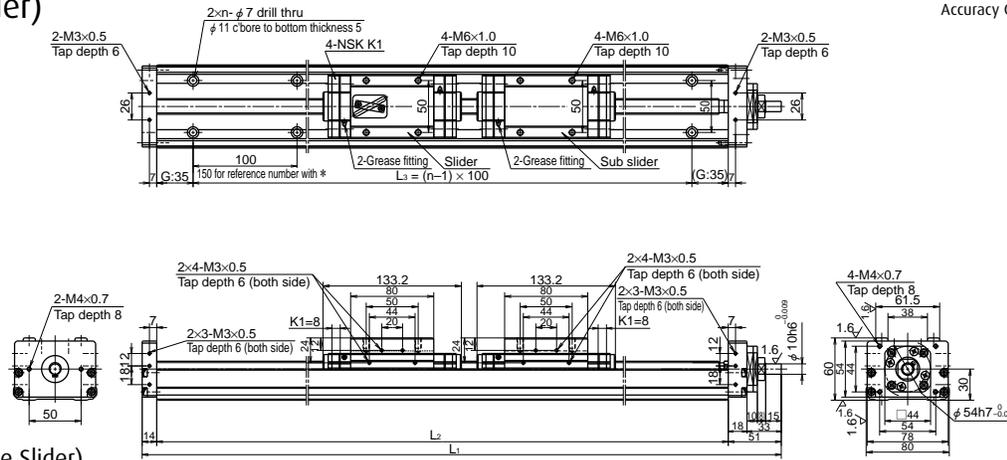

Dimension of MCM08 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCM08008H10D00	80	103 (135)	10	435	370	300	3	0.169	6.5
MCM08018H10D00	180	203 (235)	10	535	470	400	5	0.199	7.5
MCM08018H20D00			20						
MCM08028H10D00	280	303 (335)	10	635	570	500	6	0.228	8.4
MCM08028H20D00			20						
MCM08038H10D00	380	403 (435)	10	735	670	600	7	0.257	9.4
MCM08038H20D00			20						
MCM08048H10D00	480	503 (535)	10	835	770	700	8	0.287	10.3
MCM08048H20D00			20						
MCM08058H10D00	580	603 (635)	10	935	870	800	9	0.316	11.5
MCM08058H20D00			20						
MCM08068H10D00	680	703 (735)	10	1,035	970	900	10	0.346	12.2
MCM08068H20D00			20						

Bolthole pitch L₃ on item marked with * is 150mm.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	10	2.5 - 10.8
20	4.0 - 17.2	

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


l Lead (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
10	Ø15	7,070	24,400	7100	10	12,800		
20		4,560	19,400		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{RO}	Pitching M _{PO}	Yawing M _{YO}
Double	1,540	2,050	2,050

MCM10

Accuracy Grade: High Grade (H)

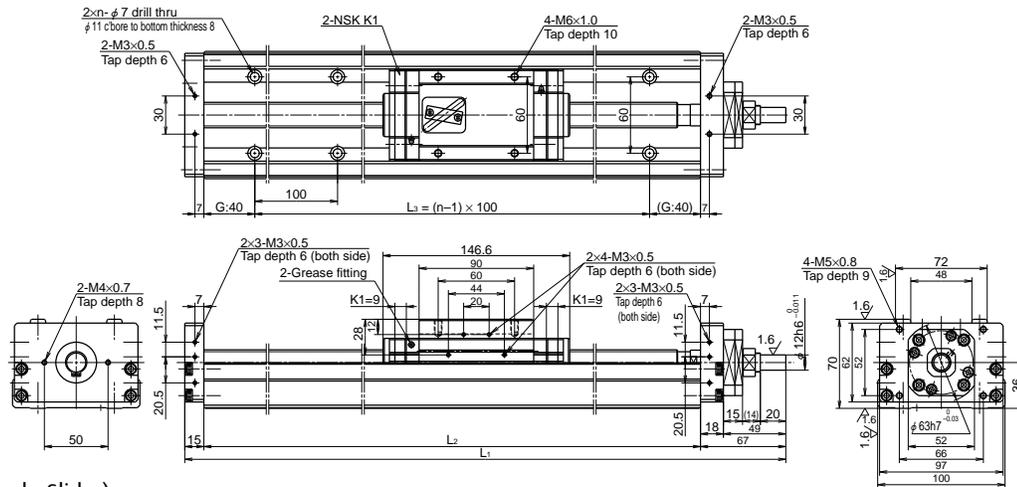

Dimension of MCM10 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes	Inertia × 10 ⁻⁴ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCM10010H10K00	100	133 (151)	10	362	280	200	2*	0.332	7.8
MCM10010H20K00			20						
*MCM10015H10K00	150	183 (201)	10	412	330	300	4	0.378	8.7
*MCM10015H20K00			20						
MCM10020H10K00	200	233 (251)	10	462	380	300	4	0.425	9.5
MCM10020H20K00			20						
*MCM10025H10K00	250	283 (301)	10	512	430	400	5	0.472	10.4
*MCM10025H20K00			20						
MCM10030H10K00	300	333 (351)	10	562	480	400	5	0.519	11.2
MCM10030H20K00			20						
MCM10040H10K00	400	433 (451)	10	662	580	500	6	0.612	13.0
MCM10040H20K00			20						
MCM10050H10K00	500	533 (551)	10	762	680	600	7	0.706	14.6
MCM10050H20K00			20						
MCM10050H30K00			30					1.010	

Note: 1) Dimension G is 15 for items marked with *.
2) *: Use mounting holes on each end of the rail.

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	10	2.7 - 10.8
20	3.1 - 12.7	
30	5.1 - 18.0	

- Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
- Grease is packed into the ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead	Shaft dia	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _a (km)	Ball screw C _{0a}	Linear guides C ₀	
10	Ø20	11,000	33,500	7,600	10	21,100	29,400	3,380
20		7,060	26,600		20	12,700		
30		11,700	23,200		30	22,700		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	1,170	425	425

MCM10 (Double Slider)

Accuracy Grade: High Grade (H)

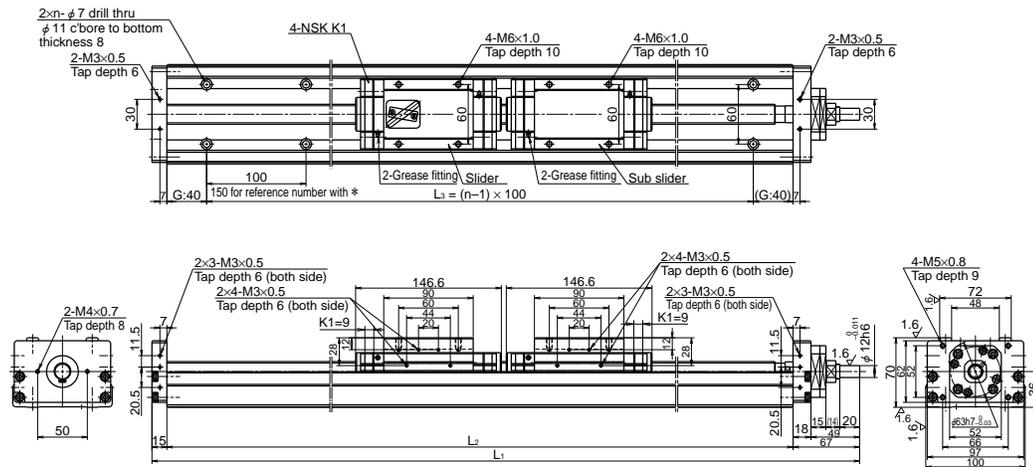

Dimension of MCM10 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes	Inertia $\times 10^{-4}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
● MCM10007H10D00	70	86 (122)	10	462	380	300	3	0.463	11.0
MCM10017H10D00	170	186 (222)	10	562	480	400	5	0.557	12.7
MCM10017H20D00	170	186 (222)	20	562	480	400	5	0.785	12.7
MCM10027H10D00	270	286 (322)	10	662	580	500	6	0.650	13.4
MCM10027H20D00	270	286 (322)	20	662	580	500	6	0.878	13.4
MCM10037H10D00	370	386 (422)	10	762	680	600	7	0.744	15.1
MCM10037H20D00	370	386 (422)	20	762	680	600	7	0.972	15.1
MCM10047H10D00	470	486 (522)	10	862	780	700	8	0.838	17.8
MCM10047H20D00	470	486 (522)	20	862	780	700	8	1.066	17.8
MCM10057H10D00	570	586 (622)	10	962	880	800	9	0.931	19.5
MCM10057H20D00	570	586 (622)	20	962	880	800	9	1.159	19.5
MCM10067H10D00	670	686 (722)	10	1,062	980	900	10	1.025	21.2
MCM10067H20D00	670	686 (722)	20	1,062	980	900	10	1.253	21.2
*MCM10087H10D00	870	886 (922)	10	1,262	1,180	1,000	11	1.212	23.6
*MCM10087H20D00	870	886 (922)	20	1,262	1,180	1,000	11	1.440	23.6

Dimension G is 90 for those marked with *.
Dimension (1) is 150mm for those marked with ●.

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	10	4.2 - 15.6
	20	5.0 - 19.6

1. Frictional resistance of NSK K1™ Lubrication Unit is included in the dynamic torque in the table.
2. Grease is packed into the ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Rated running distance L _s (km)	Ball screw C _{0s}	Linear guides C ₀	
10	Ø20	11,000	33,500	7,600	10	21,100	29,400	3,380
20		7,060	26,600		20	12,700		


Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Double	2,340	2,940	2,940

2.3 MCM Series Optional Accessories

2.3.1 Sensor Unit

Proximity Switch

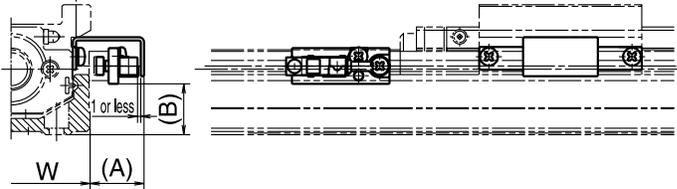


(Example of assembly)

Type	Reference Number			Dimension (A) (mm)	Dimension (B) (mm)	Body width W (mm)
MCM02	MC-SR02-00	MC-SR02-01	MC-SR02-02	17	2	28
MCM03	MC-SR03-10	MC-SR03-11	MC-SR03-12	17	3	34
MCM05	MC-SR05-10	MC-SR05-11	MC-SR05-12	17	15	48.6
MCM06	MC-SR06-10	MC-SR06-11	MC-SR06-12	17	19	58
MCM08	MC-SR08-10	MC-SR08-11	MC-SR08-12	16	27	80
MCM10	MC-SR10-10	MC-SR10-11	MC-SR10-12	16	35	100
Quantity	Proximity switch (normally open)	—	3	1	E2S-W13 (OMRON Corp.)	
	Proximity switch (normally close)	3	—	2	E2S-W14 (OMRON Corp.)	

A spacer plate is required when you use a cover unit or sensor unit for an MCM03 with a lead of 1 or 2 mm.

A sensor unit consists of sensors and sensor mounting parts.

Photo Sensor

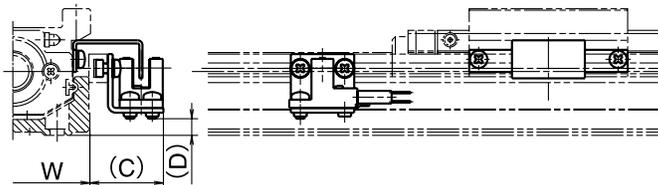

(Example of assembly)


Type	NPN Sensor* Reference Number	PNP Sensor** Reference Number	Dimension (C) (mm)	Dimension (D) (mm)	Body width W (mm)	Remarks
MCM03	MC-SR03-13	MC-SR03-40	24	0.5	34.0	* OMRON EE-SX674
MCM05	MC-SR05-13	MC-SR05-62	24	5.0	48.6	** OMRON EE-SX674P
MCM06	MC-SR06-13	MC-SR06-46	24	9.0	58.0	EE-1001 Connector
MCM08	MC-SR08-13	MC-SR08-56	23	17.0	80.0	3 Sensors & 3 Connectors
MCM10	MC-SR10-13	MC-SR10-45	22	24.0	100.0	per Ref No.

A spacer plate is required when you use a cover unit or sensor unit for an MCM03 with a lead of 1 or 2 mm.


A sensor unit consists of sensors and sensor mounting parts.

Sensor Rail

Sensor Rail for MCM03: MC-SRL3- * * * *

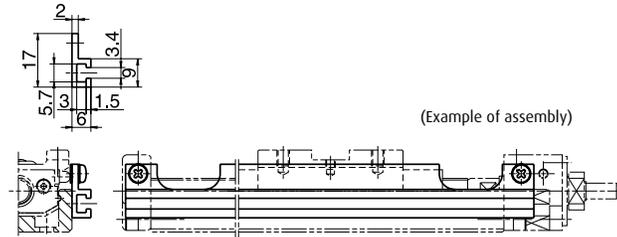

Sensor Rail for MCM05: MC-SRL5- * * * *

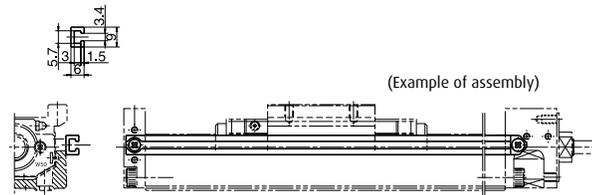


Sensor Rail for MCM02: MC-SRL2- * * * *

Sensor Rail for MCM06: MC-SRL6- * * * *

Sensor Rail for MCM08: MC-SRL8- * * * *

Sensor Rail for MCM10: MC-SRL1- * * * *

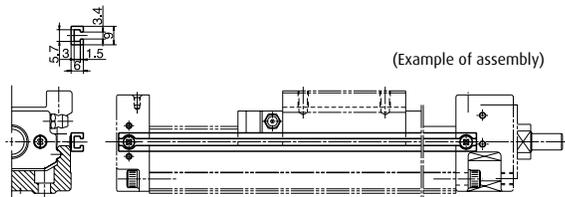

* * * * is the same as rail dimension L:
Please install washer between sensor rail and support blocks for MCM03, MCM05, MCM06 and MCM08.

MCM Series and Sensor Rail Combination Table

Model No.	Body length L: (mm)	Reference No.	Sensor rail reference No.
MCM02	100	MCM02005H01K MCM02005P01K MCM02005H02K MCM02005P02K	MC-SRL2-0100*
	150	MCM02010H01K MCM02010P01K MCM02010H02K MCM02010P02K	MC-SRL2-0150
	200	MCM02015H01K MCM02015P01K MCM02015H02K MCM02015P02K	MC-SRL2-0200
MCM03	115	MCM03005P01K00 MCM03005P02K00	MC-SRL3-0115
	140	MCM03005H05K00 MCM03005H10K00 MCM03005H12K00 MCM03005H15K00	MC-SRL3-0140
	190	MCM03010P01K00 MCM03010P02K00 MCM03010H05K00 MCM03010H10K00 MCM03010H12K00 MCM03010H15K00	MC-SRL3-0190
	240	MCM03015P01K00 MCM03015P02K00 MCM03015H05K00 MCM03015H10K00 MCM03015H12K00 MCM03015H15K00	MC-SRL3-0240
	290	MCM03020H05K00 MCM03020H10K00 MCM03020H12K00 MCM03020H15K00	MC-SRL3-0290
	340	MCM03025H05K00 MCM03025H10K00 MCM03025H12K00 MCM03025H15K00	MC-SRL3-0340
MCM05	180	MCM05005H05K00 MCM05005H10K00 MCM05005H20K00	MC-SRL5-0180
	230	MCM05010H05K00 MCM05010H10K00 MCM05010H20K00	MC-SRL5-0230
	280	MCM05015H05K00 MCM05015H10K00 MCM05015H20K00 MCM05006H10D00	MC-SRL5-0280
	330	MCM05020H05K00 MCM05020H10K00 MCM05020H20K00 MCM05011H10D00	MC-SRL5-0330
	380	MCM05025H05K00 MCM05025H10K00 MCM05025H20K00 MCM05016H10D00	MC-SRL5-0380
	430	MCM05030H05K00 MCM05030H10K00 MCM05030H20K00 MCM05030H30K00 MCM05021H10D00 MCM05021H20D00	MC-SRL5-0430
	530	MCM05040H05K00 MCM05040H10K00 MCM05040H20K00 MCM05040H30K00 MCM05031H10D00 MCM05031H20D00	MC-SRL5-0530

Model No.	Body length L: (mm)	Reference No.	Sensor rail reference No.
MCM05	630	MCM05050H05K00 MCM05050H10K00 MCM05050H20K00 MCM05050H30K00 MCM05041H10D00 MCM05041H20D00	MC-SRL5-0630
	730	MCM05060H05K00 MCM05060H10K00 MCM05060H20K00 MCM05060H30K00 MCM05051H10D00 MCM05051H20D00	MC-SRL5-0730
	190	MCM06005H05K02 MCM06005H10K00 MCM06005H20K00	MC-SRL6-0190
MCM06	240	MCM06010H05K02 MCM06010H10K00 MCM06010H20K00	MC-SRL6-0240
	290	MCM06015H05K02 MCM06015H10K00 MCM06015H20K00	MC-SRL6-0290
	340	MCM06020H05K02 MCM06020H10K00 MCM06020H20K00 MCM06011H05D02 MCM06011H10D00	MC-SRL6-0340
	390	MCM06025H05K02 MCM06025H10K00 MCM06025H20K00	MC-SRL6-0390
	440	MCM06030H05K02 MCM06030H10K00 MCM06030H20K00 MCM06021H05D02 MCM06021H10D00 MCM06021H20D00	MC-SRL6-0440
	540	MCM06040H05K02 MCM06040H10K00 MCM06040H20K00 MCM06031H05D02 MCM06031H10D00 MCM06031H20D00	MC-SRL6-0540
	640	MCM06050H05K02 MCM06050H10K00 MCM06050H20K00 MCM06041H05D02 MCM06041H10D00 MCM06041H20D00	MC-SRL6-0640
	740	MCM06060H05K02 MCM06060H10K00 MCM06060H20K00 MCM06051H10D00 MCM06051H20D00	MC-SRL6-0740
	840	MCM06070H05K02 MCM06070H10K00 MCM06070H20K00 MCM06061H10D00 MCM06061H20D00	MC-SRL6-0840
	940	MCM06080H05K02 MCM06080H10K00 MCM06080H20K00 MCM06071H10D00 MCM06071H20D00	MC-SRL6-0940

*) When using NSK standard sensors, prepare two sensor rails. Two sensor rails will also be required for other Monocarriers depending on signal points of sensors. Contact NSK for details.

MCM Series


Lightweight Type

Model No.	Body length L (mm)	Reference No.	Sensor rail reference No.
MCM08	220	MCM08005H05K02	MC-SRL8-0220
		MCM08005H10K00	
	270	MCM08010H05K02	MC-SRL8-0270
		MCM08010H10K00	
	320	MCM08010H20K00	MC-SRL8-0320
		MCM08015H05K02	
	370	MCM08015H10K00	MC-SRL8-0370
		MCM08015H20K00	
	420	MCM08020H05K02	MC-SRL8-0420
		MCM08020H10K00	
	470	MCM08020H20K00	MC-SRL8-0470
		MCM08008H10D00	
	570	MCM08025H05K02	MC-SRL8-0570
		MCM08025H10K00	
	670	MCM08030H05K02	MC-SRL8-0670
		MCM08030H10K00	
	770	MCM08030H20K00	MC-SRL8-0770
		MCM08018H10D00	
	870	MCM08018H20D00	MC-SRL8-0870
		MCM08040H05K02	
	970	MCM08040H10K00	MC-SRL8-0970
		MCM08040H20K00	
		MCM08040H30K00	
		MCM08028H10D00	
	MCM08028H20D00		
	MCM08050H05K02		
	MCM08050H10K00		
	MCM08050H20K00		
	MCM08050H30K00		
	MCM08038H10D00		
	MCM08038H20D00		
	MCM08060H05K02		
	MCM08060H10K00		
	MCM08060H20K00		
	MCM08060H30K00		
	MCM08048H10D00		
	MCM08048H20D00		
	MCM08070H05K02		
	MCM08070H10K00		
	MCM08070H20K00		
	MCM08070H30K00		
	MCM08058H10D00		
	MCM08058H20D00		
	MCM08080H05K02		
	MCM08080H10K00		
	MCM08080H20K00		
	MCM08080H30K00		
	MCM08068H10D00		
	MCM08068H20D00		

Model No.	Body length L ₂ (mm)	Reference No.	Sensor rail reference No.
MCM10	280	MCM10010H10K00	MC-SRL1-0280
		MCM10010H20K00	
	330	MCM10015H10K00	MC-SRL1-0330
		MCM10015H20K00	
	380	MCM10020H10K00	MC-SRL1-0380
		MCM10020H20K00	
	430	MCM10007H10D00	MC-SRL1-0430
		MCM10025H10K00	
	480	MCM10025H20K00	MC-SRL1-0480
		MCM10030H10K00	
	580	MCM10030H20K00	MC-SRL1-0580
		MCM10017H10D00	
	680	MCM10017H20D00	MC-SRL1-0680
		MCM10040H10K00	
	780	MCM10040H20K00	MC-SRL1-0780
		MCM10027H10D00	
	880	MCM10027H20D00	MC-SRL1-0880
		MCM10050H10K00	
	980	MCM10050H20K00	MC-SRL1-0980
		MCM10050H30K00	
	1,080	MCM10037H10D00	MC-SRL1-1080
		MCM10037H20D00	
	1,180	MCM10060H10K00	MC-SRL1-1180
		MCM10060H20K00	
	MCM10060H30K00		
	MCM10047H10D00		
	MCM10047H20D00		
	MCM10070H10K00		
	MCM10070H20K00		
	MCM10070H30K00		
	MCM10057H10D00		
	MCM10057H20D00		
	MCM10080H10K00		
	MCM10080H20K00		
	MCM10080H30K00		
	MCM10067H10D00		
	MCM10067H20D00		
	MCM10090H10K00		
	MCM10090H20K00		
	MCM10100H10K00		
	MCM10100H20K00		
	MCM10087H10D00		
	MCM10087H20D00		

2.3.2 Cover Unit

Cover Unit for MCM02

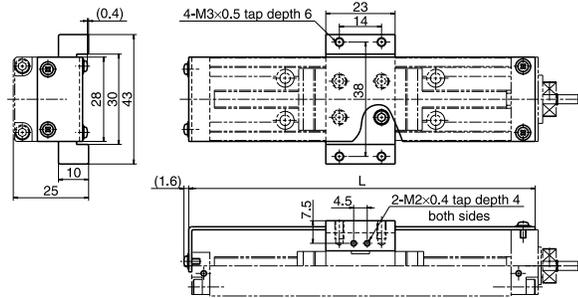


(Unit: mm)

Stroke	Reference Number	Length (L)
50	MC-CV02005-00	115
100	MC-CV02010-00	165
150	MC-CV02015-00	215

Height of screw head is not included.

Cover Unit for MCM03

- Notes: 1. When the cover is used for leads 1 and 2, an optional spacer plate (nominal No.: MC-SP03-00) is required.
2. When the cover is used for lead 15, an optional spacer plate (nominal No.: MC-SP03-01) is required. A full cover unit cannot be installed for lead 15.

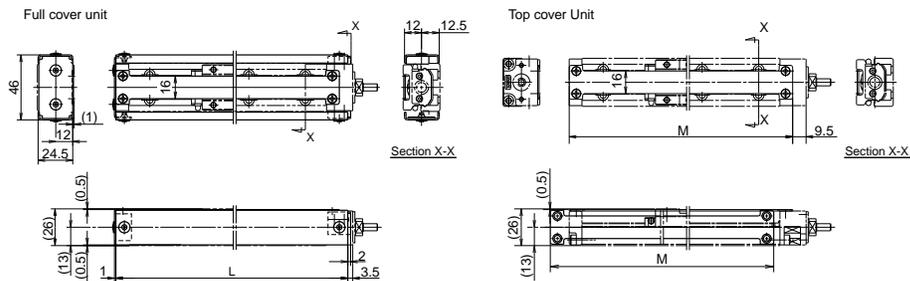


(Unit: mm)

Stroke	Reference No.		Cover length	
	Top cover unit	Full cover unit	Length (L)	Length (M)
50 (lead 1, 2)	MC-CV03005-02	*MC-CV03005-01	139	133
50 (lead 5, 10, 12, 15)	MC-CV03005-02A	*MC-CV03005-01A	164	158
100	MC-CV03010-02	*MC-CV03010-01	214	208
150	MC-CV03015-02	*MC-CV03015-01	264	258
200	MC-CV03020-02	*MC-CV03020-01	314	308
250	MC-CV03025-02	*MC-CV03025-01	364	358


*) The full-cover unit cannot be used when the sensor unit is used.
Height of screw head is not included.

Spacer for MCM03 (Optional)

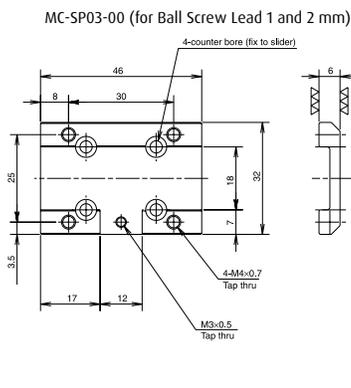


Note: Spacer is required when using sensor unit and cover unit.

MC-SP03-01 (for Ball Screw Lead 15mm)

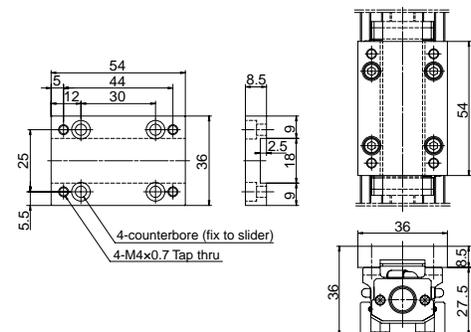

Note: To use an upper surface cover, use it during assembly.

Cover Unit for MCM05, 06, 08 and 10

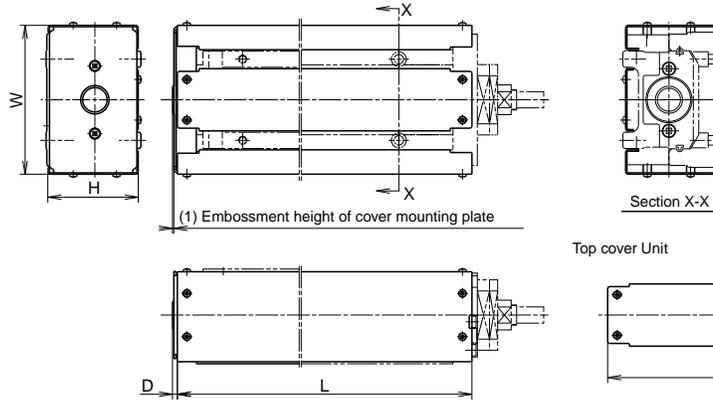

Unit: mm

Model No.	Stroke		Cover Unit Reference No.		Cover length			
	Single slider	Double slider	Top cover Unit	Full cover Unit ¹⁾	Length (L)	Height (H)	Width (W)	End part (D)
MCM05	50	—	MC-CV05005-01	MC-CV05005-00	200	38.5	65	2.6
	100	—	MC-CV05010-01	MC-CV05010-00	250			
	150	60	MC-CV05015-01	MC-CV05015-00	300			
	200	110	MC-CV05020-01	MC-CV05020-00	350			
	250	160	MC-CV05025-01	MC-CV05025-00	400			
	300	210	MC-CV05030-01	MC-CV05030-00	450			
	400	310	MC-CV05040-01	MC-CV05040-00	550			
	500	410	MC-CV05050-01	MC-CV05050-00	650			
MCM06	600	510	MC-CV05060-37	MC-CV05060-35	750	48.5	75	— ^{*2}
	50	—	MC-CV06005-01	MC-CV06005-00	225			
	100	—	MC-CV06010-01	MC-CV06010-00	275			
	150	—	MC-CV06015-01	MC-CV06015-00	325			
	200	110	MC-CV06020-01	MC-CV06020-00	375			
	250	—	MC-CV06025-01	MC-CV06025-00	425			
	300	210	MC-CV06030-01	MC-CV06030-00	475			
	400	310	MC-CV06040-01	MC-CV06040-00	575			
	500	410	MC-CV06050-01	MC-CV06050-00	675			
	600	510	MC-CV06060-01	MC-CV06060-00	775			
MCM08	700	610	MC-CV06070-01	MC-CV06070-00	875	56.5	90	2.6
	800	710	MC-CV06080-36	MC-CV06080-35	975			
	50	—	MC-CV08005-01	MC-CV08005-00	248			
	100	—	MC-CV08010-01	MC-CV08010-00	298			
	150	—	MC-CV08015-01	MC-CV08015-00	348			
	200	80	MC-CV08020-01	MC-CV08020-00	398			
	250	—	MC-CV08025-01	MC-CV08025-00	448			
	300	180	MC-CV08030-01	MC-CV08030-00	498			
MCM10	400	280	MC-CV08040-01	MC-CV08040-00	598	66.5	110	3.6
	500	380	MC-CV08050-01	MC-CV08050-00	698			
	600	480	MC-CV08060-01	MC-CV08060-00	798			
	700	580	MC-CV08070-01	MC-CV08070-00	898			
	800	680	MC-CV08080-01	MC-CV08080-00	998			
	100	—	MC-CV10010-01	MC-CV10010-00	308			
	150	—	MC-CV10015-01	MC-CV10015-00	358			
	200	70	MC-CV10020-01	MC-CV10020-00	408			
250	—	MC-CV10025-01	MC-CV10025-00	458				
MCM10	300	170	MC-CV10030-01	MC-CV10030-00	508	66.5	110	3.6
	400	270	MC-CV10040-01	MC-CV10040-00	608			
	500	370	MC-CV10050-01	MC-CV10050-00	708			
	600	470	MC-CV10060-01	MC-CV10060-00	808			
	700	570	MC-CV10070-01	MC-CV10070-00	908			
	800	670	MC-CV10080-01	MC-CV10080-00	1,008			
	900	—	MC-CV10090-01	MC-CV10090-00	1,108			
	1,000	870	MC-CV10100-36	MC-CV10100-35	1,208			

Note: The dimensions of cover shown above do not include the head height of fixing machine screws. Add the head of machine screws of approximately 2.5 mm to the outer measurement of a cover unit. Set a margin for mechanical interference with surrounding components.

¹⁾ When using sensor unit, full-cover unit cannot be used.


²⁾ A cover mounting plate is not used to MCM06.

2.3.3 Motor Bracket

2.3.3.1 Motor Bracket by NEMA Size

MCM02 (NEMA 17)

Reference Number
MC-BK02-231-31

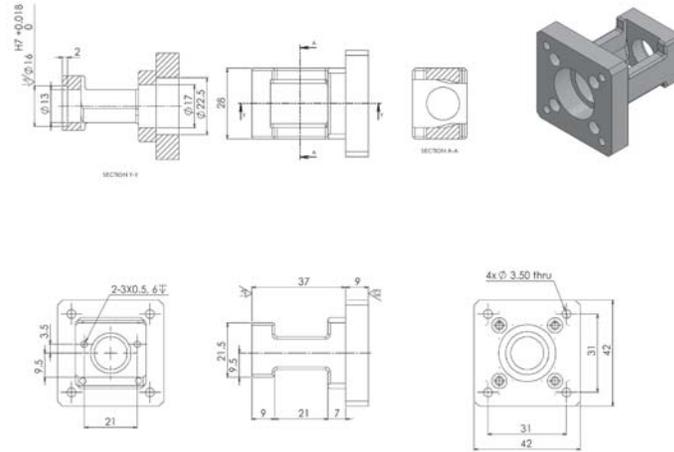

Included:


4 pcs
2 pcs

M3x0.5x12
M3x0.5x10

Socket Head Cap Screws
Socket Head Cap Screws

MCM03 (Blank)

Reference Number
MC-BK03-000-31

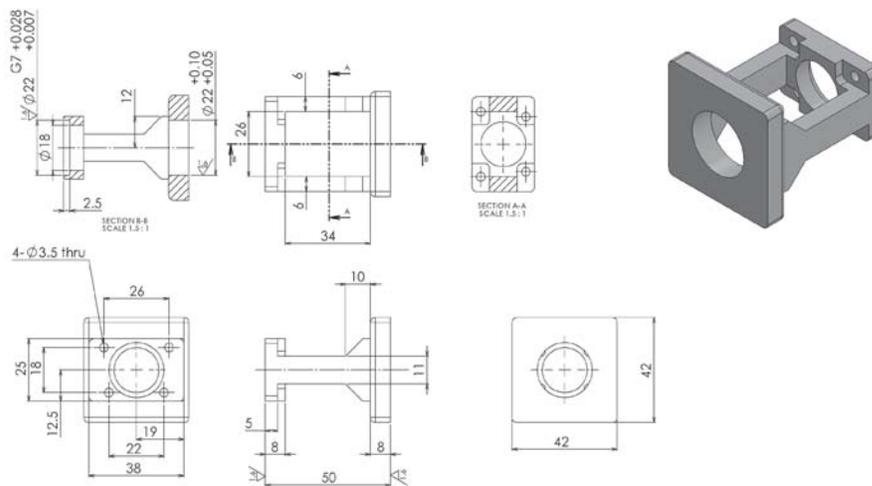

Included:



4 pcs

M3x0.5x10

Socket Head Cap Screws

MCM03 (NEMA 17)



Reference Number
MC-BK03-231-31

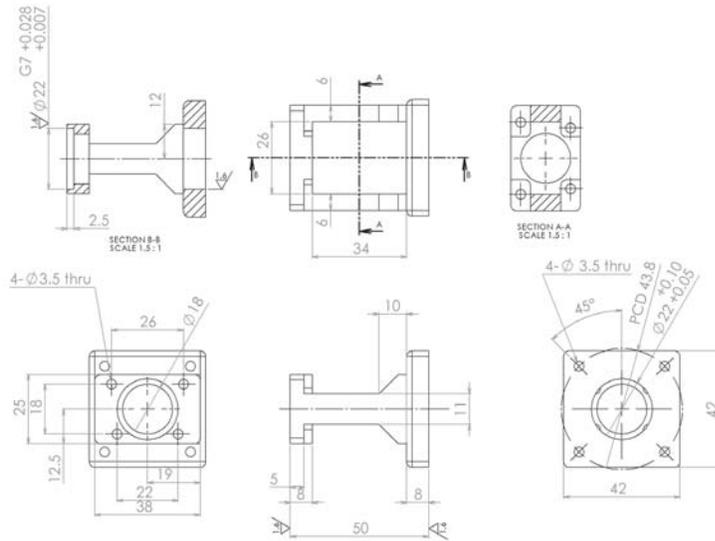

Included:
4 pcs M3x0.5x10 Socket Head Cap Screws

MCM03 (NEMA 23)



Reference Number
MC-BK03-167-32

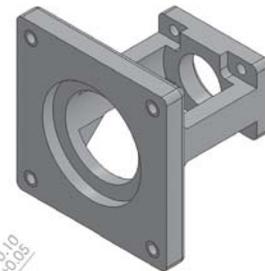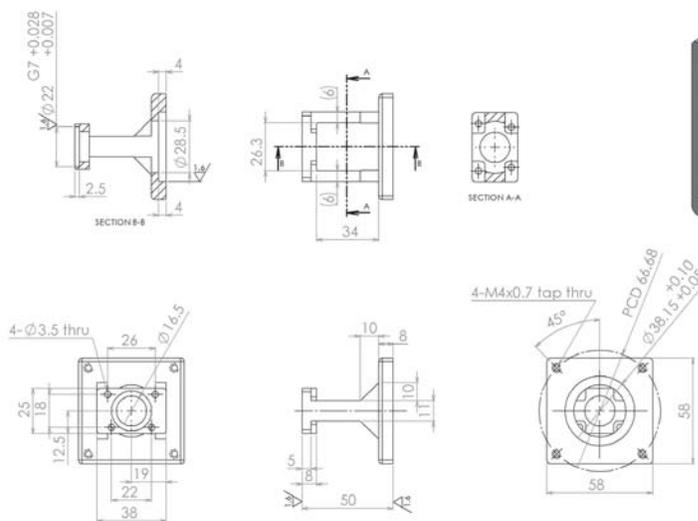

Included:
4 pcs M3x0.5x10 Socket Head Cap Screws
4 pcs M4x0.7x12 Socket Head Cap Screws

MCM05 (Blank)

Reference Number
MC-BK05-000-31

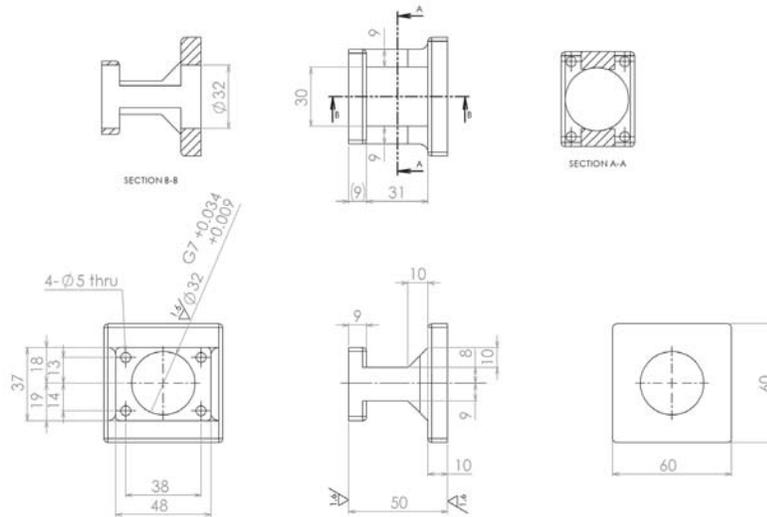

Included:



4 pcs

M4x0.7x15

Socket Head Cap Screws

MCM05 (NEMA 23)

Reference Number
MC-BK05-167-31

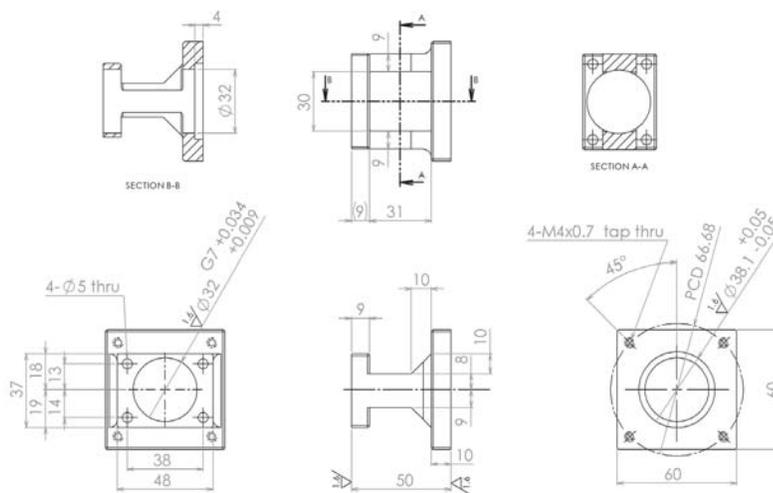

Included:

4 pcs

M4x0.7x14

Socket Head Cap Screws

4 pcs

M4x0.7x15



Socket Head Cap Screws

MCM Series

Lightweight Type

MCM05 (NEMA 34)

Reference Number
MC-BK05-198-31


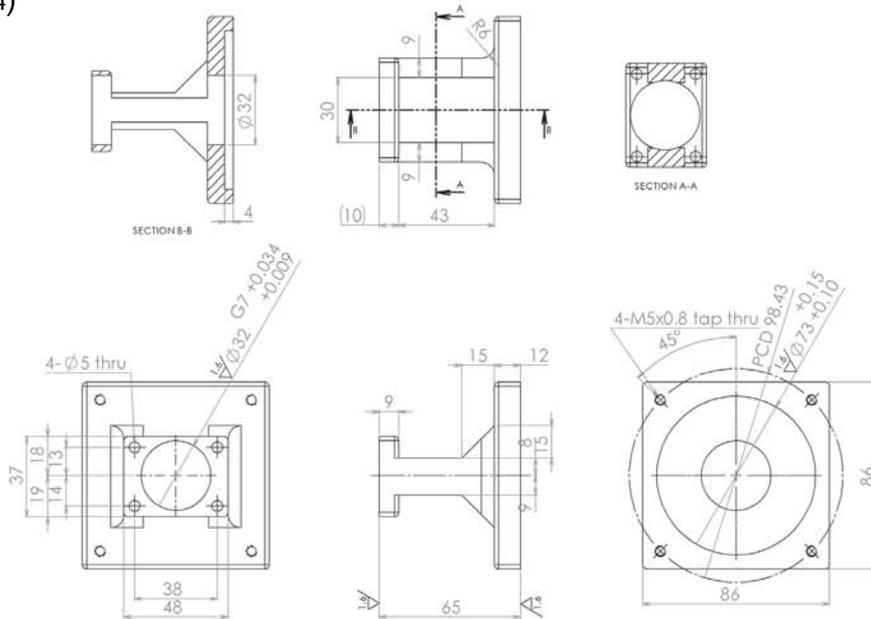


Included:

- | | | |
|-------|-----------|------------------------|
| 4 pcs | M4x0.7x15 | Socket Head Cap Screws |
| 4 pcs | M5x0.8x16 | Socket Head Cap Screws |

MCM06 (NEMA 23)

Reference Number
MC-BK06-167-31


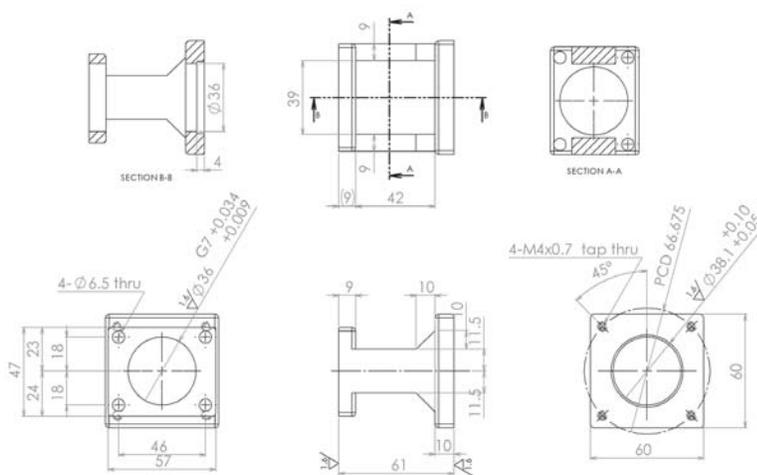


Included:

- | | | |
|-------|-----------|------------------------|
| 4 pcs | M6x1.0x16 | Socket Head Cap Screws |
| 4 pcs | M4x0.7x14 | Socket Head Cap Screws |

MCM08 (NEMA 23)

Reference Number
MC-BK08-167-31


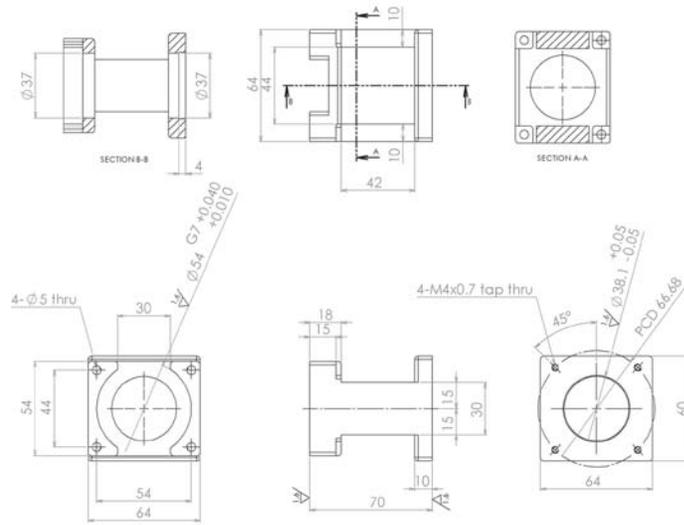


Included:

- | | | |
|-------|-----------|------------------------|
| 4 pcs | M4x0.7x20 | Socket Head Cap Screws |
| 4 pcs | M4x0.7x14 | Socket Head Cap Screws |

MCM08 (Blank)

Reference Number
MC-BK08-000-31

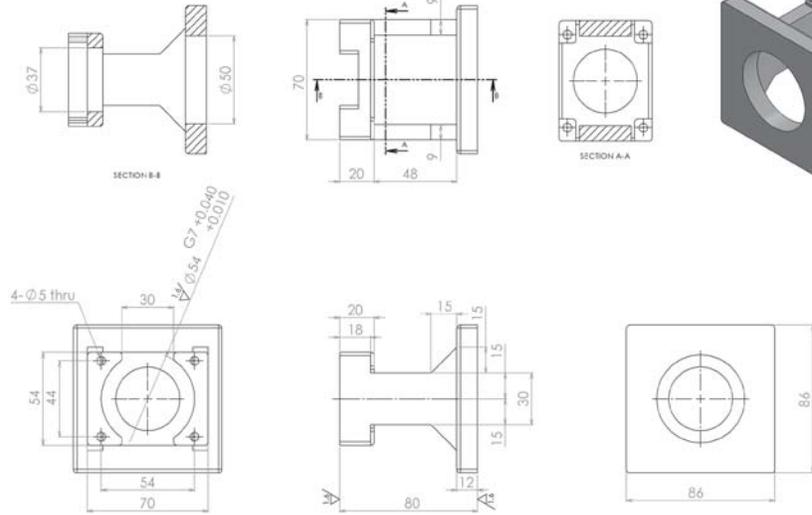

Included:


- | | | |
|-------|-----------|------------------------|
| 4 pcs | M4x0.7x22 | Socket Head Cap Screws |
|-------|-----------|------------------------|

MCM Series

Lightweight Type

MCM08 (NEMA 34)

Reference Number
MC-BK08-198-31

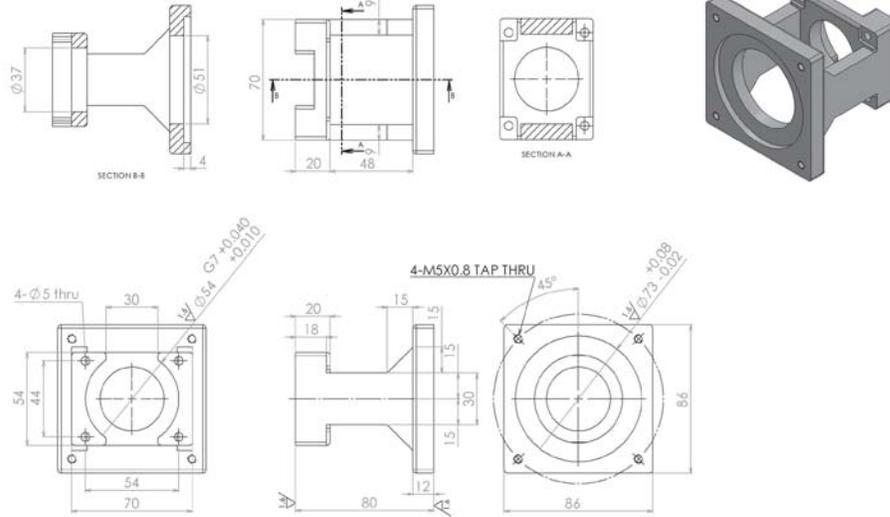

Included:

4 pcs

M4x0.7x22

Socket Head Cap Screws


4 pcs

M5x0.8x16

Socket Head Cap Screws

MCM10 (NEMA 23)

Reference Number
MC-BK10-167-31

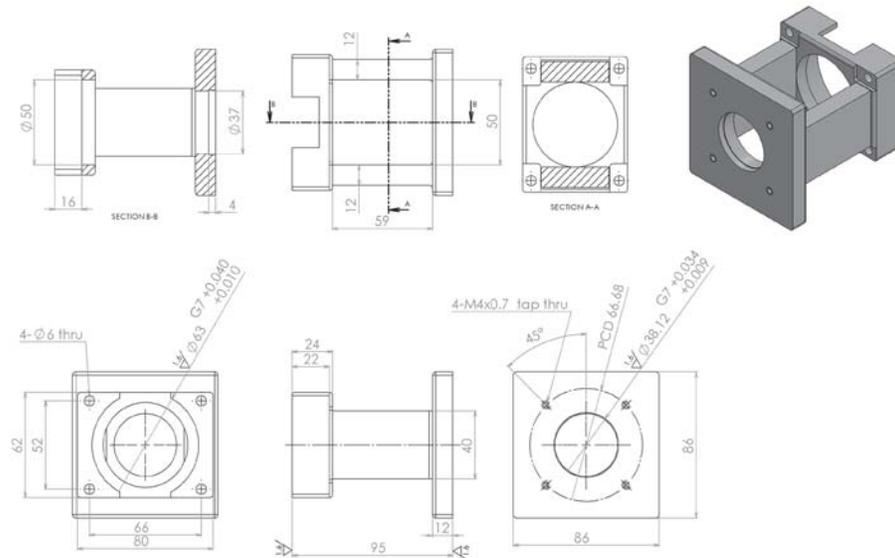

Included:

4 pcs

M5x0.8x30

Socket Head Cap Screws


4 pcs

M4x0.7x22

Socket Head Cap Screws

MCM10 (Blank)

Reference Number
MC-BK10-000-31

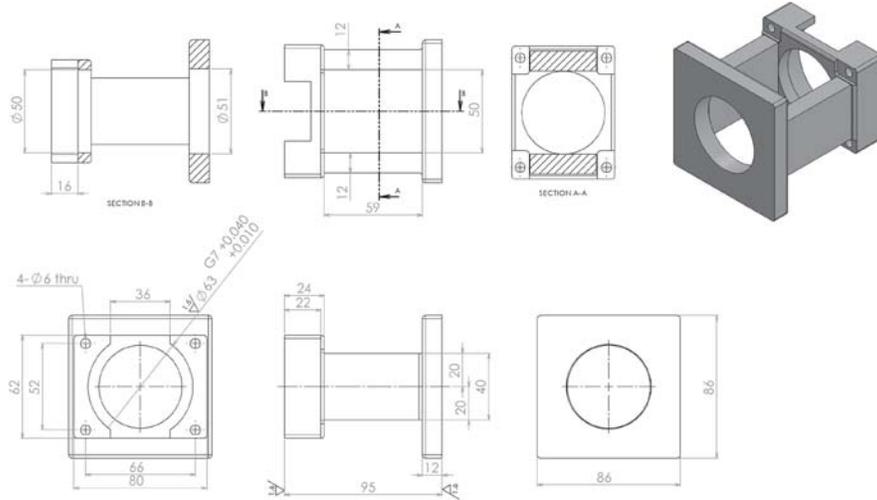

Included:


4 pcs

M5x0.8x30

Socket Head Cap Screws

MCM10 (NEMA 34)

Reference Number
MC-BK10-198-32

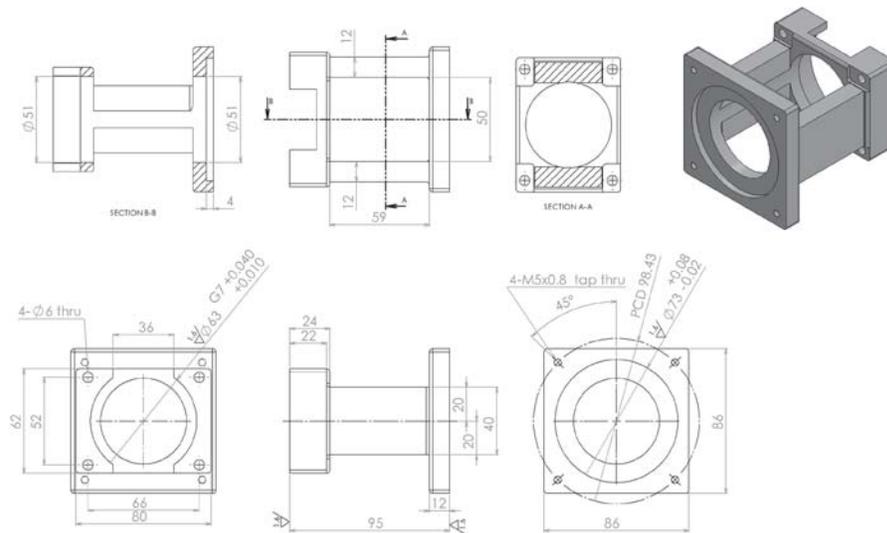

Included:

4 pcs

M5x0.8x30

Socket Head Cap Screws

4 pcs


M5x0.8x16

Socket Head Cap Screws

2.3.3.2 Motor Bracket by Standard Size

MCM02


Reference Number
MC-BK02-128-00

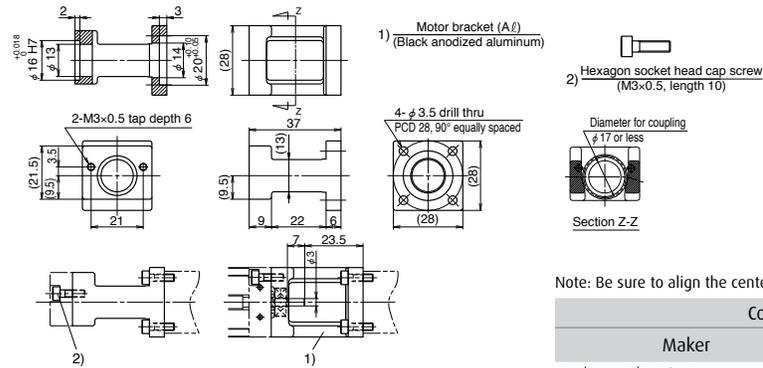

Note: Be sure to align the center lines when installing the motor.

Compatible motor	
Maker	Motor models
Yaskawa Electric Corp. (Σ - mini Series)	SGMM-A1(10W) SGMM-A2(20W)


Reference Number
MC-BK02-133-00

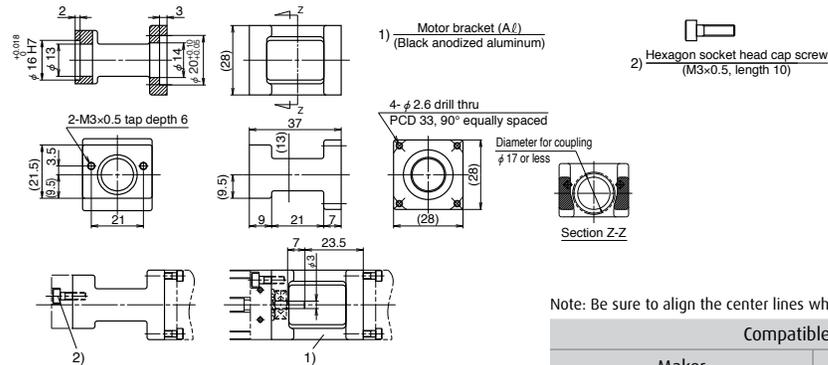

Note: Be sure to align the center lines when installing the motor.

Compatible motor	
Maker	Motor models
Mitsubishi Electric Corp. (Melservo series)	HC-AQ013(10W) HC-AQ023(20W)

Reference Number
MC-BK02-223-00

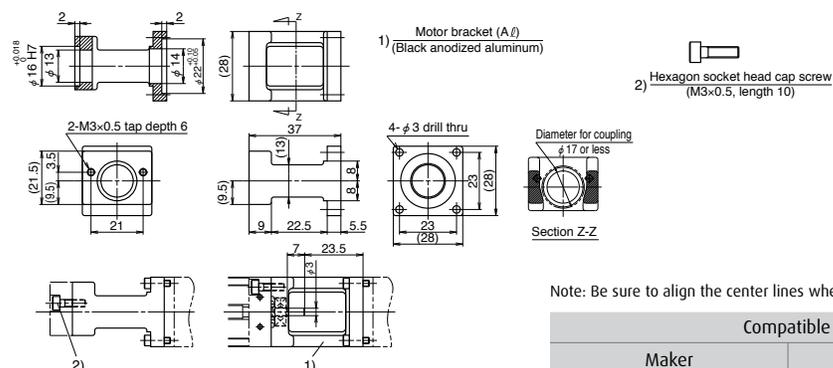


Note: Be sure to align the center lines when installing the motor.

Compatible motor	
Maker	Motor models
Oriental Motor Co., Ltd.	PMU33/35 (5-phase stepping motor) PMC33/35 (5-phase stepping motor)

MCM03

Reference Number
MC-BK03-146-00

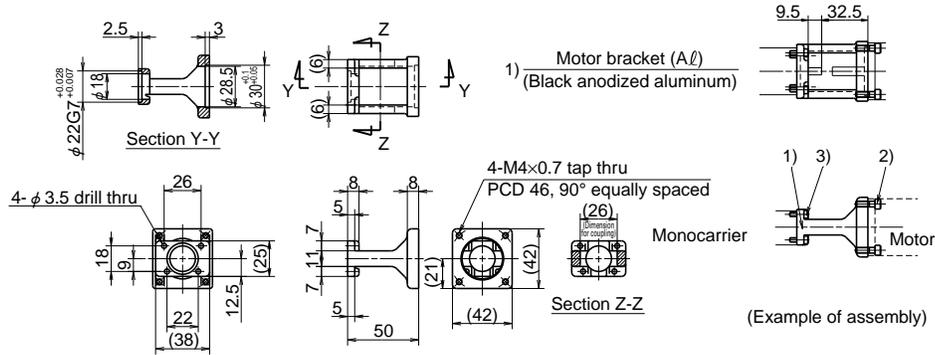


- 2)  Hexagon socket head cap screw (M4, length 12)
- 3)  Hexagon socket head cap screw (M3, length 10)

- Notes:
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMJV-01A(100W), SGMV-01A(100W), SGMV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
Sanyo Denki Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

MCM03

Reference Number
MC-BK03-148-01

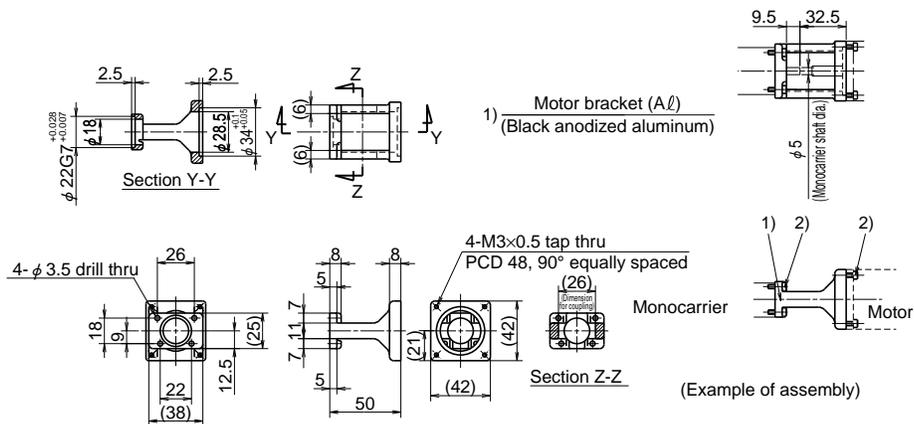


- 2)  Hexagon socket head cap screw (M3, length 10)

- Notes:
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	P50B04006(60W), P50B04010(100W)

MCM03

Reference Number
MC-BK03-231-00

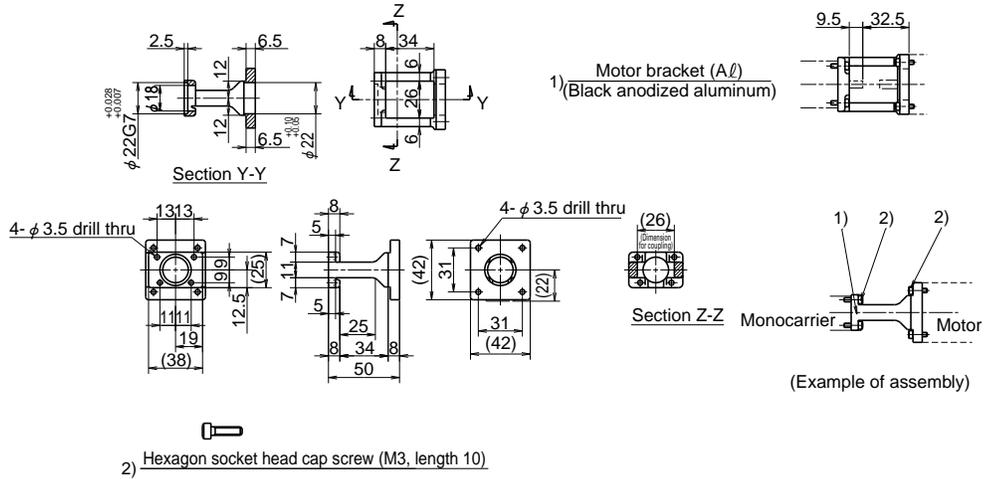


Note: Be sure to align the center lines when installing the motor.
Check the orientation of the bracket.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM423xxx, 103F55xx
Oriental Motor Co., Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x

MCM05

Reference Number
MC-BK05-145-00

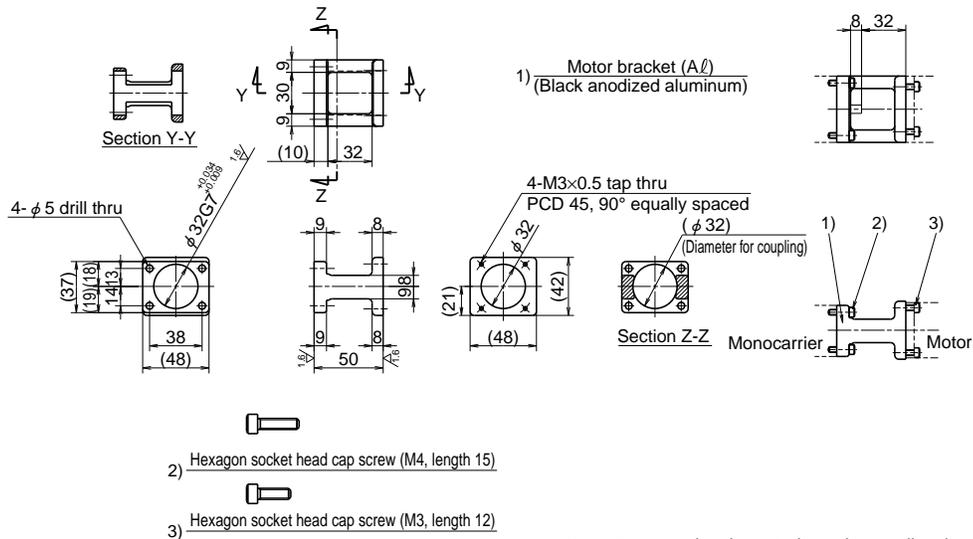


Note: Be sure to align the center lines when installing the motor.
Check the orientation of the bracket.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)

MCM05


Reference Number
MC-BK05-160-00

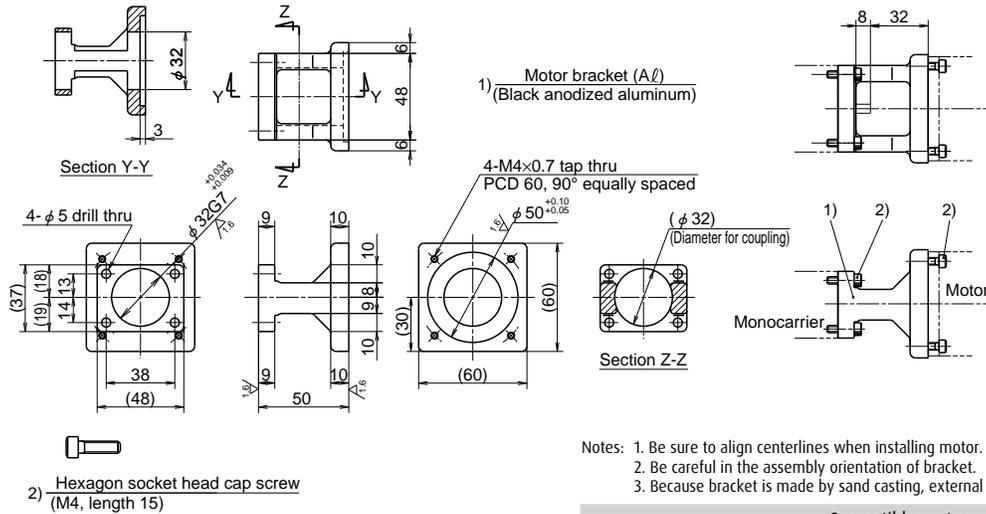

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

MCM05


Reference Number
MC-BK05-250-00

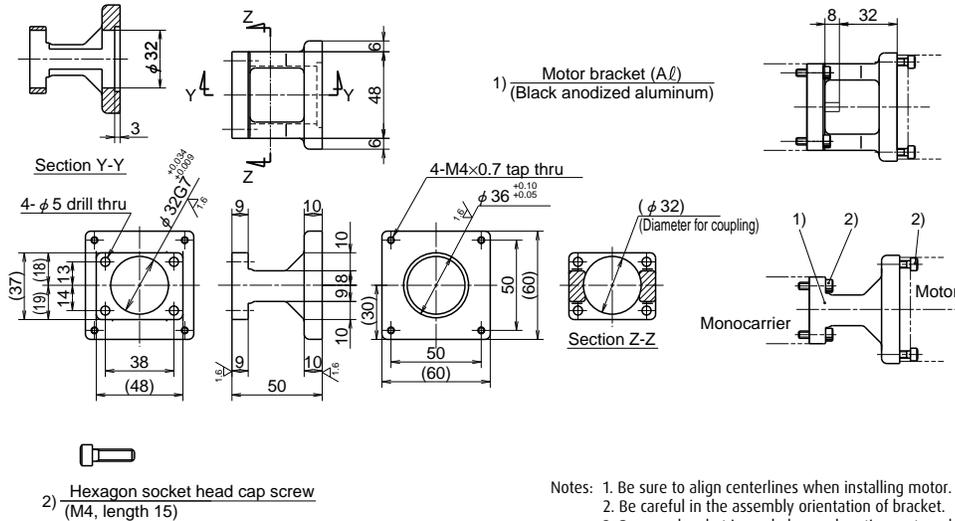

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
Oriental Motor Co., Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x

MCM06

Reference Number
MC-BK06-148-00

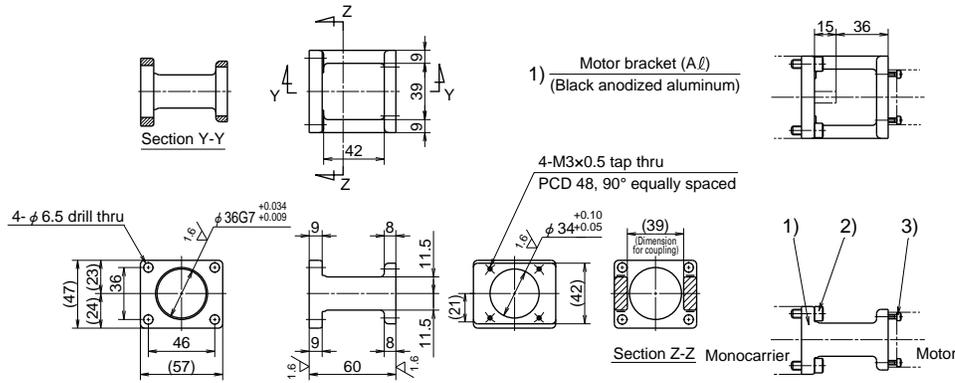


- 1) Motor bracket (A/L)
(Black anodized aluminum)
- 2) Hexagon socket head cap screw (M6, length 16)
- 3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MAMA01(100W)
Sanyo Denki Co., Ltd.	P50B04006(60W), P50B04010(100W)

MCM06

Reference Number
MC-BK06-160-00

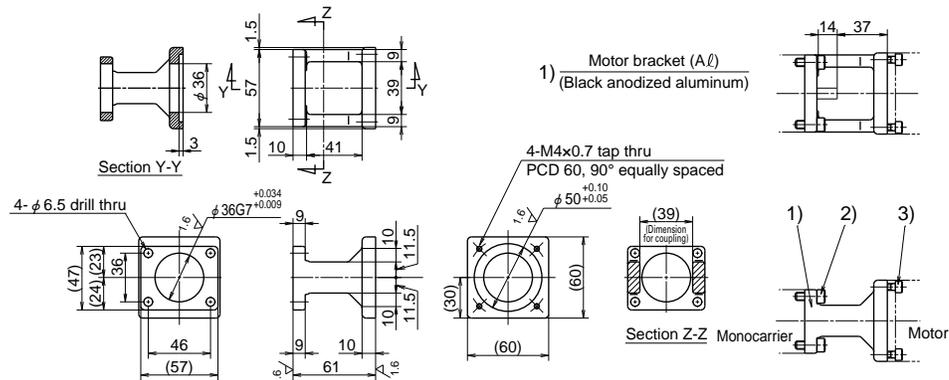


- 1) Motor bracket (A/L)
(Black anodized aluminum)
- 2) Hexagon socket head cap screw (M6, length 16)
- 3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

MCM06

Reference Number
MC-BK06-170-00

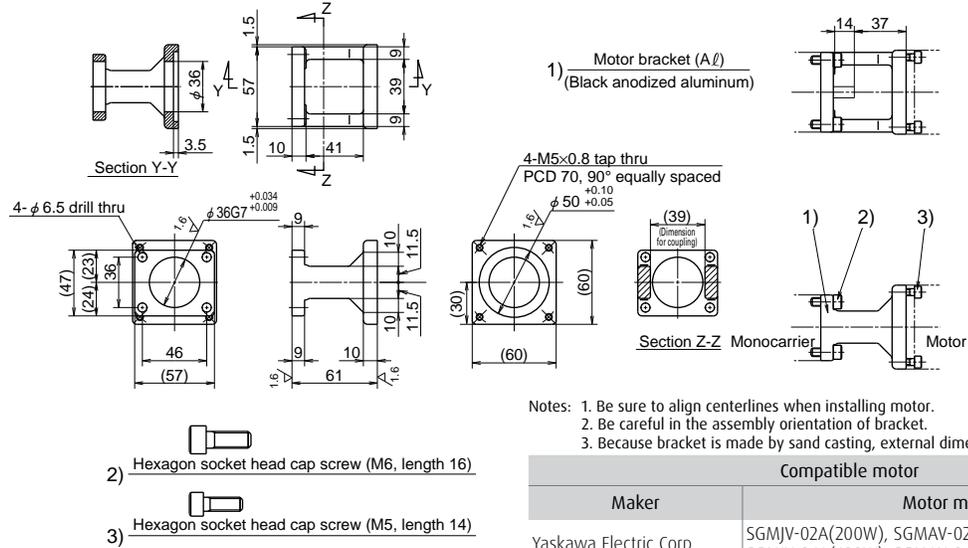


- Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
Sanyo Denki Co., Ltd.	P30B06020(200W), P30B06040(400W)

MCM06

Reference Number
MC-BK06-170-01

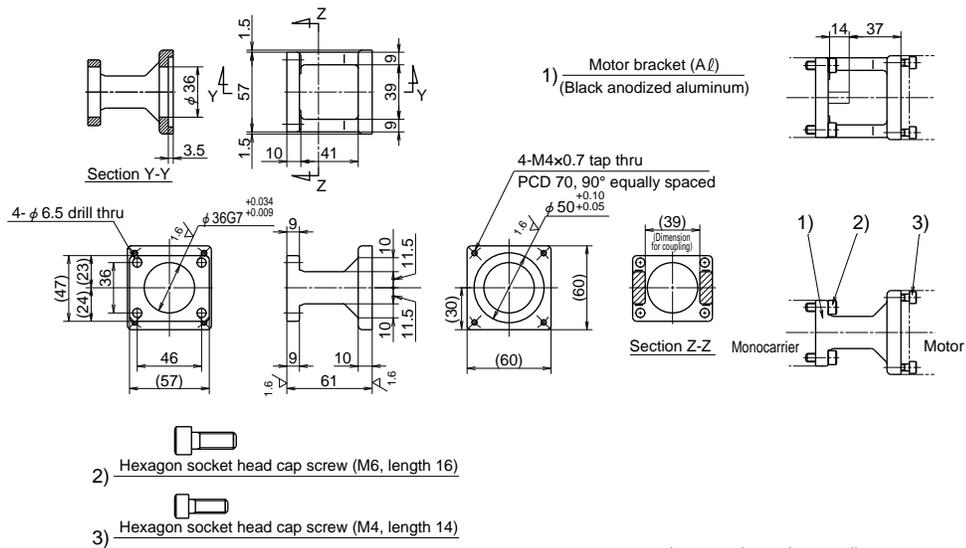


- Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

MCM06


Reference Number
MC-BK06-250-00

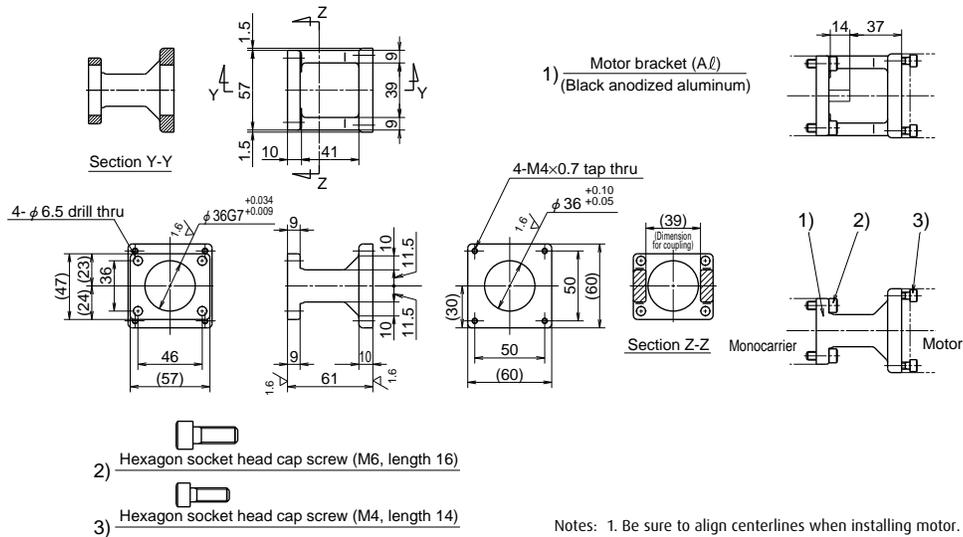

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
Oriental Motor Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x, CFK56x, UMK56x, UFK56x

MCM08


Reference Number
MC-BK08-145-00

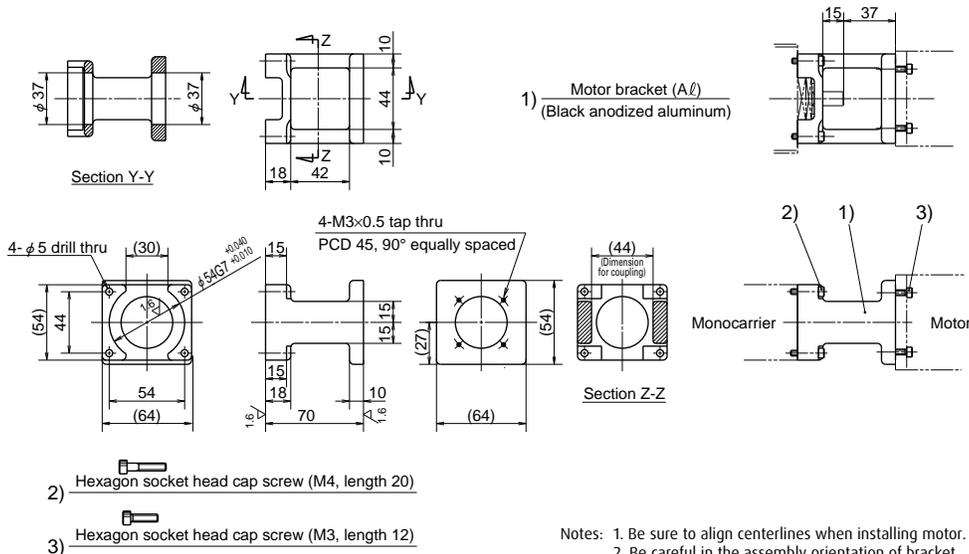


Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD01(100W)

MCM08

Reference Number
MC-BK08-146-00

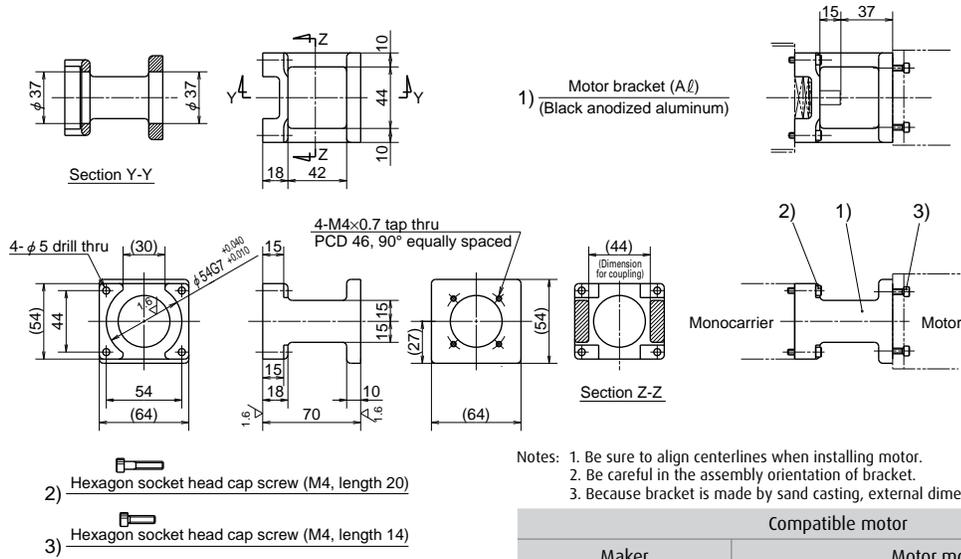


1) Motor bracket (A/L)
(Black anodized aluminum)

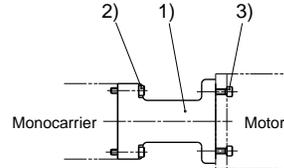


Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMJV-01A(100W), SGMJV-01A(100W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
Sanyo Denki Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W)

MCM08

Reference Number
MC-BK08-160-00

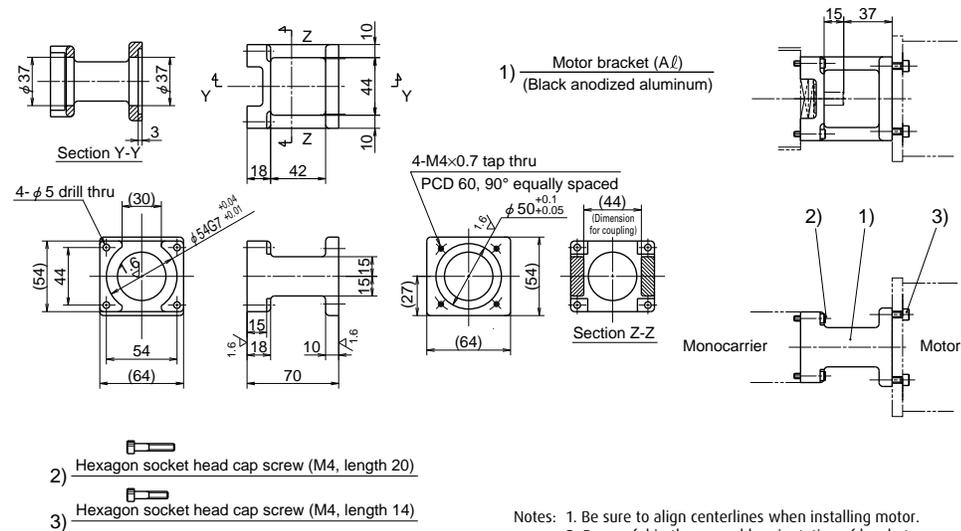


1) Motor bracket (A/L)
(Black anodized aluminum)

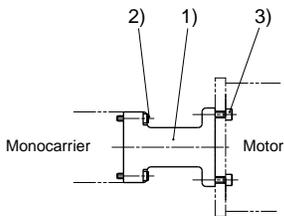

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

MCM08

Reference Number
MC-BK08-170-00

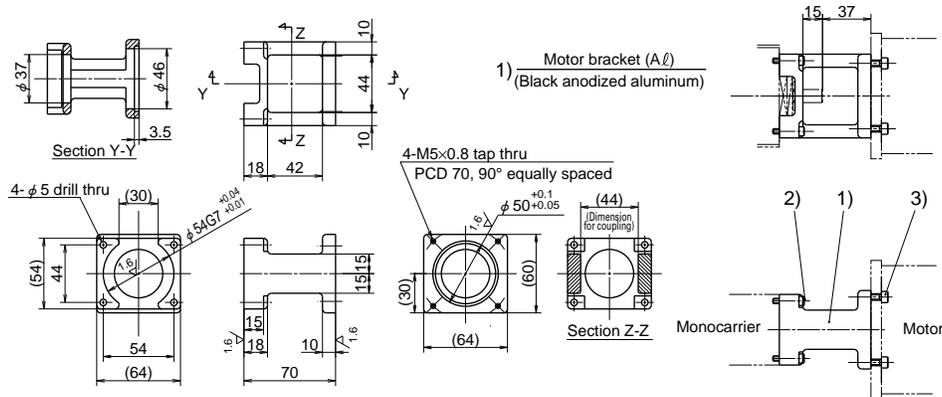


- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M5, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
Sanyo Denki Co., Ltd.	P30B06020(200W), P30B06040(400W)

MCM08

Reference Number
MC-BK08-170-01

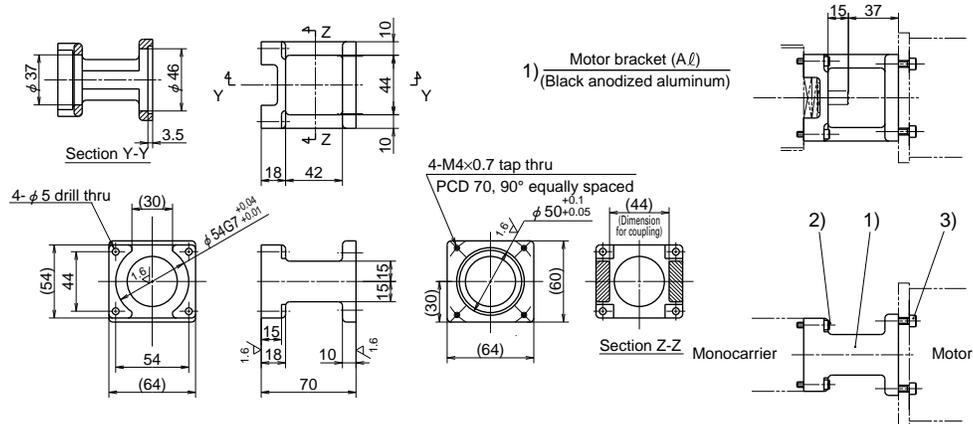


- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

MCM08

Reference Number
MC-BK08-250-00

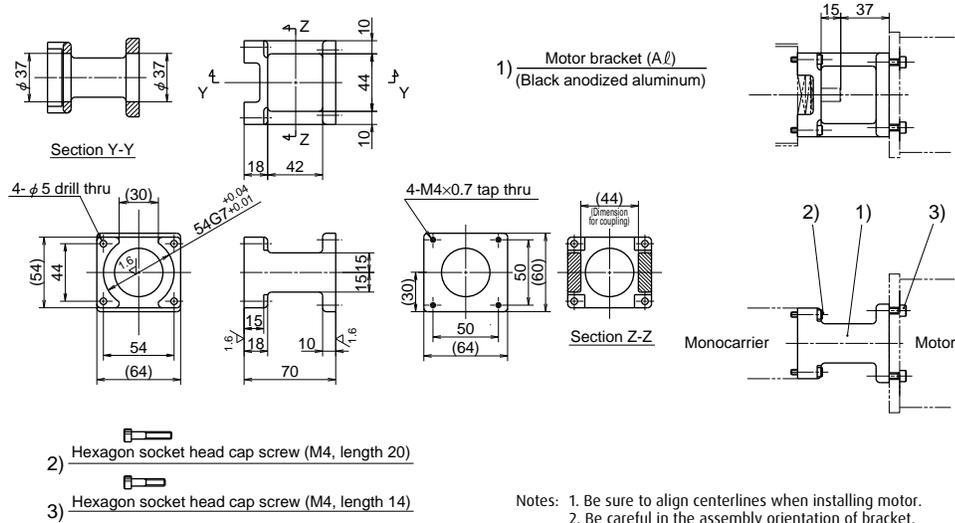


- Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM603xxx, PBM604xxx, 103F78xx
Oriental Motor Co., Ltd.	AS66, ASC66, UPK56xx, PK56xx, CSK56x, CFK56x, UFK56x

MCM08

Reference Number
MC-BK08-190-00

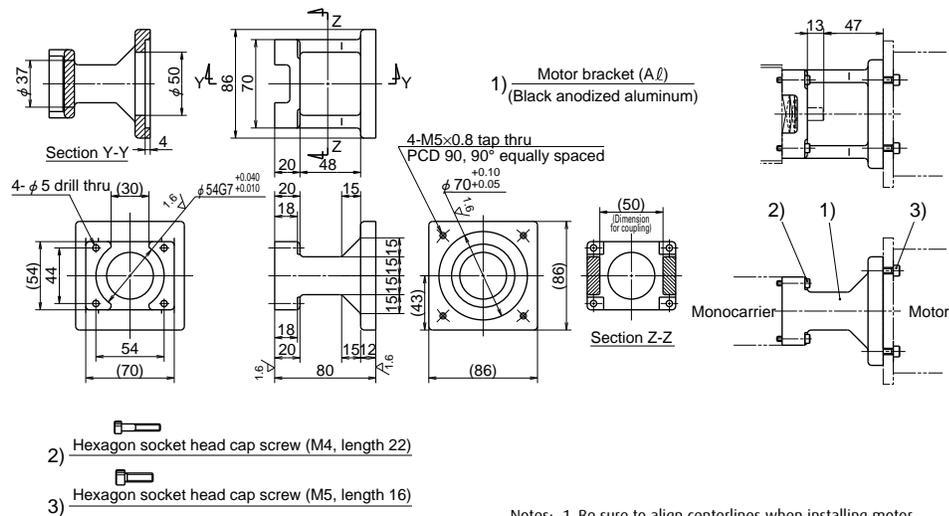


- Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

MCM08

Reference Number
MC-BK08-270-00

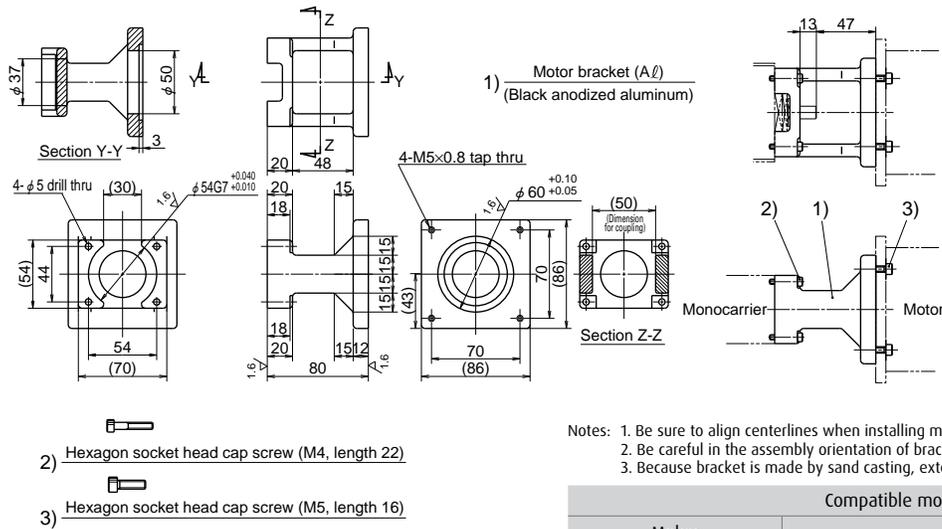


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Oriental Motor Co., Ltd.	AS98, UPK59x, PK59x, CSK59x, CFK59x, UFK59x
Sanyo Denki Co., Ltd.	103F85xx

MCM10

Reference Number
MC-BK10-170-00

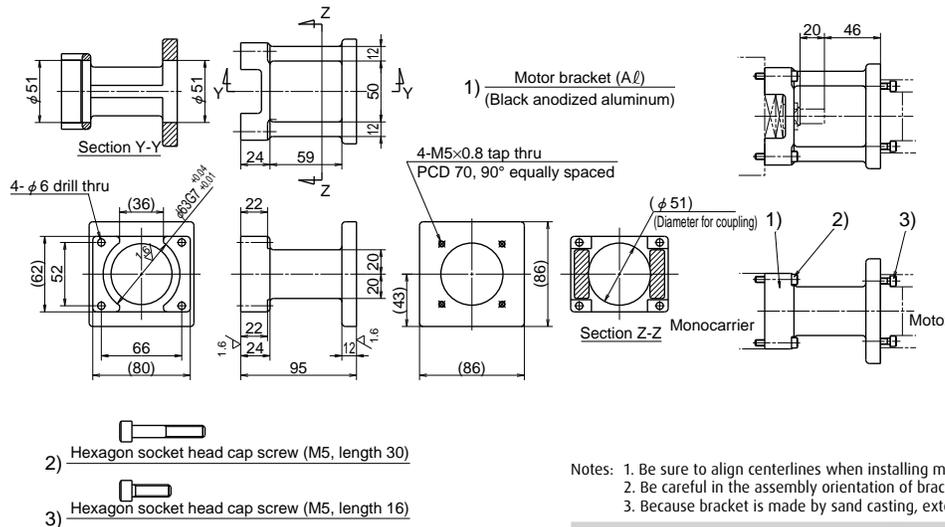


Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMJV-02A(200W), SGMVA-02A(200W), SGMJV-04A(400W), SGMVA-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
Sanyo Denki Co., Ltd.	P30B06020(200W), P30B06040(400W)

MCM10

Reference Number
MC-BK10-170-01

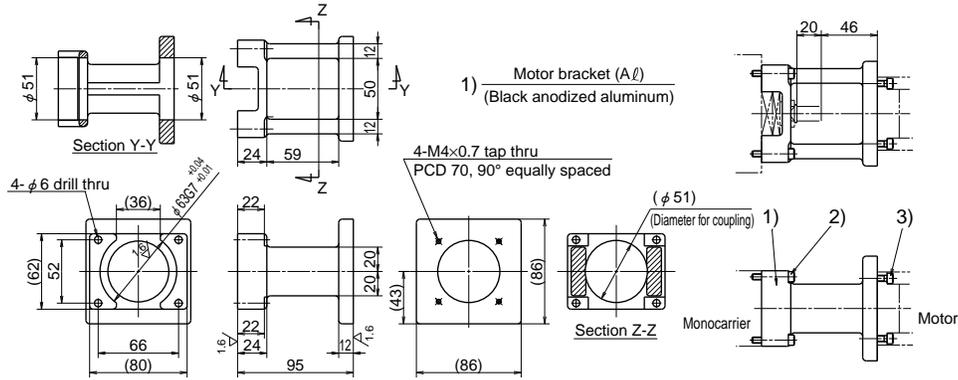


- 2) Hexagon socket head cap screw (M5, length 30)
- 3) Hexagon socket head cap screw (M4, length 16)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

MCM10

Reference Number
MC-BK10-190-00

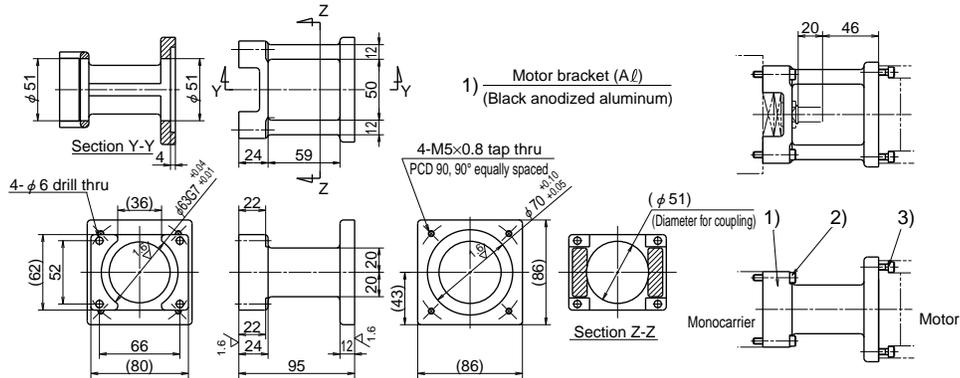


- 2) Hexagon socket head cap screw (M5, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
Sanyo Denki Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

MCM10

Reference Number
MC-BK10-270-00

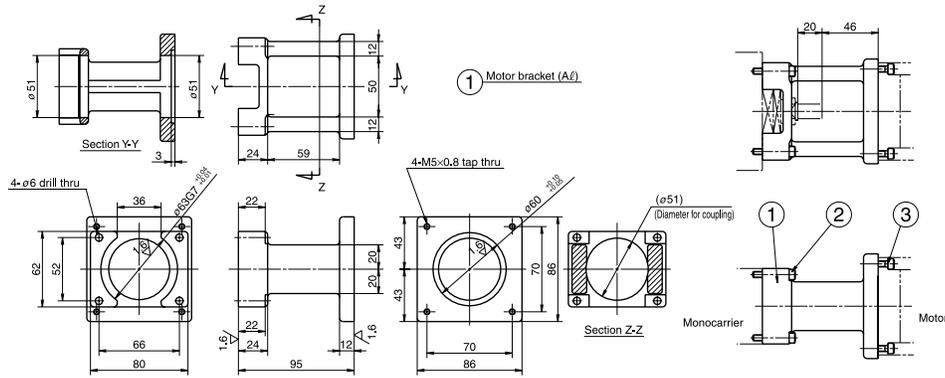

- ② Hexagon socket head cap screw (M5, length 30)
- ③ Hexagon socket head cap screw (M5, length 18)

Notes: 1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	103F85xx
Oriental Motor Co., Ltd.	AS98, UPK59x, PK59x, CSK59x, CFK59x, UFK59x

Motor Brackets for MCM Series by Japanese Motor Manufacturer


Model No.	Reference No. code	Motor bracket reference no.	Motor manufacturer	Stepping motor model no.	Wattage of AC servo motor											
					10	20	30	50	60	100	150	200	300	400	750	
MCM02	1	MC-BK02-128-00	Yaskawa Electric Corp.		SGMM-A1	SGMM-A2										
	2	MC-BK02-133-00	Mitsubishi Electric Corp.		HC-AQ013	HC-AQ023										
	3	MC-BK02-223-00	Oriental Motor Co., Ltd.	PMU33/35 (5-phase) PMC33/35 (5-phase)												
MCM03	1	MC-BK03-146-00	Yaskawa Electric Corp.				SGMAH-A3	SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMAV-C2A					
			Mitsubishi Electric Corp.				HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13							
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10						
	2	MC-BK03-148-01	Sanyo Denki Co., Ltd.													
	3	MC-BK03-231-00	Sanyo Denki Co., Ltd.	PBM423xxx 103F55xx												
MCM05	1	MC-BK05-145-00	Panasonic Co., Ltd.					MSMD05A		MSMD01						
	2	MC-BK05-146-00	Yaskawa Electric Corp.				SGMAH-A3	SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMAV-C2A					
			Mitsubishi Electric Corp.				HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13							
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10						
	3	MC-BK05-148-00	Panasonic Co., Ltd.													
4	MC-BK05-160-00	Sanyo Denki Co., Ltd.														
MCM06	1	MC-BK06-146-00	Yaskawa Electric Corp.					MSMD05A		MSMD01						
			Mitsubishi Electric Corp.				HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13							
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10						
	3	MC-BK06-148-00	Panasonic Co., Ltd.													
	4	MC-BK06-160-00	Sanyo Denki Co., Ltd.													
	5	MC-BK06-170-00	Yaskawa Electric Corp.													
	6	MC-BK06-170-01	Panasonic Co., Ltd.													
MCM08	1	MC-BK08-146-00	Yaskawa Electric Corp.													
			Mitsubishi Electric Corp.				HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13							
			OMRON Corp.				R88M-W03	R88M-W05		R88M-W10						
	2	MC-BK08-170-00	Yaskawa Electric Corp.													
	3	MC-BK08-170-01	Panasonic Co., Ltd.													
	4	MC-BK08-190-00	Sanyo Denki Co., Ltd.													
	5	MC-BK08-250-00	Oriental Motor Co., Ltd.	AS66, ASC66, UPK56x, PK56x, CSK56x, CFK56x, UFK56x												
MCM10	1	MC-BK10-170-00	Yaskawa Electric Corp.													
			Mitsubishi Electric Corp.				HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43							
			OMRON Corp.				R88M-W20	R88M-W40		R88M-W80						
	2	MC-BK10-170-01	Panasonic Co., Ltd.													
3	MC-BK10-190-00	Panasonic Co., Ltd.														
4	MC-BK10-270-00	Oriental Motor Co., Ltd.	AS98, UPK59x, PK59x, CSK59x, CFK59x, UFK59x													

2.3.4 Combining Brackets

Please ask NSK for bracket not shown.

MCM02 to MCM02 Combining Bracket


Reference Number: MC-1K0202-D-31

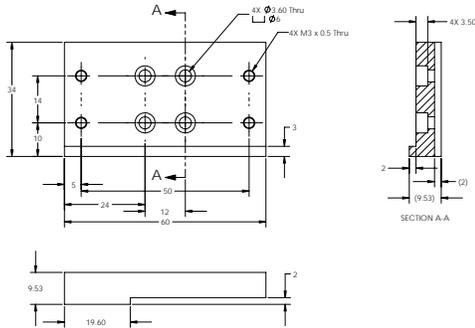

Description	Part Number	Qty
MCM02 to MCM02 Combining Bracket	UB890202D-301	1
M3x6 Socket Head Cap Screw	TAB3x6	4
M3x6 Button Head Cap Screw	GF4-91239A111	4

MCM03 to MCM02 Combining Bracket


Reference Number: MC-1K0302-D-31

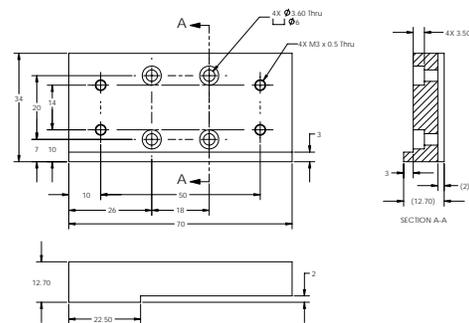

Description	Part Number	Qty
MCM03 to MCM02 Combining Bracket	UB890302D-301	1
M3x8 Socket Head Cap Screw	TAB3x8	4
M3x8 Button Head Cap Screw	GF4-91239A113	4

MCM03 to MCM03 Combining Bracket

Reference Number: MC-1K0303-D-31

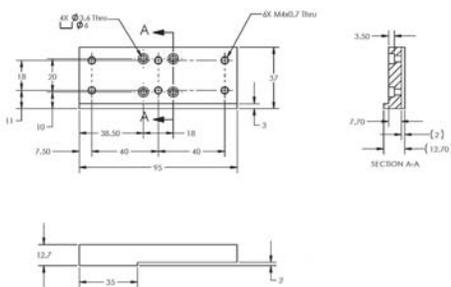


Description	Part Number	Qty
MCM03 to MCM03 Combining Bracket	UB890303D-30X	1
M3x8 Socket Head Cap Screw	TAB3x8	4
M4x8 Socket Head Cap Screw	TAB4x8	6

MCM03 to MCM03 combining bracket can only be used with 1 or 2 mm lead.

MCM05 to MCM03 Combining Bracket

Reference Number: MC-1K0503-D-31

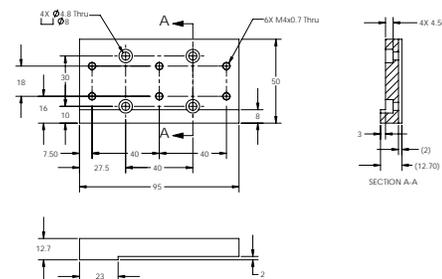


Description	Part Number	Qty
MCM05 to MCM03 Combining Bracket	UB890503D-301	1
M4x8 Socket Head Cap Screw	TAB4x8	10

*When the combining bracket is used, only the top cover and one side cover can be used.

MCM05 to MCM05 Combining Bracket


Reference Number: MC-IK0505-D-32

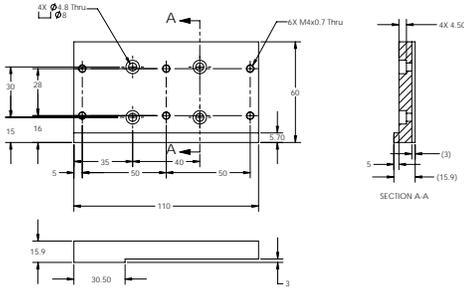

Description	Part Number	Qty
MCM05 to MCM05 Combining Bracket	UB890505D-30x	1
M4x8 Socket Head Cap Screw	TAB4x8	4
M4x12 Socket Head Cap Screw	TAB4x12	6

MCM08 to MCM05 Combining Bracket


Reference Number: MC-IK0805-D-32

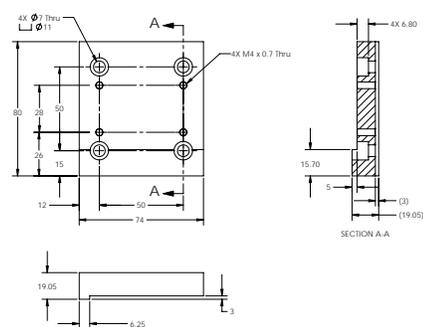

Description	Part Number	Qty
MCM08 to MCM05 Combining Bracket	UB890805D-302	1
M4x12 Socket Head Cap Screw	TAB4x12	4
M6x14 Socket Head Cap Screw	TAB6x14	4

MCM08 to MCM06 Combining Bracket


Reference Number: MC-IK0806-D-31

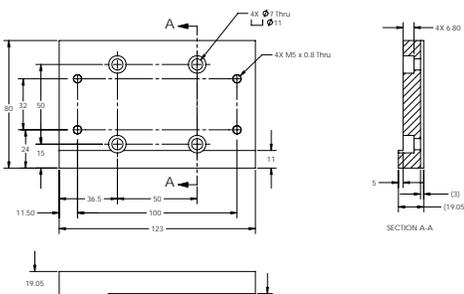

Description	Part Number	Qty
MCM08 to MCM06 Combining Bracket	UB890806D-301	1
M5x16 Socket Head Cap Screw	TAB5x16	4
M6x14 Socket Head Cap Screw	TAB6x14	4

MCM10 to MCM05 Combining Bracket

Reference Number: MC-IK1005-D-31

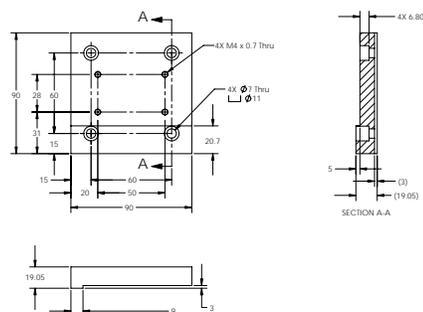


Description	Part Number	Qty
MCM10 to MCM05 Combining Bracket	UB891005D-301	1
M4x12 Socket Head Cap Screw	TAB4x12	4
M6x14 Socket Head Cap Screw	TAB6x14	4

*When the combining bracket is used, only the top cover and one side cover can be used.

MCM10 to MCM06 Combining Bracket

Reference Number: MC-1K1006-D-31

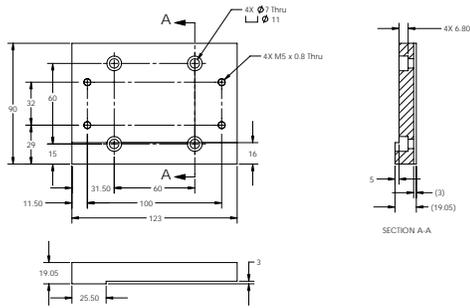


Description	Part Number	Qty
MCM10 to MCM06 Combining Bracket	UB891006D-302	1
M5x16 Socket Head Cap Screw	TAB5x16	4
M6x14 Socket Head Cap Screw	TAB6x14	4

*When the combining bracket is used, only the top cover and one side cover can be used.


MCM10 to MCM08 Combining Bracket

Reference Number: MC-1K1008-D-35

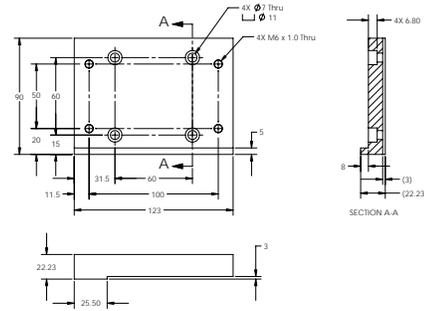

Description	Part Number	Qty
MCM10 to MCM06 Combining Bracket	UB891006D-302	1
M5x16 Socket Head Cap Screw	TAB5x16	4
M6x14 Socket Head Cap Screw	TAB6x14	4





3.1	MCH Series Reference Number Coding.....	76
3.2	MCH Series Dimension Table of Standard Products	
	MCL06	77
	MCH06	78
	MCH09	80
	MCH10.....	82
3.3	MCH Series Optional Accessories	
	3.3.1 Sensor Unit	84
	3.3.2 Cover Unit.....	86
	3.3.3 Motor Bracket by NEMA Size.....	89
	3.3.4 Intermediate Plate For Motor.....	91

3 MCH Series

3.1 MCH Series Reference Number Coding

[Body]

MC	H	06	040	H	10	K	(B^{*1}	2)
MONOCARRIER	SERIES	NOMINAL SIZE	STROKE	ACCURACY GRADE	BALL SCREW LEAD	SLIDER SPECIFICATION	GREASE SPECIFICATION	NSK MANAGEMENT NUMBER
MC: Monocarrier	H: MCH Series L: MCH Series Low Profile Rail (only for 06 size)	Rail width, unit: 10 mm	Unit: 10 mm	H: High Precision P: Precision Grade	Unit: mm	K: Single slider D: Double slider	B: Clean Grease LG2	0 2

*1: These two code fields shall be added when non-standard grease is used.

14th digit is control No. of NSK. Customers cannot specify a number. See the pages of each nominal number for details.

[With Optional Accessories]

MC	S	06 040 H 10 K 0 0	K	0	0	0
	OPTIONAL ACCESSORIES		NSK MANAGEMENT NUMBER	SENSOR UNIT	COVER UNIT	INTERMEDIATE PLATE FOR MOTOR BRACKET
	S: With MCH optional components R: With MCL optional components					

Note: Optional components are available separately.

Sensor Unit

Reference Number Code	Specification	Reference Number
0	N/A	—
1	Proximity switch (normally close 3 pieces)	MC—SRHxx—10
2	Proximity switch (normally open 3 pieces)	MC—SRHxx—11
3	Proximity switch (normally open 1 piece, normally close 2 pieces)	MC—SRHxx—12
4	Photo sensor 3 pieces	MC—SRHxx—13

Notes: 1). xx: Nominal size.
2). Sensor rail is not included in sensor unit. If you require rail, please specify when ordering.

Cover Unit

Reference Number Code	Specification	Reference Number
0	N/A	—
1	For single slider For double slider	MC—HVxxxx—00 MC—HVxxxxD00

Note xxxxx: Nominal size and stroke number


Intermediate Plate for Motor Bracket

Reference Number Code	Type		
	MCH06 (MCL06)	MCH09	MCH10
0	N/A	N/A	N/A
1	MC-BKH06-145-00	MC-BKH09-145-00	MC-BKH10-170-00
2	MC-BKH06-146-00	MC-BKH09-146-00	MC-BKH10-170-01
3	MC-BKH06-231-00	MC-BKH09-170-00	MC-BKH10-190-00
4	MC-BKH06-250-00	MC-BKH09-170-01	MC-BKH10-190-01
5	—	MC-BKH09-231-00	MC-BKH10-250-00
6	—	MC-BKH09-250-00	MC-BKH10-270-00

3.2 MCH Series Dimension Table of Standard Products

MCL06

Accuracy Grade: High Grade (H)

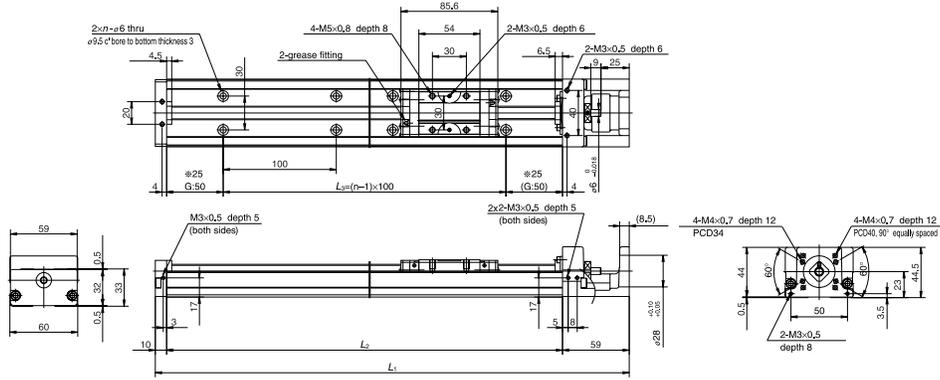

- The rail of MCL06 is made lighter than that of MCH06 by lowering the rail height. The weight ratio between the MCH06 and MCL06 is 5 to 4.
- Double slider specification is also available for the MCL06.
- Combinations of stroke and ball screw lead of the MCL06 are the same as those of the MCH06.

Dimension of MCL06 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCL06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.0
*MCL06005H10K02			10						
MCL06010H05K02	100	103 (115)	5	269	200	100	2	3.17	1.3
MCL06010H10K02			10						
MCL06020H05K02	200	203 (215)	5	369	300	200	3	4.51	1.9
MCL06020H10K02			10						
MCL06030H10K02	300	303 (315)	10	469	400	300	4	6.80	2.6
MCL06030H20K02			20						
MCL06040H10K02	400	403 (415)	10	569	500	400	5	8.13	3.2
MCL06040H20K02			20						
MCL06050H10K02	500	503 (515)	10	669	600	500	6	9.47	3.9
MCL06050H20K02			20						

Notes: 1). Dimension G is 45 for items marked with *.

2). The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	5	1.0 - 4.8
	10	1.1 - 5.8
	20	1.6 - 7.9

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit load limit (N)
		Ball screw C ₀	Linear guides C	Support unit C ₀	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø12	3,760	22,800	4,400	5	6,310	16,300	1,450
10		2,420	18,100		10	3,790		
20		2,420	14,400		20	3,790		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	335	133	133

MCH06

Accuracy Grade: High Grade (H)

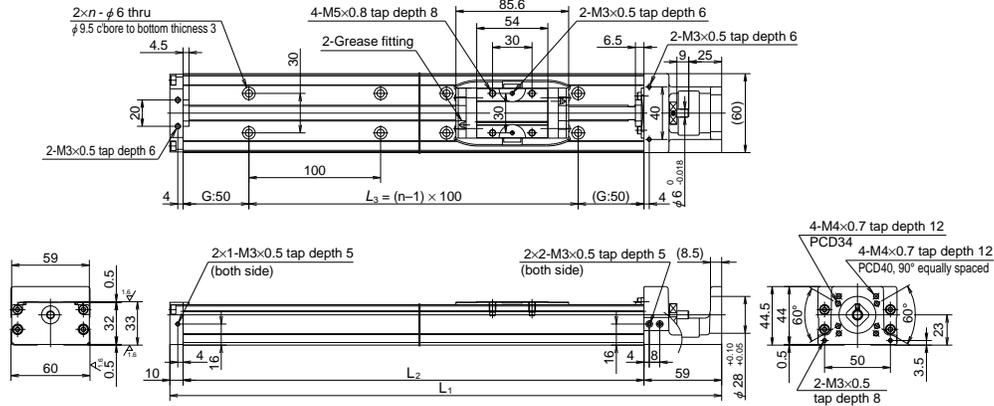

Dimension of MCH06 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1 SM)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
*MCH06005H05K02	50	53 (65)	5	219	150	100	2	2.38	1.8
*MCH06005H10K02			10						
*MCH06005H20K02			20						
MCH06010H05K02	100	103 (115)	5	269	200	100	2	3.17	2.2
MCH06010H10K02			10						
MCH06010H20K02			20						
MCH06020H05K02	200	203 (215)	5	369	300	200	3	4.51	3.0
MCH06020H10K02			10						
MCH06020H20K02			20						
MCH06030H05K02	300	303 (315)	5	469	400	300	4	5.85	3.7
MCH06030H10K02			10						
MCH06030H20K02			20						
MCH06040H05K02	400	403 (415)	5	569	500	400	5	7.18	4.5
MCH06040H10K02			10						
MCH06040H20K02			20						
MCH06050H05K02	500	503 (515)	5	669	600	500	6	8.52	5.2
MCH06050H10K02			10						
MCH06050H20K02			20						

Notes: 1). Dimension G is 45 for items marked with *.

2). The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	5	1.0 - 4.8
	10	1.1 - 5.8
	20	1.6 - 7.9

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C ₀	Linear guides C	Support unit C ₀	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø12	3,760	22,800	4,400	5	6,310	16,300	1,450
10		2,420	18,100		10	3,790		
20		2,420	14,400		20	3,790		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	335	133	133

MCH06 (Double Slider)

Accuracy Grade: High Grade (H)

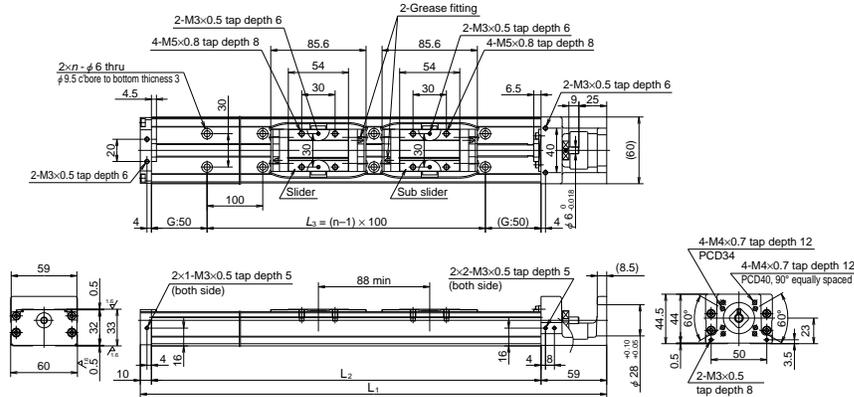

Dimension of MCH06 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCH06010H05D02	100	115 (139)	5	369	300	200	3	4.82	3.5
MCH06010H10D02			10						
MCH06020H05D02	200	215 (239)	5	469	400	300	4	8.06	4.2
MCH06020H10D02			10						
MCH06030H05D02	300	315 (339)	5	569	500	400	5	9.4	5.0
MCH06030H10D02			10						
MCH06040H10D02	400	415 (439)	10	669	600	500	6	10.7	5.7
MCH06040H20D02			20						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	5	1.2 - 5.2
	10	1.5 - 9.6
	20	2.3 - 11.8

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
5	Ø12	3,760	22,800	4,400	5	6,310	16,300	1,450
10		2,420	18,100		10	3,790		
20		2,420	14,400		20	3,790		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Double	770	730	730

MCH09

Accuracy Grade: High Grade (H)

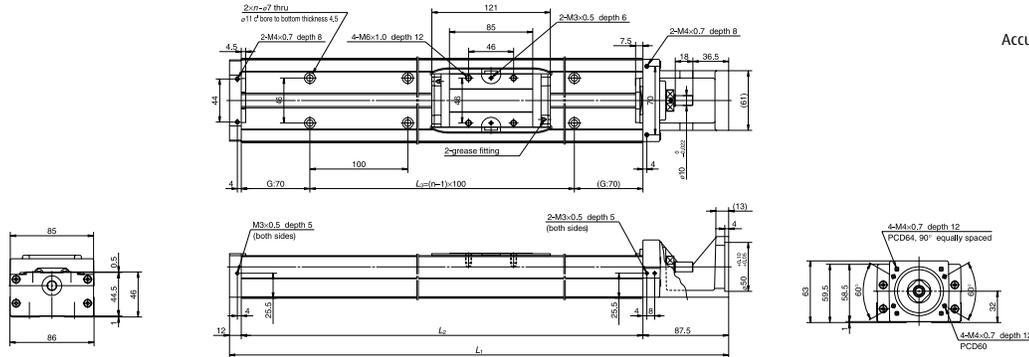

Dimension of MCH09 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia × 10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCH09010H05K02	100	107 (121)	5	339.5	240	100	2	9.2	5.0
MCH09010H10K02			10						
MCH09010H20K02			20						
MCH09020H05K02	200	207 (221)	5	439.5	340	200	3	12.4	6.5
MCH09020H10K02			10						
MCH09020H20K02			20						
MCH09030H05K02	300	307 (321)	5	539.5	440	300	4	15.6	8.1
MCH09030H10K02			10						
MCH09030H20K02			20						
MCH09040H05K02	400	407 (421)	5	639.5	540	400	5	18.8	9.7
MCH09040H10K02			10						
MCH09040H20K02			20						
MCH09050H05K02	500	507 (521)	5	739.5	640	500	6	22.0	11.0
MCH09050H10K02			10						
MCH09050H20K02			20						
MCH09060H05K02	600	607 (621)	5	839.5	740	600	7	25.2	13.0
MCH09060H10K02			10						
MCH09060H20K02			20						
MCH09070H05K02	700	707 (721)	5	939.5	840	700	8	28.4	14.5
MCH09070H10K02			10						
MCH09070H20K02			20						
MCH09080H05K02	800	807 (821)	5	1,039.50	940	800	9	31.6	16.0
MCH09080H10K02			10						
MCH09080H20K02			20						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	5	1.0 - 5.9
	10	2.0 - 7.8
	20	2.0 - 10.8

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.


Basic Load Rating

Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Rated running distance L _r (km)	Ball screw C _{0s}	Linear guides C ₀	
5	Ø15	7,070	40,600	7,100	5	12,800	30,500	3,040
10		7,070	32,200		10	12,800		
20		4,560	25,500		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	890	385	385

MCH09 (Double Slider)

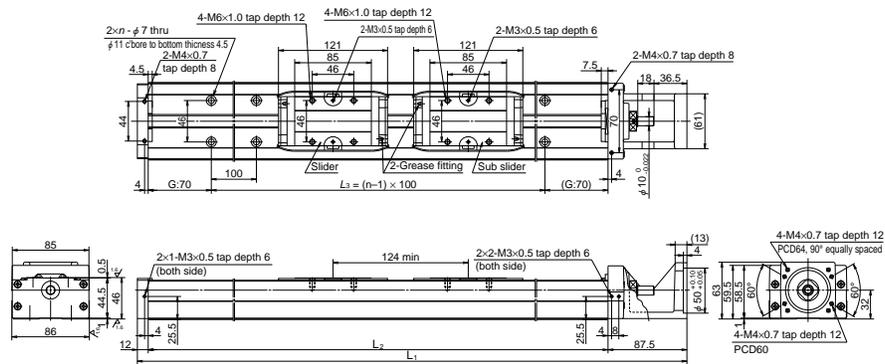

Accuracy Grade: High Grade (H)

Dimension of MCH09 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)			No. of mounting holes n	Inertia ×10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃			
MCH09015H05D02	150	183 (211)	5	539.5	440	300	4	16.1	8.9
MCH09015H10D02			10						
MCH09025H05D02	250	283 (311)	5	639.5	540	400	5	19.3	11.0
MCH09025H10D02			10						
MCH09035H05D02	350	383 (411)	5	739.5	640	500	6	22.5	12.0
MCH09035H10D02			10						
MCH09045H10D02	450	483 (511)	10	839.5	740	600	7	28.8	14.0
MCH09045H20D02			20						
MCH09065H10D02	650	683 (711)	10	1,039.5	940	800	9	35.2	17.0
MCH09065H20D02			20						

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)

Ball screw lead (mm)	5	1.5 - 7.0
10	10	2.5 - 10.8
20	20	4.0 - 17.2

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
5	Ø15	7,070	40,600	7,100	5	12,800	30,500	3,040
10		7,070	32,200		10	12,800		
20		4,560	25,500		20	7,730		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Double	1,780	2,070	2,070

MCH10

Accuracy Grade: High Grade (H)

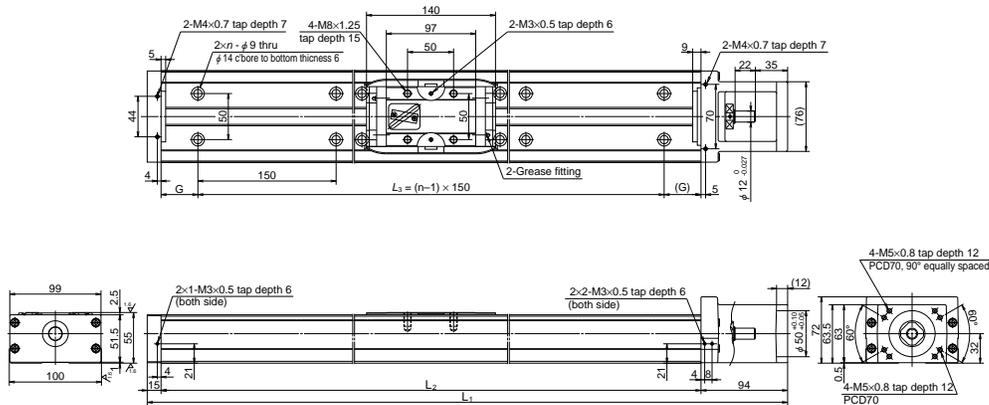

Dimension of MCH10 (Single Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (without K1™)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia ×10 ⁻⁶ (kg · m ²)	Mass (kg)
				L ₁	L ₂	G	L ₃			
MCH10010H10K02	100	126 (142)	10	389	280	65	150	2	33.2	7.3
MCH10010H20K02		20	41.1							
MCH10020H10K02	200	226 (242)	10	489	380	40	300	3	43.4	9.5
MCH10020H20K02		20	51.3							
MCH10030H10K02	300	326 (342)	10	589	480	15	450	4	53.7	12.0
MCH10030H20K02		20	61.6							
MCH10040H10K02	400	426 (442)	10	689	580	65	450	4	62.4	14.0
MCH10040H20K02		20	71.8							
MCH10050H10K02	500	526 (542)	10	789	680	40	600	5	74.7	16.0
MCH10050H20K02		20	82.3							
MCH10060H10K02	600	626 (642)	10	889	780	15	750	6	84.9	19.0
MCH10060H20K02		20	92.5							
MCH10070H10K02	700	726 (742)	10	989	880	65	750	6	95.1	21.0
MCH10070H20K02		20	103							
MCH10080H10K02	800	826 (842)	10	1,089	980	40	900	7	105	23.0
MCH10080H20K02		20	113							
MCH10090H10K02	900	926 (842)	10	1,189	1,080	15	1,050	8	116	25.0
MCH10090H20K02		20	123							
MCH10100H10K02	1,000	1,026 (1,042)	10	1,289	1,180	65	1,050	8	126	27.0
MCH10100H20K02		20	133							
MCH10110H10K02	1,100	1,126 (1,142)	10	1,389	1,280	40	1,200	9	136	29.0
MCH10110H20K02		20	143							
MCH10120H10K02	1,200	1,226 (1,242)	10	1,489	1,380	15	1,350	10	146	32.0
MCH10120H20K02		20	154							

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead	10	2.7 - 10.8
(mm)	20	3.1 - 12.7

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead ℓ (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _s	Linear guides C	Support unit C _s	Ball screw C _{0s}	Linear guides C ₀	
10	Ø20	11,000	44,600	7,600	21,100	42,000	3,380
20		7,060	35,400		12,700		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{Ro}	Pitching M _{Po}	Yawing M _{Yo}
Single	1,460	610	610

MCH10 (Double Slider)

Accuracy Grade: High Grade (H)

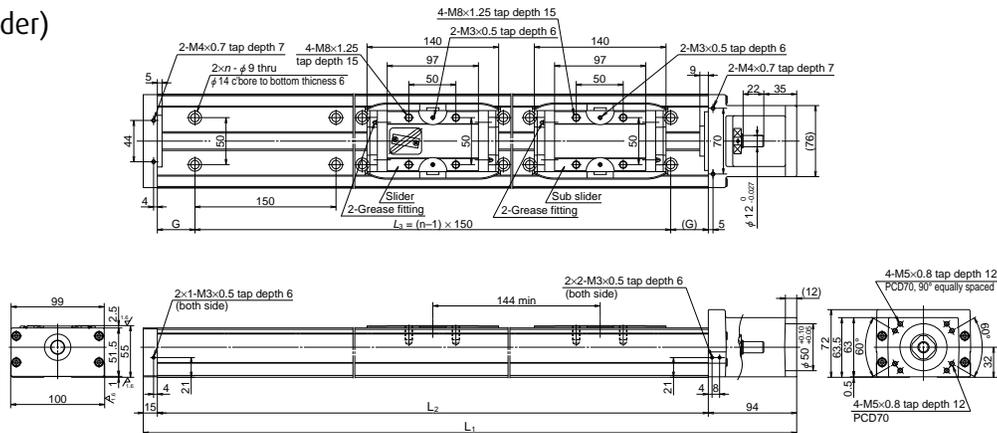

Dimension of MCH10 (Double Slider)

Reference number	Nominal stroke (mm)	Stroke limit (mm) (K1™ is not equipped)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ ($\text{kg} \cdot \text{m}^2$)	Mass (kg)
				L ₁	L ₂	G	L ₃			
MCH10025H10D02	250	282 (314)	10	689	580	65	450	4	67.1	15
MCH10025H20D02										
MCH10035H10D02	350	382 (414)	10	789	680	40	600	5	77.3	17
MCH10035H20D02										
MCH10045H10D02	450	482 (514)	10	889	780	15	750	6	87.5	20
MCH10045H20D02										
MCH10055H10D02	550	582 (614)	10	989	880	65	750	6	97.7	22
MCH10055H20D02										
MCH10065H10D02	650	682 (714)	10	1,089	980	40	900	7	108.0	24
MCH10065H20D02										
MCH10075H20D02	750	782 (814)	20	1,189	1,080	15	1,050	8	133.0	26
MCH10085H20D02	850	882 (914)	20	1,289	1,180	65	1,050	8	143.0	28
MCH10095H20D02	950	982 (1,014)	20	1,389	1,280	40	1,200	9	154.0	30
MCH10105H20D02	1,050	1,082 (1,114)	20	1,489	1,380	15	1,350	10	164.0	33

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

Grease	High-grade	Precision-grade
Standard	02	(None)
LG2	B2	B0

Monocarrier dynamic torque specification (N · cm)		
Ball screw lead (mm)	10	4.2 - 15.6
	20	5.0 - 19.6

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic Load Rating


Lead l (mm)	Shaft dia d (mm)	Basic dynamic load rating (N)				Basic static load rating (N)		Support unit Load limit (N)
		Ball screw C _a	Linear guides C	Support unit C _a	Rated running distance L _r (km)	Ball screw C _{0a}	Linear guides C ₀	
10	Ø20	11,000	44,600	7,600	10	21,100	42,000	3,380
20		7,060	35,400		20	12,700		

Basic Static Moment Load of Linear Guide

Slider	Basic static moment load (N · m)		
	Rolling M _{R0}	Pitching M _{P0}	Yawing M _{Y0}
Single	2,920	3,430	3,430

3.3 MCH Series Optional Accessories
3.3.1 Sensor Unit

Proximity Switch

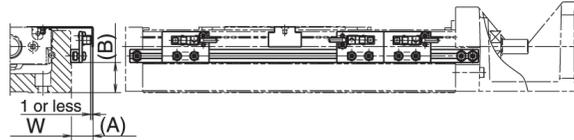


(Example of assembly)

Type	Reference Number	Dimension (A) (mm)	Dimension (B) (mm)	Body width W (mm)	
MCH06	MC-SRH06-10 MC-SRH06-11 MC-SRH06-12	17	10	60	
MCH09	MC-SRH09-10 MC-SRH09-11 MC-SRH09-12	16	21	86	
MCH10	MC-SRH10-10 MC-SRH10-11 MC-SRH10-12	16	16	100	
Quantity	Proximity switch (normally open contact)	—	3	1	E2S-W13 (OMRON Corp.)
	Proximity switch (normally close contact)	3	—	2	E2S-W14 (OMRON Corp.)

Photo Sensor

Sensor rail is not included in a sensor unit.

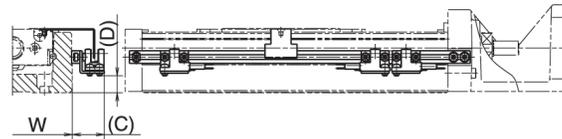


(Example of assembly)

Type	NPN Sensor Reference Number	PNP Sensor Reference Number	Dimension (C) (mm)	Dimension (D) (mm)	Body width W (mm)	Remarks
MCH06	MC-SRH06-13	MC-SRH06-36	24	2	60	EE-SX674 (OMRON Corp.)
MCH09	MC-SRH09-13	MC-SRH09-40	23	12	86	EE-SX674P (OMRON Corp.)
MCH10	MC-SRH10-13	MC-SRH10-31	23	16	100	3 sets (EE-1001 connector attachment)

Sensor Rail

Reference Number: MC-SRL- * * * *

* * * * is the same as rail dimension L2.

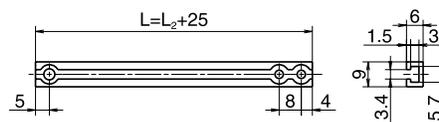

MCH Series and Sensor Rail Combination Table


Model No.	Body length L: (mm)	Reference No.	Sensor rail reference No.
MCH06	150	MCH06005H05K02	MC-SRL-0150
		MCH06005H10K02	
		MCH06005H20K02	
	200	MCH06010H05K02	MC-SRL-0200
		MCH06010H10K02	
		MCH06010H20K02	
	300	MCH06020H05K02	MC-SRL-0300
		MCH06020H10K02	
		MCH06020H20K02	
	400	MCH06030H05K02	MC-SRL-0400
		MCH06030H10K02	
		MCH06030H20K02	
	500	MCH06040H05K02	MC-SRL-0500
		MCH06040H10K02	
		MCH06040H20K02	
	600	MCH06050H05K02	MC-SRL-0600
		MCH06050H10K02	
		MCH06050H20K02	
MCL06	150	MCL06005H05K02 MCL06005H10K02	MC-SRL-0150
	200	MCL06010H05K02 MCL06010H10K02	MC-SRL-0200
	300	MCL06020H05K02 MCL06020H10K02	MC-SRL-0300
	400	MCL06030H05K02 MCL06030H20K02	MC-SRL-0400
	500	MCL06040H10K02 MCL06040H20K02	MC-SRL-0500
	600	MCL06050H10K02 MCL06050H20K02	MC-SRL-0600
MCH09	240	MCH09010H05K02	MC-SRL-0240
		MCH09010H10K02	
		MCH09010H20K02	
	340	MCH09020H05K02	MC-SRL-0340
		MCH09020H10K02	
		MCH09020H20K02	
	440	MCH09030H05K02	MC-SRL-0440
		MCH09030H10K02	
		MCH09030H20K02	
	540	MCH09015H05D02	MC-SRL-0540
		MCH09015H10D02	
		MCH09040H05K02 MCH09040H10K02 MCH09040H20K02	
640	MCH09025H05D02	MC-SRL-0640	
	MCH09025H10D02		
	MCH09050H05K02 MCH09050H10K02 MCH09050H20K02		
740	MCH09035H05D02	MC-SRL-0740	
	MCH09035H10D02		
	MCH09060H05K02 MCH09060H10K02 MCH09060H20K02		
		MCH09045H10D02 MCH09045H20D02	

Model No.	Body length L: (mm)	Reference No.	Sensor rail reference No.	
MCH09	840	MCH09070H05K02	MC-SRL-0840	
		MCH09070H10K02		
		MCH09070H20K02		
940	940	MCH09080H05K02	MC-SRL-0940	
		MCH09080H10K02		
		MCH09080H20K02 MCH09065H10D02 MCH09065H20D02		
MCH10	280	MCH10010H10K02 MCH10010H20K02	MC-SRL-0280	
	380	MCH10020H10K02 MCH10020H20K02	MC-SRL-0380	
	480	MCH10030H10K02 MCH10030H20K02	MC-SRL-0480	
	580	MCH10040H10K02 MCH10025H10D02 MCH10050H10K02	MC-SRL-0580	
	680	MCH10050H20K02 MCH10035H10D02 MCH10035H20D02	MC-SRL-0680	
	780	MCH10060H10K02 MCH10060H20K02 MCH10045H10D02 MCH10045H20D02	MC-SRL-0780	
	880	MCH10070H10K02 MCH10070H20K02 MCH10055H10D02	MC-SRL-0880	
	980	MCH10055H20D02 MCH10080H10K02 MCH10080H20K02	MC-SRL-0980	
	1,080	MCH10065H10D02 MCH10065H20D02 MCH10090H10K02	MC-SRL-1080	
	1,180	MCH10090H20K02 MCH10075H20D02 MCH10100H10K02	MC-SRL-1180	
	1,280	MCH10100H20K02 MCH10085H20D02 MCH10110H10K02	MC-SRL-1280	
	1,380	MCH10110H20K02 MCH10095H20D02 MCH10120H10K02 MCH10120H20K02	MC-SRL-1380	
			MCH10105H20D02	

3.3.2 Cover Unit

Cover Unit for MCH06

Cover Unit for MCL06

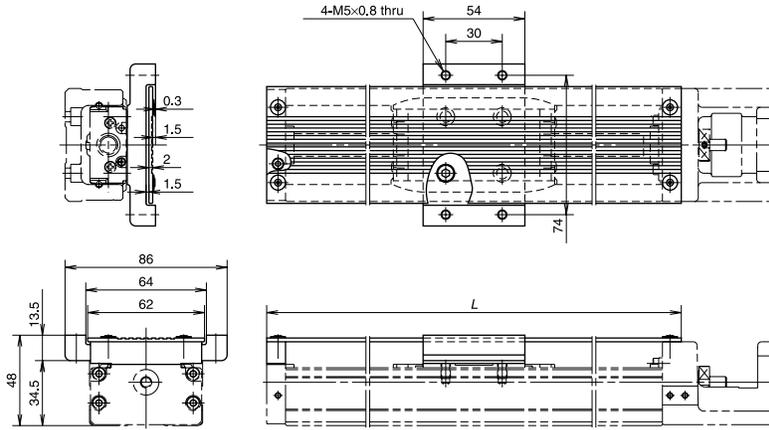


(Unit: mm)


Single Slider		Double Slider		Top cover length L
Stroke	Reference Number	Stroke	Reference Number	
50	MC-HV06005-00	—	—	170
100	MC-HV06010-00	—	—	220
200	MC-HV06020-00	100	MC-HV06010D00	320
300	MC-HV06030-00	200	MC-HV06020D00	420
400	MC-HV06040-00	300	MC-HV06030D00	520
500	MC-HV06050-00	400	MC-HV06040D00	620

Cover Unit for Double Sliders

Two spacers are provided for the double slider.

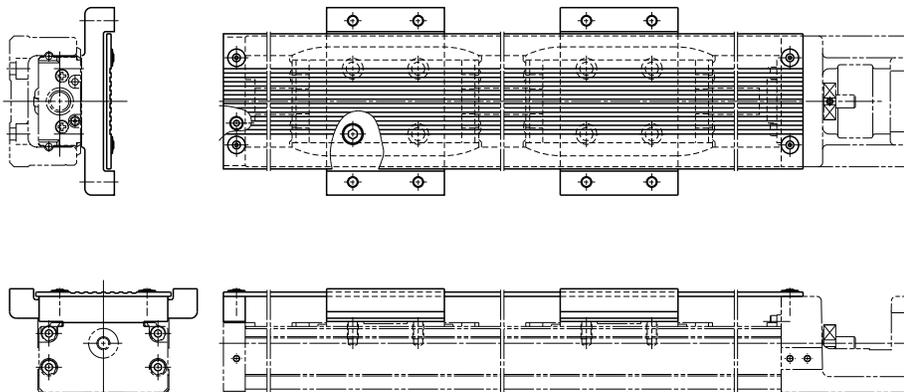

Cover Unit for MCH09

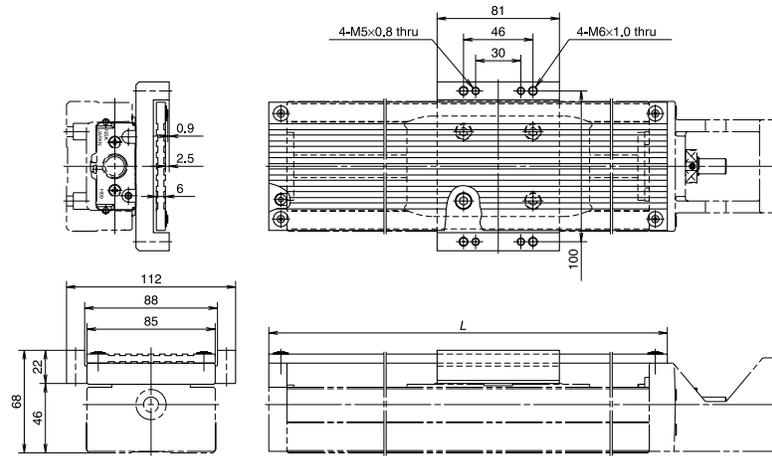


(Unit: mm)


Single Slider		Double Slider		Top cover length L
Stroke	Reference Number	Stroke	Reference Number	
100	MC-HV09010-00	—	—	264
200	MC-HV09020-00	—	—	364
300	MC-HV09030-00	150	MC-HV09015D00	464
400	MC-HV09040-00	250	MC-HV09025D00	564
500	MC-HV09050-00	350	MC-HV09035D00	664
600	MC-HV09060-00	450	MC-HV09045D00	764
700	MC-HV09070-00	—	—	864
800	MC-HV09080-00	650	MC-HV09065D00	964

Cover Unit for Double Sliders

Two spacers are provided for the double slider.

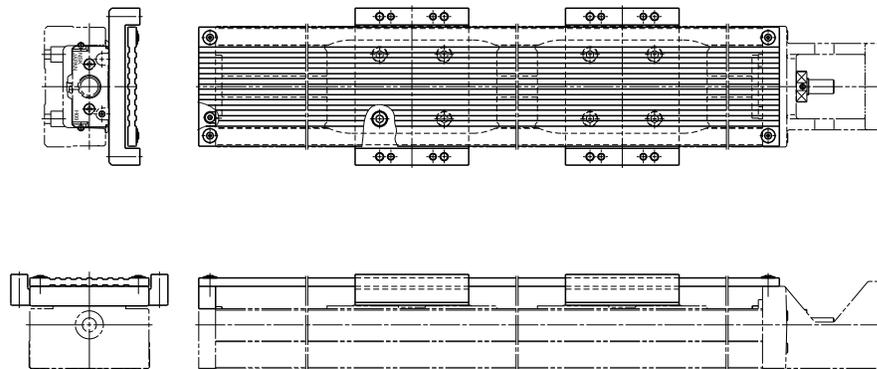

Cover Unit for MCH10

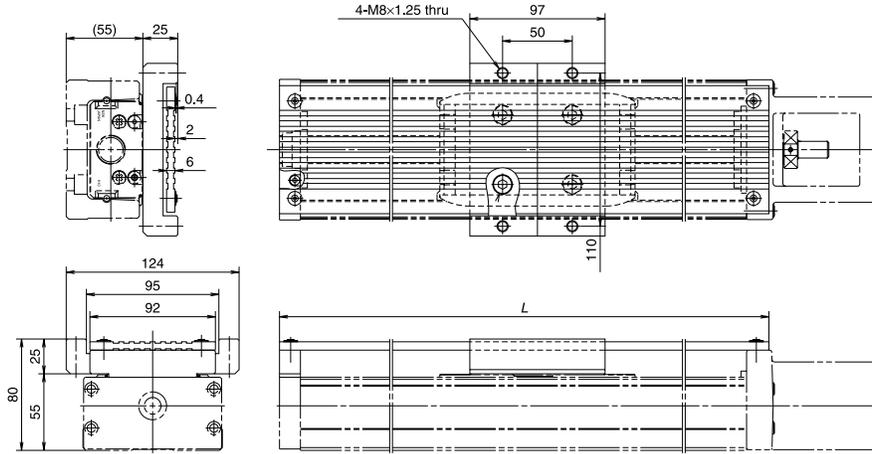


(Unit: mm)

Single Slider		Double Slider		Top cover length L
Stroke	Reference Number	Stroke	Reference Number	
100	MC-HV10010-00	—	—	310
200	MC-HV10020-00	—	—	410
300	MC-HV10030-00	—	—	510
400	MC-HV10040-00	250	MC-HV10025D00	610
500	MC-HV10050-00	350	MC-HV10035D00	710
600	MC-HV10060-00	450	MC-HV10045D00	810
700	MC-HV10070-00	550	MC-HV10055D00	910
800	MC-HV10080-00	650	MC-HV10065D00	1,010
900	MC-HV10090-00	750	MC-HV10075D00	1,110
1,000	MC-HV10100-00	850	MC-HV10085D00	1,210
1,100	MC-HV10110-00	950	MC-HV10095D00	1,310
1,200	MC-HV10120-00	1,050	MC-HV10105D00	1,410

Cover Unit for Double Sliders




Two spacers are provided for the double slider.

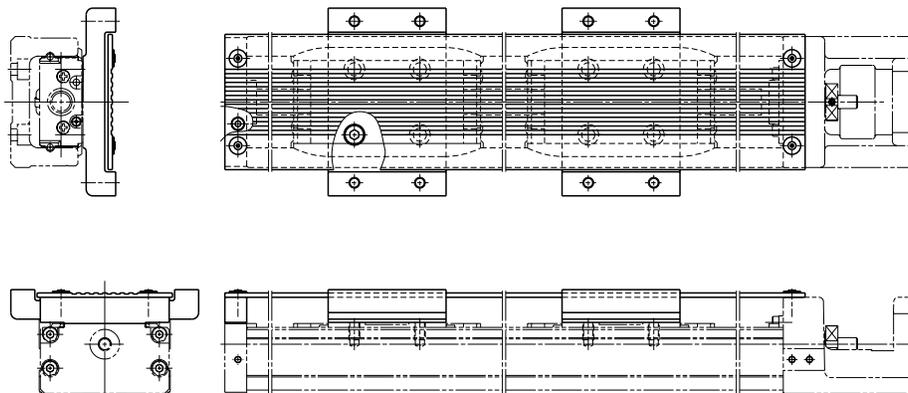

3.3.3 Motor Bracket by NEMA Size

MCH06 (NEMA 23)


Reference Number
MC-BKH06-247-31

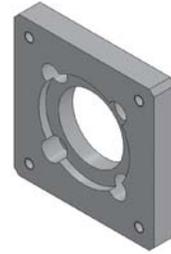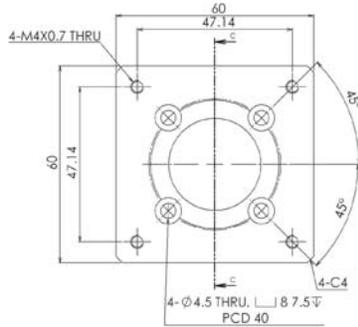

Included:
4 pcs M4x0.7x8 Socket Head Cap Screws

MCH09 (NEMA 23)

Reference Number
MC-BKH09-247-31

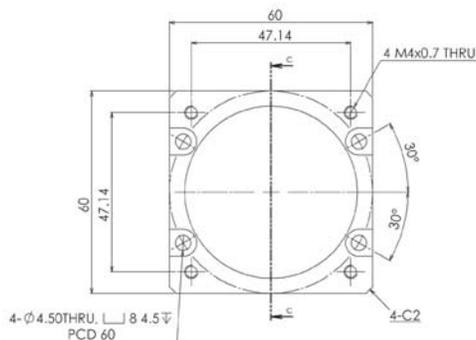



Included:
4 pcs M4x0.7x10 Socket Head Cap Screws

MCH Series

Rigid Type

MCH09 (NEMA 34)



Reference Number
MC-BKH09-269-31

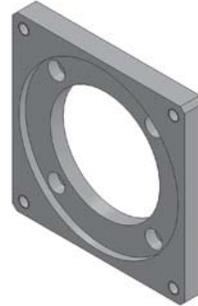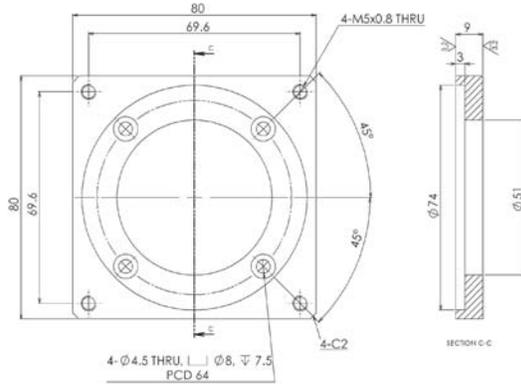

Included:
4 pcs M4x0.7x10 Socket Head Cap Screws

MCH10 (NEMA 34)

Reference Number
MC-BKH10-269-31

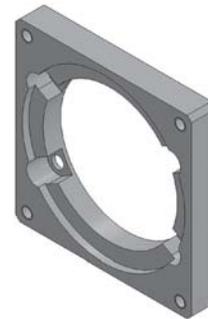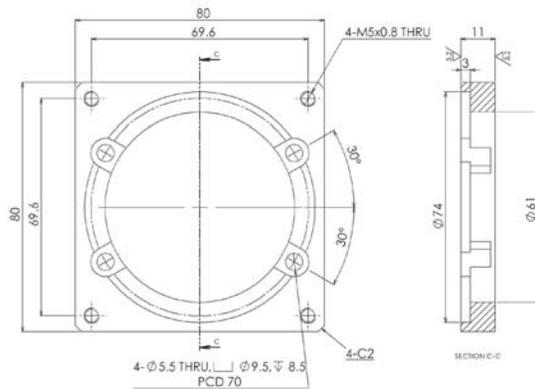


Included:
4 pcs M5x0.8x10 Socket Head Cap Screws

3.3.4 Intermediate Plate for Motor

- If you have a motor not listed below, please contact NSK.
- If you have an indirect motor mount, please contact NSK.

Motor Bracket for MCH06 and MCL06


Reference Number: MC-BKH06-145-00

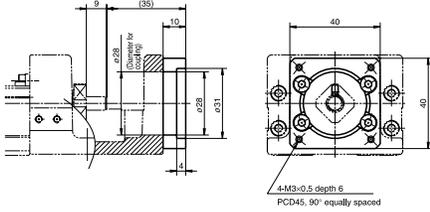

Compatible motor	
Maker	Motor models
Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)


- Be sure to align the center lines when installing the motor.
- Motor models are subject to change by the motor manufacturers. For details, please contact the manufacturer.

Reference Number: MC-BKH06-146-00

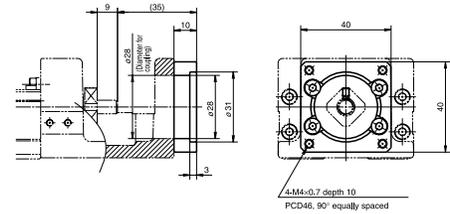


Compatible motor	
Maker	Motor models
Yaskawa Electric Corp.	SGMAH-A3(30W), SGMJV-A5A(50W), SGMJV-A5A(50W), SGMJV-01A(100W), SGMJV-01A(100W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
Sanyo Denki Co., Ltd.	P30B04xxx P Series

Reference Number: MC-BKH06-231-00

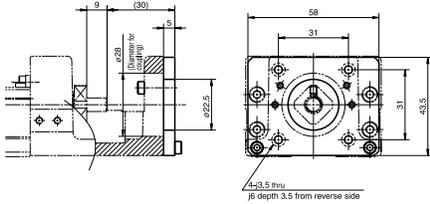



Compatible motor	
Maker	Motor models
Oriental Motor Co. Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x
Sanyo Denki Co., Ltd.	PBM423xxx, 103F55xx

Reference Number: MC-BKH06-250-00

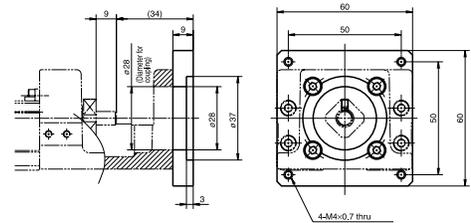


Compatible motor	
Maker	Motor models
Oriental Motor Co. Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x, MUMS02(200W), MUMS04(400W)
OMRON Corp.	MUMS02(200W), MUMS04(400W)
Sanyo Denki Co., Ltd.	PBM603xx, PBM604xx, 103F78xx

Diameter of ball screw shaft end to install a pulley for indirect motor mount of MCH06

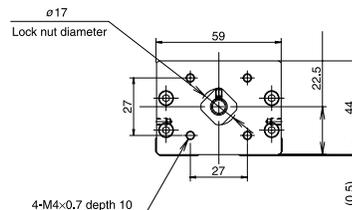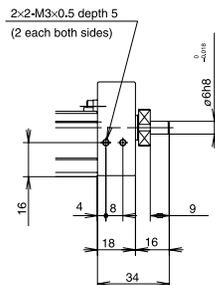


Motor Bracket for MCH09

Reference Number: MC-BKH09-145-00
MC-BKH09-146-00

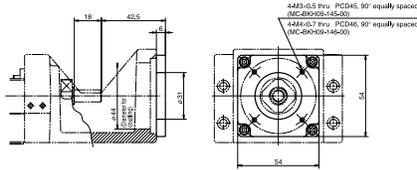


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-145-00	Panasonic Co., Ltd.	MSMD5A(50W), MSMD01(100W)
MC-BKH09-146-00	Yaskawa Electric Corp.	SGMJV-A5A(50W), SGMAV-A5A(50W), SGMJV-01A(100W), SGMAV-01A(100W)
	Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP05(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
	OMRON Corp.	R88M-W05(50W), R88M-W10(100W)
	Sanyo Denki Co., Ltd.	P30B04xxx P Series

Reference Number: MC-BKH09-170-00
MC-BKH09-170-01

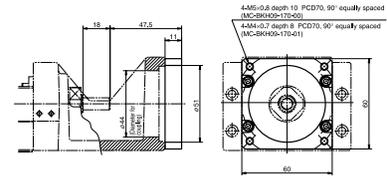


Reference No.	Compatible motor	
	Maker	Motor models
MC-BKH09-170-00	Yaskawa Electric Corp.	SGMJV-02A(200W), SGMAV-02A(200W), SGMJV-04A(400W), SGMAV-04A(400W)
	Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
	OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
	Sanyo Denki Co., Ltd.	P30B06xxx P Series
MC-BKH09-170-01	Panasonic Co., Ltd.	MSMD02(200W), MSMA02(200W), MSMA04(400W), MSMD04(400W)

Reference Number: MC-BKH09-231-00

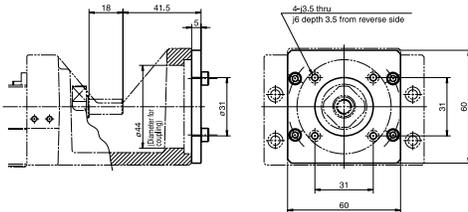


Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM423xxx, 103F55xx
Oriental Motor Co. Ltd.	AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x

Reference Number: MC-BKH09-250-00

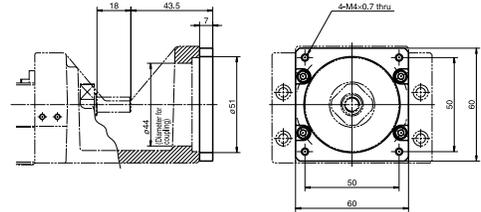

Compatible motor	
Maker	Motor models
Sanyo Denki Co., Ltd.	PBM603xx, PBM604xx, 103F78xx
Oriental Motor Co. Ltd.	AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x

Diameter of ball screw shaft end to install a pulley for indirect motor mount of MCH09

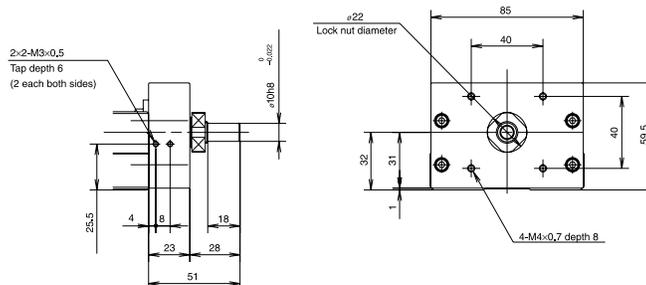

Intermediate Plates for MCH Series

Model No.	Reference No. code	Motor bracket reference no.	Motor manufacturer	Stepping motor model no.	Wattage of AC servo motor						
					30	50	100	200	400	750	
MCH06 MCL06	1	MC-BKH06-145-00	Panasonic Co., Ltd.			MSMD5A	MSMD01				
	2	MC-BKH06-146-00	Yaskawa Electric Corp.		SGMAH-A3	SGMJV-A5A SGMAV-A5A	SGMJV-01A SGMAV-01A				
			Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053	HF-KP13 HF-MP13 HC-KFS13 HC-MFS13				
			OMRON Corp.		R88M-W03	R88M-W05	R88M-W10				
	3	MC-BKH06-231-00	Sanyo Denki Co., Ltd.	P30B04xxx (P Series)							
			Sanyo Denki Co., Ltd.	PBM423xxx 103F55xx							
	4	MC-BKH06-250-00	Oriental Motor Co., Ltd.	AS46, ASC46 UPK54x, PK54x CSK54x, CFK54x UMK24x, CSK24x PK24x							
			Sanyo Denki Co., Ltd.	PBM603xx PBM604xx 103F78xx							
			Oriental Motor Co., Ltd.	AS66, ASC66 UPK56x, UFK56x PK56x, CSK56x CFK56x							
	MCH09	1	MC-BKH09-145-00	Panasonic Co., Ltd.			MSMD5A	MSMD01			
		2	MC-BKH09-146-00	Yaskawa Electric Corp.			SGMJV-A5A SGMAV-A5A	SGMJV-01A SGMAV-01A			
				Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053	HF-KP13 HF-MP13 HC-KFS13 HC-MFS13			
OMRON Corp.					R88M-W05	R88M-W10					
3		MC-BKH09-170-00	Yaskawa Electric Corp.					SGMJV-02A SGMAV-02A	SGMJV-04A SGMAV-04A		
			Mitsubishi Electric Corp.					HF-KP23 HF-MP23 HC-KFS23 HC-MFS23	HF-KP43 HF-MP43 HC-KFS43 HC-MFS43		
4		MC-BKH09-170-01	OMRON Corp.					R88M-W20	R88M-W40		
			Sanyo Denki Co., Ltd.	P30B06xxx (P Series)							
			Panasonic Co., Ltd.				MSMD02 MSMA02	MSMD04 MSMA04			
5		MC-BKH09-231-00	Sanyo Denki Co., Ltd.	PBM423xxx 103F55xx							
			Oriental Motor Co., Ltd.	AS46, ASC46 UPK54x, PK54x CSK54x, CFK54x UMK24x, CSK24x PK24x							
6		MC-BKH09-250-00	Sanyo Denki Co., Ltd.	PBM603xx PBM604xx 103F78xx							
	Oriental Motor Co., Ltd.		AS66, ASC66 UPK56x, UFK56x PK56x, CSK56x CFK56x								
MCH10	1	MC-BKH10-170-00	Yaskawa Electric Corp.					SGMJV-02A SGMAV-02A	SGMJV-04A SGMAV-04A		
			Mitsubishi Electric Corp.					HF-KP23 HF-MP23 HC-KFS23 HC-MFS23	HF-KP43 HF-MP43 HC-KFS43 HC-MFS43		
			OMRON Corp.					R88M-W20	R88M-W40		
	2	MC-BKH10-170-01	Panasonic Co., Ltd.				MSMD02 MSMA02	MSMD04 MSMA04			
	3	MC-BKH10-190-00	Mitsubishi Electric Corp.						HC-KFS73 HC-MFS73 HF-KP73 HF-MP73		
	4	MC-BKH10-190-01	Sanyo Denki Co., Ltd.	P50B07xxx (P Series)							
			Sanyo Denki Co., Ltd.	PBM603xx PBM604xx 103F78xx							
	5	MC-BKH10-250-00	Oriental Motor Co., Ltd.	AS66, ASC66 UPK56x, PK56x CSK56x, CFK56x UMK56x, UFK56x							
			Oriental Motor Co., Ltd.	AS98, ASC98 UPK59x, PK59x CSK59x, CFK59x UMK59x, UFK59x							
	6	MC-BKH10-270-00	Oriental Motor Co., Ltd.								

ToughCarrier™



4.1	Features	98
4.2	Classification and Series.....	98
4.3	Accessories	100
4.4	Selection of Toughcarrier	
4.4.1	Selection Procedure for Toughcarrier.....	101
4.4.2	Stroke and Lead.....	102
4.4.3	Reference Number Coding and Accuracy Grade	103
4.4.4	Maximum Speed	104
4.4.5	Rigidity	106
4.4.6	Basic Load Rating	107
4.4.7	Estimation of Life Expectancy	108
4.4.8	Example of Life Estimation	110
4.5	TCH Series Dimension Table of Standard Products	
4.5.1	TCH06 Series.....	114
4.5.2	TCH09 Series	116
4.5.3	TCH10 Series.....	118
4.6	Accessory Specifications	
4.6.1	Sensor Unit	120
4.6.2	Cover Unit	121
4.6.3	Motor Bracket	124
4.7	Motor Bracket Compatibility Table.....	133
4.8	Sensor Rail and Top Cover Unit Combination Table	134
4.9	Toughcarrier High-Thrust Series.....	137

ToughCarrier™

4.1 Features

Greatly improved load capacity due to switching of rolling elements to rollers. Mounting dimensions are compatible with those of the MCH Series, allowing substitution.

1 Light weight and compact design

Taking into account part composition and rigidity, the cross sections of the rail and slider are the same as MCH series.

2 Superb rust-preventive ability

Low-temperature chrome plating comes standard.

3 All-in-one structure


- The all-in-one structure integrates a ball screw, a linear guide and a support unit into a single structure to significantly reduce design time.
- The bottom and one side of the rail are datum surfaces to facilitate highly accurate installation. Models with pin holes are also available as standard.
- Immediate operation after installation and run-in is possible due to pre-packed grease.
- A wide selection of ball screw leads are available.

4 Long-term maintenance-free operation

Use of NSK K1 lubrication unit and grease maintains smooth lubricating performance for long periods.

5 Updated rolling elements


Rollers are installed as rolling elements for the first time anywhere.

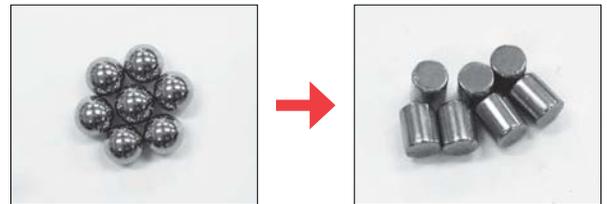


4.2 Classification and Series


Structure

Rolling elements: Balls
MCH Series




Rolling elements: Rollers
TCH Series




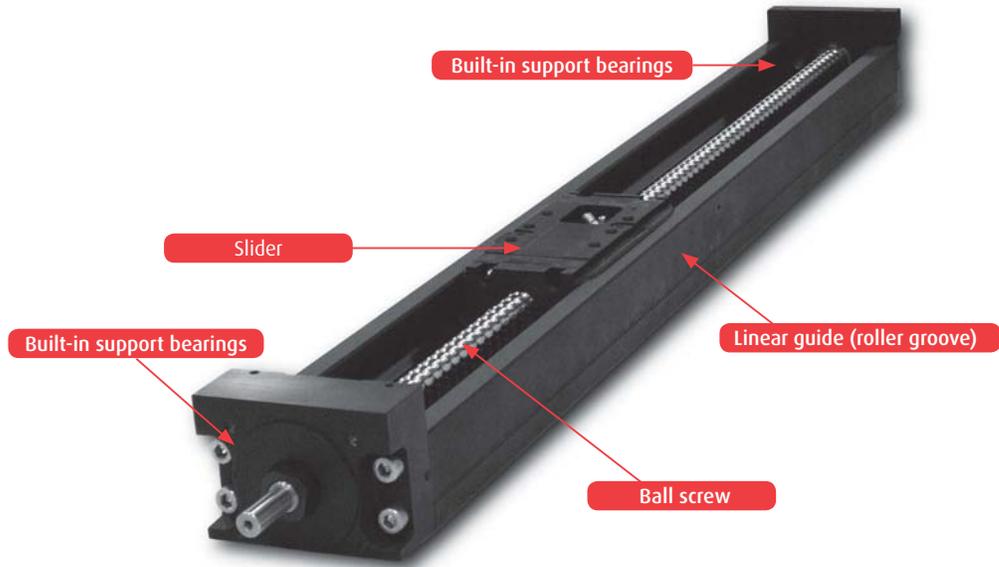

High rigidity, long life (N)

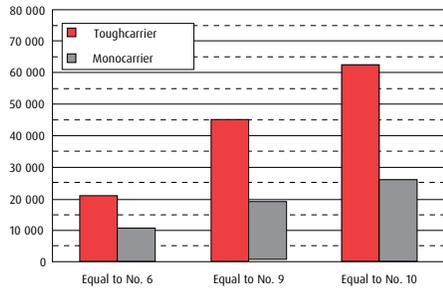


Twice the dynamic load rating and nine-times longer life compared to Monocarrier

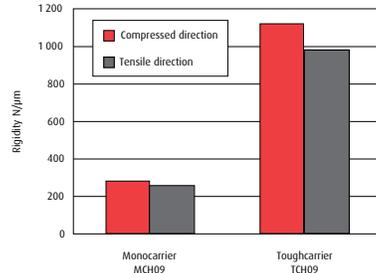


Four-times higher rigidity than Monocarrier

Cross-sections of TCH Series

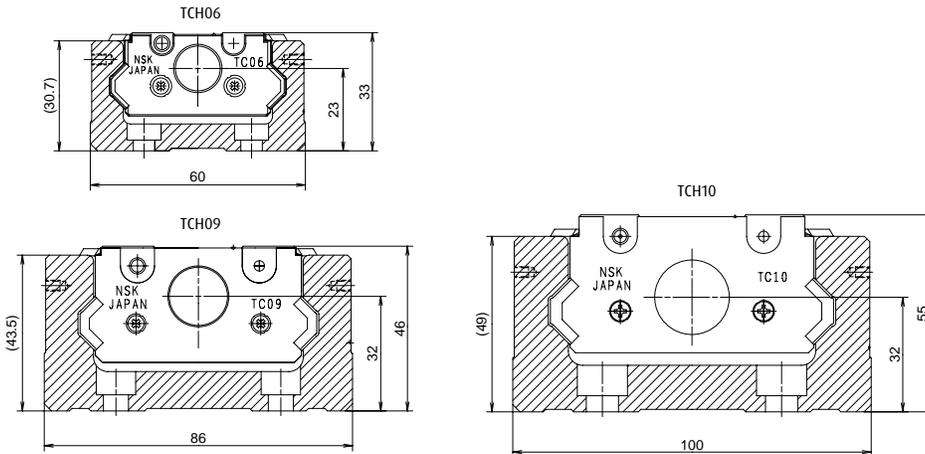

4.3 Accessories

Accessories for Toughcarrier

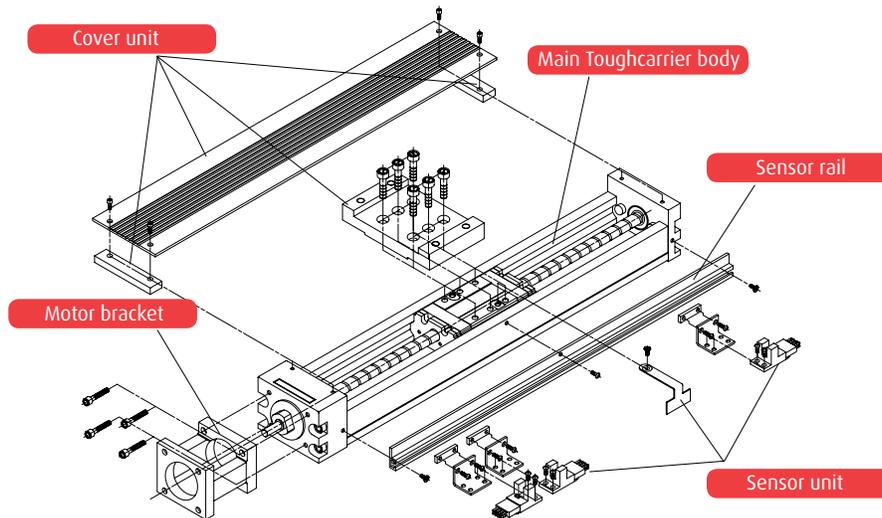

Assembly Example of Accessories

Sensor unit, cover unit, motor bracket and sensor rail are available as options for Toughcarrier. Contact NSK for other specifications other than those of NSK standard accessories.

1. Sensor unit:

- Photo sensor: Use of both OMRON EE-SX674 and EE-1001
- Proximity switch: Use of OMRON E2S-W13, E2S-W14

Available in a unit including sensor fitting clamps.


2. Sensor rail: This rail holds the sensor. Please order the appropriate rail according to the stroke.

3. Cover unit: This unit consists of a top cover and spacer plate.

4. Motor bracket: Brackets are available for a variety of models from different motor manufacturers. Please consult NSK when the mounting dimensions differ from your order.

4.4 Selection of Toughcarrier

4.4.1 Selection Procedure for Toughcarrier

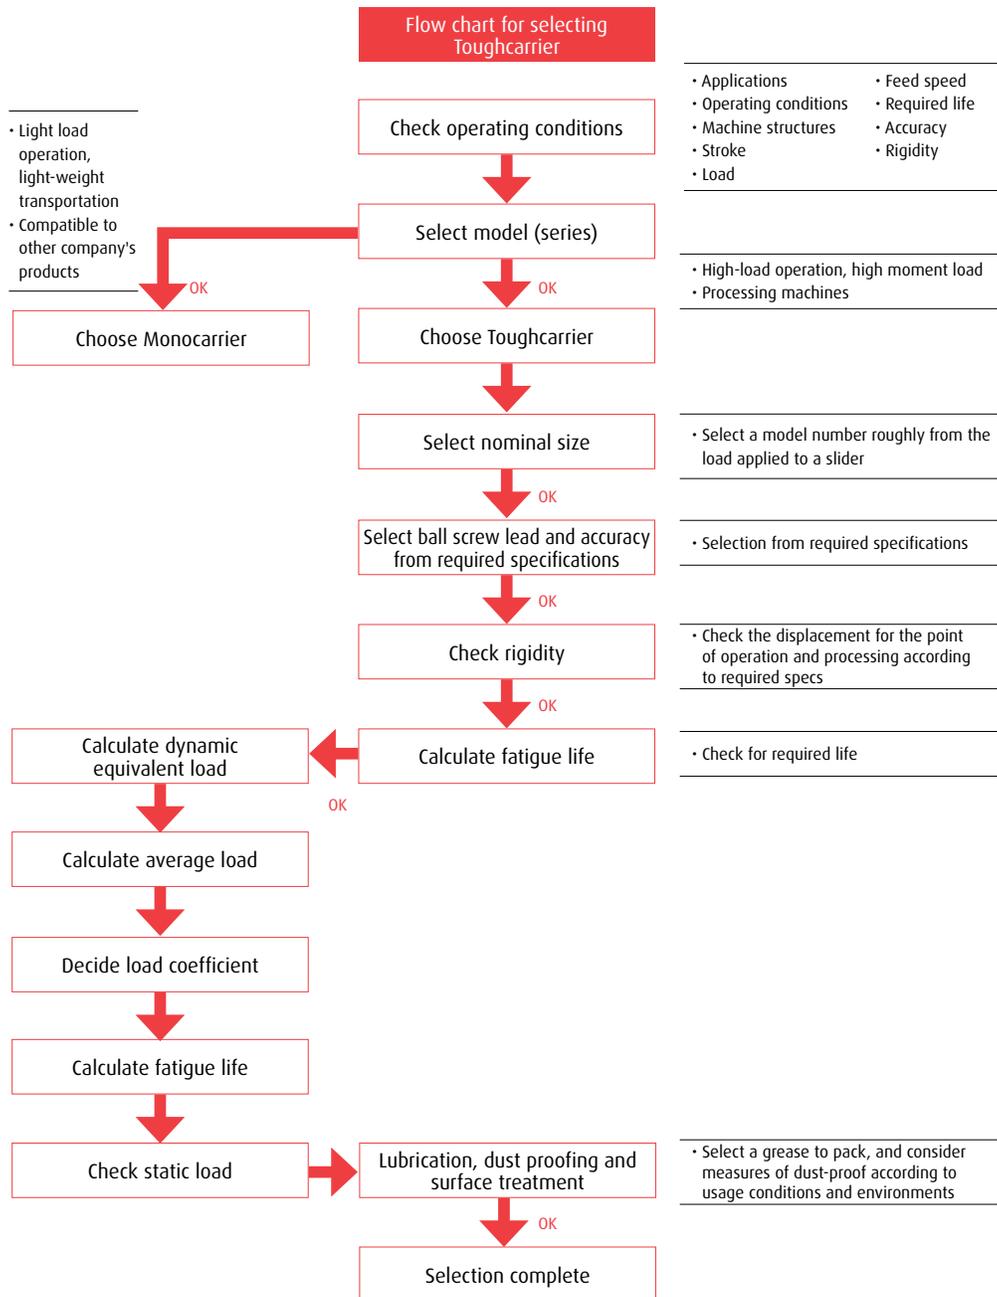

4.4.2 Stroke and Lead

Combinations of rail length and lead

TCH06

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm)	5	10	20	5	10	20	5	10	20	5	10	20
Rail length (mm)												
150	●	●	●				●	●				
200	●	●	●				●	●				
300	●	●	●	●	●		●	●		●	●	
400	●	●	●	●	●		●	●		●	●	
500	●	●	●	●	●		●	●		●	●	
600	●	●	●		●	●	●	●			●	

*20 mm lead for short sliders not available.

TCH09

Slider type	Standard slider						Short slider					
	Single slider			Double slider			Single slider			Double slider		
Lead (mm)	5	10	20	5	10	20	5	10	20	5	10	20
Rail length (mm)												
240	●	●	●				●	●	●			
340	●	●	●				●	●	●			
440	●	●	●	●	●		●	●	●	●	●	
540	●	●	●	●	●		●	●	●	●	●	
640	●	●	●	●	●		●	●	●	●	●	
740	●	●	●		●	●	●	●	●		●	●
840	●	●	●				●	●	●			
940	●	●	●		●	●	●	●	●		●	●

TCH10

Slider type	Standard slider				Short slider			
	Single slider		Double slider		Single slider		Double slider	
Lead (mm)	10	20	10	20	10	20	10	20
Rail length (mm)								
280	●	●			●	●		
380	●	●			●	●		
480	●	●			●	●		
580	●	●	●	●	●	●	●	●
680	●	●	●	●	●	●	●	●
780	●	●	●	●	●	●	●	●
880	●	●	●	●	●	●	●	●
980	●	●	●	●	●	●	●	●
1 080	●	●		●	●	●		●
1 180	●	●		●	●	●		●
1 280	●	●		●	●	●		●
1 380	●	●		●	●	●		●

Availability

Model No.	Lead (mm)	Slider	Rail length (mm)
TCH06	5, 10, 20	Single Double	600
TCH09	5, 10, 20	Single Double	940
TCH10	10, 20	Single Double	1 380

4.4.3 Reference Number Coding and Accuracy Grade

Reference number coding for TCH Series

Body

TC	H	06	030	H	10	K	0	0
TOUGH CARRIER	TYPE	NOMINAL SIZE	STROKE	ACCURACY GRADE	BALL SCREW LEAD	SLIDER SPECIFICATION	GREASE SPECIFICATION	NSK CONTROL NUMBER
TC: Toughcarrier	H: Standard S: With Accessories	Rail width, unit: 10 mm	Unit: 10 mm	H: High Grade P: Precision Grade	Unit: mm	K: Single slider D: Double slider A: Single short slider B: Double short slider	0: YS2 (standard)	0: Without Pin Holes 1: With Pin Holes

Special Specifications

TC	H	06	030	H	10	K	3	XXB
							SPECIAL SPECIFICATION	DESIGN SERIAL NUMBER
							3: Toughcarrier for special specs 5: Toughcarrier high-thrust series*	

Reference Number for Accessories

TC	SRH	XX	00
TOUGH CARRIER	SENSOR UNIT	NOMINAL SIZE	CONTROL NUMBER
TC: Toughcarrier		06 09 10	

TC	HV	XX	XXX	K	00
TOUGH CARRIER	COVER UNIT	NOMINAL SIZE	STROKE (NOMINAL)	SLIDER SPECS	CONTROL NUMBER
TC: Toughcarrier		06 09 10		Refer to the body reference no.	

TC	SRL	X	XXXX
TOUGH CARRIER	SENSOR RAIL	NOMINAL SIZE	BODY RAIL LENGTH
TC: Toughcarrier		6: 06 9: 09 1: 10	

TC	BKH	XX	XXX	00
TOUGH CARRIER	MOTOR BRACKET	NOMINAL SIZE	DIMENSION FOR MOTOR MOUNTING	CONTROL NUMBER
TC: Toughcarrier		06 09 10		

Accuracy grade

Grade		High grade (H grade)		Precision grade (P grade)			
Stroke (mm)	Repeatability	Running parallelism (vertical)	Backlash	Repeatability	Positioning accuracy	Running parallelism (vertical)	Backlash
~ 200	±10	14	20 or less	±3	20	8	3 or less
~ 400		16			25	10	
~ 600		20			30	12	
~ 700		23			35	15	
~ 1 000		30			40	20	
~ 1 200							

High and precision grades are available for accuracy grade. Consult NSK for your requirements.

Unit: μm

4.4.4 Maximum Speed

Maximum speed (standard slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speed in the table below.

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)	
TCH06 Single slider	50	5	150	250	
	100		200		
	200		300		
	300		400		
	400		500		
	500		600		
	50	10	150	500	
	100		200		
	200		300		
	300		400		
	400		500		
	500		600		
	50	20	150	1 000	
	100		200		
	200		300		
300	400				
400	500				
500	600				
TCH06 Double slider	130	5	300	250	
	230		400		
	330		500		
	130	10	300	500	
	230		400		
	330		500		
430	20	600	1 000		
430		600			
TCH09 Single slider	100	5	240	250	
	200		340		
	300		440		
	400		540		
	500		640		
	600		740		
	700		840		
	800		940		210
	100		10		240
	200	340			
	300	440			
	400	540			
	500	640			
	600	740			
	700	840			
	800	940		410	
	100	20		240	1 000
	200		340		
	300		440		
	400		540		
	500		640		
600	740				
700	840				
800	940		820		

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)	
TCH09 Double slider	170	5	440	250	
	270		540		
	370		640		
	170	10	440	500	
	270		540		
	370		640		
470	740				
670	940				
470	20	740	1 000		
670		940			
TCH10 Single slider	100	10	280	500	
	200		380		
	300		480		
	400		580		
	500		680		
	600		780		
	700		880		
	800		980		
	900		1 080		440
	1 000		1 180		360
	1 100	1 280	300		
	1 200	1 380	250		
	100	20	280	1 000	
	200		380		
	300		480		
400	580				
500	680				
600	780				
700	880				
800	980				
900	1 080		870		
1 000	1 180		720		
1 100	1 280	600			
1 200	1 380	510			
270	10	580	500		
370		680			
470		780			
570		880			
670		980			
270		20		580	1 000
370	680				
470	780				
570	880				
670	980				
770	1 080				
870	1 180		930		
970	1 280		780		
1 070	1 380		650		

Note: If you need to operate the Toughcarrier near the critical speed or in excess of the maximum speed in the table, please consult NSK.

Maximum speed (short slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speed in the table below.


	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)
TCH06 Single slider	70	5	150	250
	120		200	
	220		300	
	320		400	
	420		500	
	520		600	
TCH06 Double slider	70	10	150	500
	120		200	
	220		300	
	320		400	
	420		500	
	520		600	
TCH06 Double slider	170	5	300	250
	270		400	
	370		500	
	170	10	300	500
	270		400	
	470		600	
TCH09 Single slider	140	5	240	250
	240		340	
	340		440	
	440		540	
	540		640	
	740		840	
	840	940	240	
	140	10	240	500
	240		340	
	340		440	
	440		540	
	540		640	
740	840			
840	940	480		
140	20	240	1 000	
240		340		
340		440		
440		540		
540		640		
740		840		
840	940	960		
			760	

	Stroke (nominal)	Ball screw lead (mm)	Body rail length L_2 (mm)	Maximum speed (mm/s)	
TCH09 Double slider	250	5	440	250	
	350		540		
	450		640		
	250	10	440	500	
	350		540		
	450		640		
550	740				
750	940	460			
550	20	740	1 000		
750		940			
TCH10 Single slider	160	10	280	500	
	260		380		
	360		480		
	460		580		
	560		680		
	660		780		
	760		880		
	860		980		490
	960		1 080		400
	1 060		1 180		330
	1 160		1 280		280
	1 260		1 380		240
160	20	280	1 000		
260		380			
360		480			
460		580			
560		680			
660		780			
760		880			
860		980		980	
960		1 080		800	
1 060		1 180		660	
1 160		1 280		560	
1 260		1 380		480	
360	10	580	500		
460		680			
560		780			
660		880			
760		980			
860		1 080			
360	20	580	1 000		
460		680			
560		780			
660		880			
760		980			
860		1 080			
960	1 180	800			
1 060	1 280	660			
1 160	1 380	560			

Note: If you need to operate the Toughcarrier near the critical speed or in excess of the maximum speed in the table, please consult NSK.

4.4.5 Rigidity

Rigidity of rail

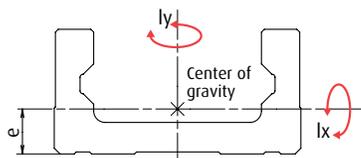


Model no.	Geometrical moment of inertia $\times 10^4$ (mm ⁴)		Center of gravity (mm)	Mass (kg/100mm)
	I_x	I_y	e	w
TCH06	6.47	36.2	10.6	0.60
TCH09	28.40	162.0	15.7	1.32
TCH10	46.00	283.0	17.2	1.73

Rigidity in radial direction


TCH06 standard slider

Rigidity in radial direction

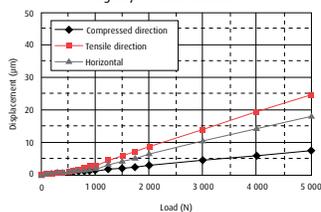


TCH09 standard slider

Rigidity in radial direction

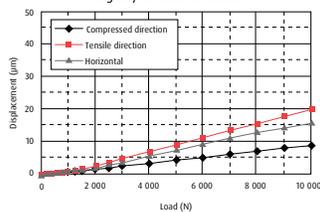


TCH10 standard slider

Rigidity in radial direction

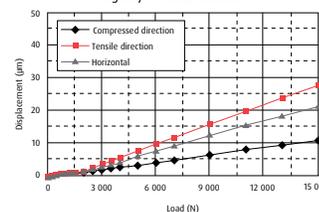


TCH06 short slider

Rigidity in radial direction

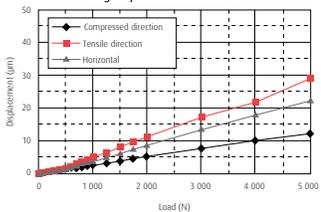


TCH09 short slider

Rigidity in radial direction

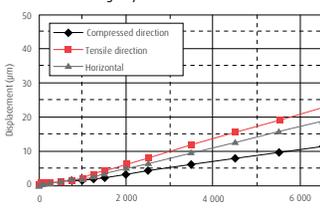

TCH10 short slider


Rigidity in radial direction

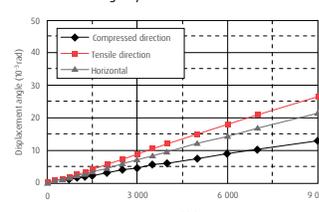

Moment in radial direction


TCH06 standard slider

Moment rigidity

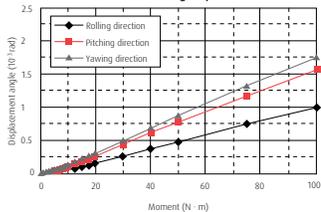


TCH09 standard slider

Moment rigidity

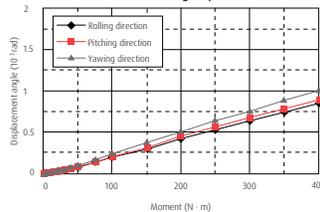


TCH10 standard slider

Moment rigidity

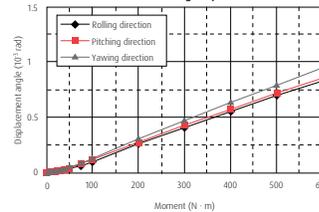


TCH06 short slider

Moment rigidity

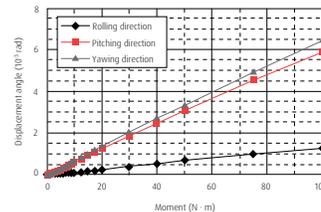


TCH09 short slider

Moment rigidity

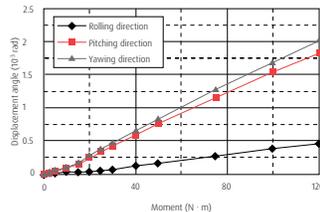

TCH10 short slider

Moment rigidity

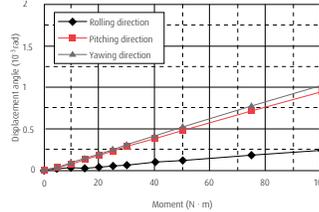

4.4.6 Basic Load Rating

Basic Load Rating for TCH series

Standard slider

Model no.	Lead l (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)		Support bearing limit load (N)
			Ball screw C_a	Linear guide C	Support bearings C_a	Ball screw C_{0a}	Linear guide C_0	
TCH06	5	$\varnothing 12$	3 760	20 900	6 600	6 310	45 000	2 700
	10		2 260			3 780		
	20		2 260			3 780		
TCH09	5	$\varnothing 15$	7 100	44 900	8 800	13 000	96 900	5 090
	10		7 060			12 700		
	20		4 560			7 750		
TCH10	10	$\varnothing 20$	10 900	62 400	9 600	21 700	132 000	5 670
	10		7 060			12 700		
	20		7 060			12 700		

Short slider

Model no.	Lead l (mm)	Shaft dia. d (mm)	Basic dynamic load rating (N)			Basic static load rating (N)		Support bearing limit load (N)
			Ball screw C_a	Linear guide C	Support bearings C_a	Ball screw C_{0a}	Linear guide C_0	
TCH06	5	$\varnothing 12$	3 760	12 200	6 600	6 310	22 500	2 700
	10		2 260			3 780		
	5		7 100			13 000		
TCH09	10	$\varnothing 15$	7 060	27 900	8 800	12 700	52 500	5 090
	20		4 560			7 750		
	10		10 900			21 700		
TCH10	20	$\varnothing 20$	7 060	38 700	9 600	12 700	71 500	5 670
	10		7 060			12 700		

- Basic dynamic and static load ratings indicate values for one slider.
- Basic dynamic load rating of linear guide is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball mounting surface.
- Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Toughcarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue.
- Basic dynamic load rating of support bearings is load that allows 1 million revolutions under the same condition.
- Basic static load rating is load that results in combined permanent deformations at contact points of rolling elements and rolling surfaces of respective parts at a diameter of 0.01%.


Basic static moment load of linear guide

Standard slider

Model no.	Slider	Basic static moment load (N·m)		
		Rolling M_{Ro}	Pitching M_{Po}	Yawing M_{Yo}
TCH06	Single	800	340	340
TCH09	Single	2 510	1 340	1 340
TCH10	Single	3 980	2 150	2 150

Short slider

Model no.	Slider	Basic static moment load (N·m)		
		Rolling M_{Ro}	Pitching M_{Po}	Yawing M_{Yo}
TCH06	Single	400	85	85
TCH09	Single	1 350	390	390
TCH10	Single	2 150	630	630



M_{Ro} : Rolling moment
 M_{Po} : Pitching moment
 M_{Yo} : Yawing moment

4.4.7 Estimation of Life Expectancy

(1) Life of linear guide for Toughcarrier

Study the load to be applied to the linear guide of Toughcarrier. The equivalent load (Fe) is determined by substituting the load for equation ① ② ②' for tightly coupled double slider type.

- For single slider

$$F_e = Y_H \cdot F_H + Y_V \cdot F_V + Y_R \cdot \epsilon_R \cdot M_R + Y_P \cdot \epsilon_P \cdot M_P + Y_Y \cdot \epsilon_Y \cdot M_Y \dots\dots\dots \textcircled{1}$$

- For double slider

For double sliders, calculation of the load applied to each slider is required.

Dynamic equivalent load is only for rolling moment.

This is the same procedure as for linear guide selection where two sliders are installed in a rail. Check the mean load for each slider, and calculate shortest life becomes the life of linear guide.

When lateral direction (F_{HA}) and vertical direction (F_{VA}) loads are applied to the center of the coordinate,

$$F_{HA} = \frac{F_H}{2} + \frac{M_V}{\ell}, \quad F_{VA} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

$$F_{HB} = \frac{F_H}{2} - \frac{M_V}{\ell}, \quad F_{VB} = \frac{F_V}{2} - \frac{M_P}{\ell}$$

[Slider A]

$$F_{eA} = Y_H \cdot F_{HA} + Y_V \cdot F_{VA} + Y_R \cdot \epsilon_R \cdot \frac{M_R}{2} \dots\dots\dots \textcircled{2}$$

$$= Y_H \left(\frac{F_H}{2} + \frac{M_V}{\ell} \right) + Y_V \left(\frac{F_V}{2} + \frac{M_P}{\ell} \right) + Y_R \cdot \epsilon_R \cdot \frac{M_R}{2}$$

[Slider B]



$$F_{eB} = Y_H \cdot F_{HB} + Y_V \cdot F_{VB} + Y_R \cdot \epsilon_R \cdot \frac{M_R}{2} \dots\dots\dots \textcircled{2'}$$

$$= Y_H \left(\frac{F_H}{2} - \frac{M_V}{\ell} \right) + Y_V \left(\frac{F_V}{2} - \frac{M_P}{\ell} \right) + Y_R \cdot \epsilon_R \cdot \frac{M_R}{2}$$

- F_H : Lateral direction load acting on the slider (N)
- F_V : Vertical direction load acting on the slider (N)
- M_R : Rolling moment acting on the slider (N · m)
- M_P : Pitching moment acting on the slider (N · m)
- M_Y : Yawing moment acting on the slider (N · m)
- ε_R : Dynamic equivalent coefficient to rolling moment
- ε_P : Dynamic equivalent coefficient to pitching moment
- ε_Y : Dynamic equivalent coefficient to yawing moment
- ℓ : Sliders span

*For dynamic equivalent coefficient, see table on facing page.
Y_H, Y_V, Y_R, Y_P, Y_Y: 1.0 or 0.5

At equations ① ② and ②' for obtaining equivalent load Fe, the maximum value of Y in the values for each equation is assumed to be 1.0. For others it is assumed to be 0.5.

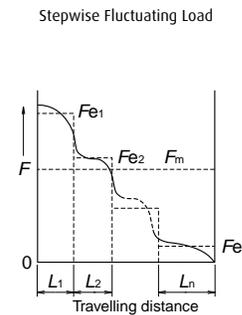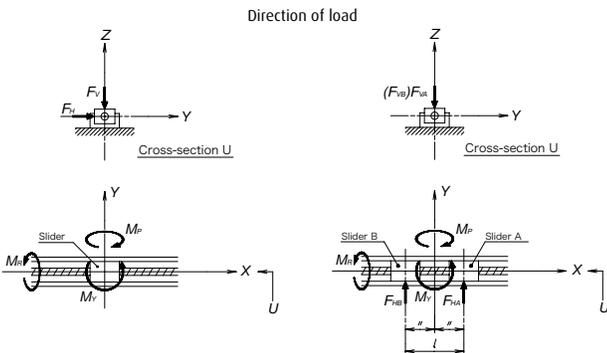

If the loads acting on the slider fluctuate (in general, M_p and M_v may fluctuate with the acceleration/deceleration of slider), the mean effective load is determined by Eq. (3).

Travelling distance under the equivalent load F_{e1} : L_1

Travelling distance under the equivalent load F_{e2} : L_2

Travelling distance under the equivalent load F_{en} : L_n

Mean effective load F_m is calculated by the following equation.

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^{10} \cdot L_1 + F_{e2}^{10} \cdot L_2 + \dots + F_{en}^{10} \cdot L_n)} \quad (3)$$

F_m : Mean effective load of fluctuating loads (N)

L : Total travelling distance (mm)

The life of linear guide for Toughcarrier is determined by Eq. (4).

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}} \quad (4)$$

L : Life of linear guide (km)

C : Basic dynamic load rating of linear guide (N)

F_m : Mean effective load acting on linear guide (N)

f_w : Load coefficient

When the estimated life does not meet the required life, the life of the linear guide is calculated again after following measures are taken,

1: Change from single slider type to double slider type.

2: Use a larger Toughcarrier.

(2) Life of Ball Screw (Support Bearing)

The mean effective load is determined from the axial load.

Axial direction mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + \dots + F_{en}^3 \cdot L_n)} \quad (5)$$

The life of ball screw is determined by Eq. (6).

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \quad (6)$$

ℓ : Ball screw lead (mm)

L : Life of ball screw (mm)

C_a : Basic dynamic load rating of ball screw (N)

F_m : Mean effective load acting on ball screw (N)

f_w : Load factor

The life of a support bearing is calculated by Eq. (6). If the life of ball screw/support bearing does not meet the required life, use a larger size Toughcarrier. After applying the calculations mentioned above, selection of the Toughcarrier is completed.

Value of load factor

Operating conditions	Load factor f_w
At smooth operation with no mechanical shock	1.0 ~ 1.2
At normal operation	1.2 ~ 1.5
At operation with mechanical shock and vibration	1.5 ~ 3.0

*When the bottom of rail is not fastened, the load factor is 1.5 or greater.


Dynamic Equivalent Coefficient

	TCH06			TCH09			TCH10		
	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing	Rolling	Pitching	Yawing
Standard slider	56	93	93	39	51	51	33	44	44
Short slider	56	186	186	39	95	95	33	80	80

4.4.8 Example of Life Estimation

Example of life estimation for Toughcarrier

Example-1

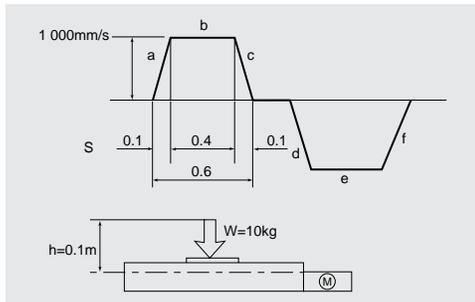

1 Use condition

- Stroke : 500 mm
- Maximum speed : 1 000 mm/s
- Load mass : W = 10 kg
- Acceleration : 9.80 m/s²
- Setting position : Horizontal
- Operating profile : See above figure

2 Selection of model number (interim selection)

First, select a greater ball screw lead as the maximum speed is 1 000 mm/s. The interim selection is TCH06050H20K00, a single slider specification TCH06 that has 500 mm stroke, as the stroke is 500 mm.

3 Calculation

3-1 Linear guide

3-1-1 Fatigue Life

Multiply the result of ① by the dynamic equivalent coefficient to convert the load volume. From operation profile in the above figure, the acceleration is 10 m/s².

i) Constant speed

$$Fe_1 = Y_V \cdot F_V = Y_V \cdot W \cdot g$$

$$= 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$$

ii) Accelerating

$$Fe_2 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_P = Y_V \cdot W \cdot g + Y_P \cdot \epsilon_P \cdot h \cdot W \cdot \alpha$$

$$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10 = 979 \text{ N}$$

iii) Decelerating

$$Fe_3 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_P$$

$$= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10 = 979 \text{ N}$$

Mean effective load F_m

$$F_m = \sqrt[10]{\frac{1}{L} (Fe_1^{10} \cdot L_1 + Fe_2^{10} \cdot L_2 + Fe_3^{10} \cdot L_3)}$$

$$= \sqrt[10]{\frac{1}{500} (98^{10} \cdot 400 + 979^{10} \cdot 50 + 979^{10} \cdot 50)}$$

$$= 605 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^3$$

$$= 50 \times \left(\frac{20\,900}{1.2 \cdot 605} \right)^3$$

$$= 3.65 \times 10^6 \text{ km}$$

3-2 Static Safety Factor

Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{Fe} = \frac{C_0}{Fe_2} = \frac{45\,000}{979} = 45.9$$

3-2 Ball Screw

3-2-1 Fatigue Life

Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

By the process above,

i) Constant speed

$$Fe_1 = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98 \text{ N}$$

ii) Accelerating

$$Fe_2 = Fe_1 + W \cdot \alpha = 0.98 + 10 \cdot 10 = 101 \text{ N}$$

iii) Decelerating

$$Fe_3 = Fe_1 + W \cdot \alpha = 0.98 - 10 \cdot 10 = 99 \text{ N}$$

Axial mean effective load

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{500} (0.98^3 \cdot 400 + 101^3 \cdot 50 + 99^3 \cdot 50)}$$

$$= 59 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{2\,260}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 6.50 \times 10^5 \text{ km}$$

3-2-2 Static Safety Factor

Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{Fe} = \frac{C_{0a}}{Fe_2} = \frac{3\,780}{101} = 37.4$$

3-3 Support Bearings

3-3-1 Fatigue Life

Use the axial load $F_m = 59 \text{ N}$ that is the result of the calculation in 3-2-1, above.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{6\,600}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 1.62 \times 10^7 \text{ km}$$

3-3-2 Static Safety Factor

Divide the limit load by the maximum axial load.


$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,700}{101} = 26.7$$

3-4 Result

TCH06050H20K00	Linear guide	Ball screw	Support bearings
Fatigue life	$3.65 \times 10^6 \text{ km}$	$6.50 \times 10^7 \text{ km}$	$1.62 \times 10^7 \text{ km}$
Static safety factor	45.9	37.4	26.7


Example of life estimation

Example-2

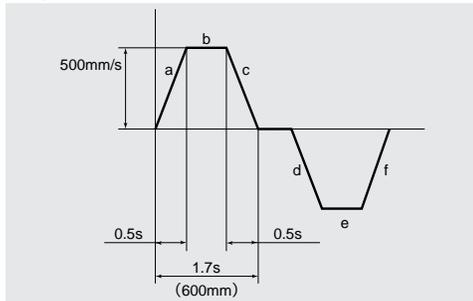

1 Use condition

Stroke : 600 mm
 Maximum speed : 500 mm/s
 Load mass : $W = 20 \text{ kg}$
 Acceleration : 9.8 m/s^2
 Setting position : Vertical
 Operating profile : See above figure



2 Selection of model number (interim selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s. The interim selection is TCH09067H10D00 (double slider specification) from the stroke and the vertical setting position.

3 Calculation

3-1 Linear Guide

3-1-1 Fatigue Life

Multiply the result of ② and ② by the dynamic equivalent coefficient to convert the load volume. From operation profile in the above figure, the acceleration is 1 m/s^2 . The interim slider span is 0.13.

Under this condition,

$$F_H = 0, F_V = 0, M_R = 0$$

in Eq., and both sliders have the same load with different direction.

i) Constant speed

$$F_{e1} = \gamma_H \cdot \frac{M_x}{\ell} + \gamma_V \cdot \frac{M_p}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot 9.8}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot 9.8}{0.13}$$

$$= 302 \text{ N}$$

ii) Accelerating

$$F_{e2} = \gamma_H \cdot \frac{M_x}{\ell} + \gamma_V \cdot \frac{M_p}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 + 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 + 1.0)}{0.13}$$

$$= 333 \text{ N}$$

iii) Decelerating

$$F_{e3} = \gamma_H \cdot \frac{M_x}{\ell} + \gamma_V \cdot \frac{M_p}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 - 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 - 1.0)}{0.13}$$

$$= 271 \text{ N}$$

Mean effective load F_m

$$F_m = \sqrt[10]{\frac{1}{L} (F_{e1}^{10} \cdot L_1 + F_{e2}^{10} \cdot L_2 + F_{e3}^{10} \cdot L_3)}$$

$$= \sqrt[10]{\frac{1}{600} (302^{10} \cdot 350 + 333^{10} \cdot 125 + 271^{10} \cdot 125)}$$

$$= 304 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^3$$

$$= 50 \times \left(\frac{44\,900}{1.2 \cdot 304} \right)^3$$

$$= 4.63 \times 10^8 \text{ km}$$

3-1-2 Static Safety Factor

Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{96\,900}{333} = 290$$

3-2 Ball Screw

3-2-1 Fatigue Life

Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

i) Constant speed

$$F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$$

ii) Accelerating

$$F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1.0 = 216 \text{ N}$$

iii) Decelerating

$$F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1.0 = 176 \text{ N}$$

Axial mean effective load F_m

$$\begin{aligned}
 F_m &= \sqrt[3]{\frac{1}{L} (F_{e_1}^3 \cdot L_1 + F_{e_2}^3 \cdot L_2 + F_{e_3}^3 \cdot L_3)} \\
 &= \sqrt[3]{\frac{1}{600} (196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125)} \\
 &= 197 \text{ N} \\
 L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \\
 &= 10 \times \left(\frac{7\,060}{1.2 \cdot 197} \right)^3 \times 10^6 \\
 &= 2.66 \times 10^5 \text{ km}
 \end{aligned}$$

3-2-2 Static Safety Factor

Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e_2}} = \frac{12\,700}{216} = 58.7$$

3-3 Support Bearings

3-3-1 Fatigue Life

Use the axial load $F_m = 197 \text{ N}$ that is the result of the calculation in 3-2-1, above.

$$\begin{aligned}
 L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \\
 &= 10 \times \left(\frac{8\,800}{1.2 \cdot 197} \right)^3 \times 10^6 \\
 &= 5.15 \times 10^5 \text{ km}
 \end{aligned}$$

3-3-2 Static Safety Factor

Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e_2}} = \frac{5\,090}{216} = 23.5$$


3-4 Result

TCH09067H10D00	Linear guide	Ball screw	Support bearings
Fatigue life	4.63 x 10 ⁸ km	2.66 x 10 ⁵ km	5.15 x 10 ⁵ km
Static safety factor	290	58.7	23.5

4.5 TCH Series Dimension Table of Standard Products

4.5.1 TCH06 series

TCH06 Standard Slider Specifications (with pin holes)

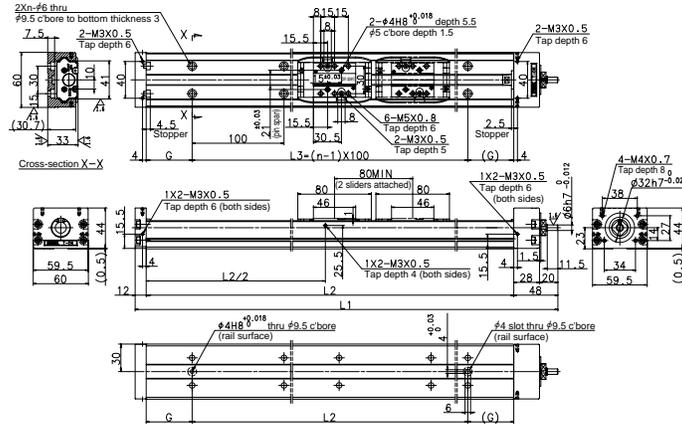


Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH06	Single standard slider	5	1.0 ~ 6.0	1.8 ~ 9.0
		10	1.1 ~ 7.2	2.0 ~ 10.6
		20	1.6 ~ 9.5	2.2 ~ 12.9
	Double standard slider	5	1.2 ~ 7.2	2.0 ~ 10.1
		10	1.2 ~ 9.5	2.2 ~ 12.9
		20	1.8 ~ 14.1	2.8 ~ 17.5

TCH06 Short Slider Specifications (with pin holes)

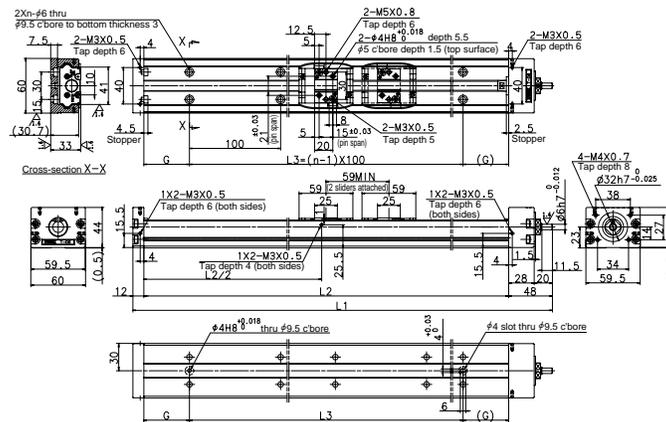

Toughcarrier dynamic torque specifications

Unit: N · cm

Model no.	Slider specifications	Ball screw lead (mm)	Accuracy grade	
			High grade	Precision grade
TCH06	Single short slider	5	0.8 ~ 5.9	1.8 ~ 8.9
		10	1.0 ~ 7.0	2.0 ~ 10.4
		5	1.0 ~ 7.0	2.0 ~ 10.0
	Double short slider	10	1.2 ~ 9.2	2.2 ~ 12.6

TCH06 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06005H05K00 (01)			5						2.94	
* TCH06005H10K00 (01)	50	63	10	210	150	100	25	2	3.38	2.2
* TCH06005H20K00 (01)			20						5.10	
* TCH06010H05K00 (01)			5						3.74	
* TCH06010H10K00 (01)	100	113	10	260	200	100	50	2	4.18	2.5
* TCH06010H20K00 (01)			20						5.90	
TCH06020H05K00 (01)			5						5.34	
TCH06020H10K00 (01)	200	213	10	360	300	200	50	3	5.78	3.3
TCH06020H20K00 (01)			20						7.50	
TCH06030H05K00 (01)			5						6.84	
TCH06030H10K00 (01)	300	313	10	460	400	300	50	4	7.28	3.9
TCH06030H20K00 (01)			20						9.00	
TCH06040H05K00 (01)			5						8.44	
TCH06040H10K00 (01)	400	413	10	560	500	400	50	5	8.88	4.6
TCH06040H20K00 (01)			20						10.60	
TCH06050H05K00 (01)			5						10.10	
TCH06050H10K00 (01)	500	513	10	660	600	500	50	6	10.50	5.3
TCH06050H20K00 (01)			20						12.20	

TCH06 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06013H05D00 (01)	130	134	5	360	300	200	50	3	5.47	3.6
* TCH06013H10D00 (01)			10						6.32	
* TCH06023H05D00 (01)	230	234	5	460	400	300	50	4	7.06	4.2
* TCH06023H10D00 (01)			10						7.91	
* TCH06033H05D00 (01)	330	334	5	560	500	400	50	5	8.64	4.9
* TCH06033H10D00 (01)			10						9.49	
TCH06043H10D00 (01)	430	434	10	660	600	500	50	6	11.08	5.6
TCH06043H20D00 (01)			20						14.40	

TCH06 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06007H05A00 (01)	70	82	5	210	150	100	25	2	2.87	2.1
* TCH06007H10A00 (01)			10						3.06	
* TCH06012H05A00 (01)	120	132	5	260	200	100	50	2	3.67	2.4
* TCH06012H10A00 (01)			10						3.86	
TCH06022H05A00 (01)	220	232	5	360	300	200	50	3	5.27	3.2
TCH06022H10A00 (01)			10						5.46	
TCH06032H05A00 (01)	320	332	5	460	400	300	50	4	6.77	3.8
TCH06032H10A00 (01)			10						6.96	
TCH06042H05A00 (01)	420	432	5	560	500	400	50	5	8.37	4.5
TCH06042H10A00 (01)			10						8.56	
TCH06052H05A00 (01)	520	532	5	660	600	500	50	6	9.97	5.2
TCH06052H10A00 (01)			10						10.20	

TCH06 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
* TCH06017H05B00 (01)	170	176	5	360	300	200	50	3	5.34	3.4
* TCH06017H10B00 (01)			10						5.81	
TCH06027H05B00 (01)	270	276	5	460	400	300	50	4	6.93	4.0
TCH06027H10B00 (01)			10						7.40	
TCH06037H05B00 (01)	370	376	5	560	500	400	50	5	8.51	4.7
TCH06037H10B00 (01)			10						8.98	
TCH06047H10B00 (01)	470	476	10	660	600	500	50	6	10.57	5.4

Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)	
				L ₁	L ₂	L ₃	G				
* TCH09010H05K00 (01)	100	108	5	320	240	100	70	2	9.13	6.5	
* TCH09010H10K00 (01)			10								11.0
* TCH09010H20K00 (01)			20								18.6
TCH09020H05K00 (01)	200	208	5	420	340	200	70	3	14.2	7.9	
TCH09020H10K00 (01)			10								16.0
TCH09020H20K00 (01)			20								23.6
TCH09030H05K00 (01)	300	308	5	520	440	300	70	4	18.1	9.4	
TCH09030H10K00 (01)			10								19.9
TCH09030H20K00 (01)			20								27.5
TCH09040H05K00 (01)	400	408	5	620	540	400	70	5	21.9	10.8	
TCH09040H10K00 (01)			10								23.8
TCH09040H20K00 (01)			20								31.4
TCH09050H05K00 (01)	500	508	5	720	640	500	70	6	25.9	12.3	
TCH09050H10K00 (01)			10								27.7
TCH09050H20K00 (01)			20								35.3
TCH09060H05K00 (01)	600	608	5	820	740	600	70	7	29.4	13.6	
TCH09060H10K00 (01)			10								31.3
TCH09060H20K00 (01)			20								38.9
TCH09070H05K00 (01)	700	708	5	920	840	700	70	8	33.5	15.0	
TCH09070H10K00 (01)			10								35.4
TCH09070H20K00 (01)			20								43.0
TCH09080H05K00 (01)	800	808	5	1 020	940	800	70	9	37.4	16.4	
TCH09080H10K00 (01)			10								39.3
TCH09080H20K00 (01)			20								46.9

TCH09 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)	
				L ₁	L ₂	L ₃	G				
* TCH09017H05D00 (01)	170	184	5	520	440	300	70	4	19.47	10.3	
* TCH09017H10D00 (01)			10								22.89
* TCH09027H05D00 (01)			5								23.35
* TCH09027H10D00 (01)	270	284	10	620	540	400	70	5	26.77	11.7	
TCH09037H05D00 (01)			5								27.22
TCH09037H10D00 (01)			10								30.64
TCH09047H10D00 (01)	370	384	5	720	640	500	70	6	34.55	13.2	
TCH09047H10D00 (01)			10								30.64
TCH09047H20D00 (01)			20								48.24
TCH09067H10D00 (01)	470	484	10	820	740	600	70	7	42.27	14.5	
TCH09067H10D00 (01)			20								48.24
TCH09067H20D00 (01)			10								42.27
TCH09067H20D00 (01)	670	684	20	1 020	940	800	70	9	55.96	17.3	

TCH09 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)	
				L ₁	L ₂	L ₃	G				
* TCH09014H05A00 (01)	140	146	5	320	240	100	70	2	8.9	6.1	
* TCH09014H10A00 (01)			10								10.1
* TCH09014H20A00 (01)			20								14.6
TCH09024H05A00 (01)	240	246	5	420	340	200	70	3	13.9	7.5	
TCH09024H10A00 (01)			10								15.1
TCH09024H20A00 (01)			20								19.6
TCH09034H05A00 (01)	340	346	5	520	440	300	70	4	17.8	9.0	
TCH09034H10A00 (01)			10								18.9
TCH09034H20A00 (01)			20								23.5
TCH09044H05A00 (01)	440	446	5	620	540	400	70	5	21.7	10.4	
TCH09044H10A00 (01)			10								22.8
TCH09044H20A00 (01)			20								27.4
TCH09054H05A00 (01)	540	546	5	720	640	500	70	6	25.6	11.9	
TCH09054H10A00 (01)			10								26.7
TCH09054H20A00 (01)			20								31.3
TCH09064H05A00 (01)	640	646	5	820	740	600	70	7	29.2	13.2	
TCH09064H10A00 (01)			10								30.3
TCH09064H20A00 (01)			20								34.9
TCH09074H05A00 (01)	740	746	5	920	840	700	70	8	33.3	14.6	
TCH09074H10A00 (01)			10								34.4
TCH09074H20A00 (01)			20								39.9
TCH09084H05A00 (01)	840	846	5	1 020	940	800	70	9	37.2	16.0	
TCH09084H10A00 (01)			10								38.3
TCH09084H20A00 (01)			20								42.8

TCH09 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)				No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	G			
TCH09025H05B00 (01)	250	260	5	520	440	300	70	4	18.96	9.5
TCH09025H10B00 (01)			10							
TCH09035H05B00 (01)	350	360	5	620	540	400	70	5	22.84	10.9
TCH09035H10B00 (01)			10							
TCH09045H05B00 (01)	450	460	5	720	640	500	70	6	26.71	12.4
TCH09045H10B00 (01)			10							
TCH09055H10B00 (01)	550	560	10	820	740	600	70	7	32.52	13.7
TCH09055H20B00 (01)			20							
TCH09075H10B00 (01)	750	760	10	1 020	940	800	70	9	40.24	16.5
TCH09075H20B00 (01)			20							

Items marked with * are unavailable for upside-down operation.

TCH10 Standard Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10010H10K00 (01)	100	126	10	373	280	150	100	65	2	42.72	9.6
* TCH10010H20K00 (01)			20								
TCH10020H10K00 (01)	200	226	10	473	380	300	200	40	3	54.97	11.5
TCH10020H20K00 (01)			20								
TCH10030H10K00 (01)	300	326	10	573	480	450	300	15	4	67.22	13.5
TCH10030H20K00 (01)			20								
TCH10040H10K00 (01)	400	426	10	673	580	450	400	65	4	79.47	15.4
TCH10040H20K00 (01)			20								
TCH10050H10K00 (01)	500	526	10	773	680	600	500	40	5	91.72	17.4
TCH10050H20K00 (01)			20								
TCH10060H10K00 (01)	600	626	10	873	780	750	600	15	6	104.02	19.3
TCH10060H20K00 (01)			20								
TCH10070H10K00 (01)	700	726	10	973	880	750	700	65	6	116.22	21.2
TCH10070H20K00 (01)			20								
TCH10080H10K00 (01)	800	826	10	1 073	980	900	800	40	7	128.52	23.2
TCH10080H20K00 (01)			20								
TCH10090H10K00 (01)	900	926	10	1 173	1 080	1 050	900	15	8	140.70	25.2
TCH10090H20K00 (01)			20								
TCH10100H10K00 (01)	1 000	1 026	10	1 273	1 180	1 050	1 000	65	8	152.94	27.1
TCH10100H20K00 (01)			20								
TCH10110H10K00 (01)	1 100	1 126	10	1 373	1 280	1 200	1 100	40	9	165.19	29.1
TCH10110H20K00 (01)			20								
TCH10120H10K00 (01)	1 200	1 226	10	1 473	1 380	1 350	1 200	15	10	177.43	31.1
TCH10120H20K00 (01)			20								

TCH10 Standard Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10027H10D00 (01)	270	281	10	673	580	450	400	65	4	83.02	16.8
* TCH10027H20D00 (01)			20								
* TCH10037H10D00 (01)	370	381	10	773	680	600	500	40	5	95.27	18.8
* TCH10037H20D00 (01)			20								
TCH10047H10D00 (01)	470	481	10	873	780	750	600	15	6	107.57	20.7
TCH10047H20D00 (01)			20								
TCH10057H10D00 (01)	570	581	10	973	880	750	700	65	6	119.77	22.6
TCH10057H20D00 (01)			20								
TCH10067H10D00 (01)	670	681	10	1 073	980	900	800	40	7	132.07	24.6
TCH10067H20D00 (01)			20								
TCH10077H20D00 (01)	770	781	10	1 173	1 080	1 050	900	15	8	165.54	26.6
TCH10087H20D00 (01)			20								
TCH10097H20D00 (01)	970	981	10	1 373	1 280	1 200	1 100	40	9	190.03	30.5
TCH10107H20D00 (01)			20								

TCH10 Short Slider Specifications (Single)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
* TCH10016H10A00 (01)	160	170	10	373	280	150	100	65	2	41.20	8.9
* TCH10016H20A00 (01)			20								
TCH10026H10A00 (01)	260	270	10	473	380	300	200	40	3	53.45	10.9
TCH10026H20A00 (01)			20								
TCH10036H10A00 (01)	360	370	10	573	480	450	300	15	4	65.70	12.8
TCH10036H20A00 (01)			20								
TCH10046H10A00 (01)	460	470	10	673	580	450	400	65	4	77.95	14.8
TCH10046H20A00 (01)			20								
TCH10056H10A00 (01)	560	570	10	773	680	600	500	40	5	90.20	16.7
TCH10056H20A00 (01)			20								
TCH10066H10A00 (01)	660	670	10	873	780	750	600	15	6	102.50	18.6
TCH10066H20A00 (01)			20								
TCH10076H10A00 (01)	760	770	10	973	880	750	700	65	6	114.70	20.6
TCH10076H20A00 (01)			20								
TCH10086H10A00 (01)	860	870	10	1 073	980	900	800	40	7	127.00	22.6
TCH10086H20A00 (01)			20								
TCH10096H10A00 (01)	960	970	10	1 173	1 080	1 050	900	15	8	139.18	24.5
TCH10096H20A00 (01)			20								
TCH10106H10A00 (01)	1 060	1 070	10	1 273	1 180	1 050	1 000	65	8	151.42	26.5
TCH10106H20A00 (01)			20								
TCH10116H10A00 (01)	1 160	1 170	10	1 373	1 280	1 200	1 100	40	9	163.67	28.4
TCH10116H20A00 (01)			20								
TCH10126H10A00 (01)	1 260	1 270	10	1 473	1 380	1 350	1 200	15	10	175.91	30.4
TCH10126H20A00 (01)			20								

TCH10 Short Slider Specifications (Double)

Reference number	Nominal stroke (mm)	Stroke limit (mm)	Ball screw lead (mm)	Body length (mm)					No. of mounting holes n	Inertia $\times 10^{-6}$ (kg · m ²)	Mass (kg)
				L ₁	L ₂	L ₃	L ₄	G			
TCH10036H10B00 (01)	360	369	10	673	580	450	400	65	4	79.97	15.6
TCH10036H20B00 (01)			20								
TCH10046H10B00 (01)	460	469	10	773	680	600	500	40	5	92.22	17.5
TCH10046H20B00 (01)			20								
TCH10056H10B00 (01)	560	569	10	873	780	750	600	15	6	104.52	19.4
TCH10056H20B00 (01)			20								
TCH10066H10B00 (01)	660	669	10	973	880	750	700	65	6	116.72	21.4
TCH10066H20B00 (01)			20								
TCH10076H10B00 (01)	760	769	10	1 073	980	900	800	40	7	129.02	23.4
TCH10076H20B00 (01)			20								
TCH10086H20B00 (01)	860	869	10	1 173	1 080	1 050	900	15	8	153.37	25.3
TCH10096H20B00 (01)			20								
TCH10106H20B00 (01)	1 060	1 069	10	1 373	1 280	1 200	1 100	40	9	177.86	29.2
TCH10116H20B00 (01)			20								

Items marked with * are unavailable for upside-down operation.


4.6 Accessory Specifications

4.6.1 Sensor Unit

Reference number


TC	-	SRH		XX	-	1	X
TOUGH CARRIER		SENSOR UNIT		NOMINAL SIZE			CODING FOR MODEL NO.
TC: Toughcarrier				0: Proximity switch (3 b-contacts) 1: Proximity switch (3 a-contacts) 2: Proximity switch (1 a-contact, 2-b contacts) 3: Photo sensor (3 sensors)			

Proximity switch

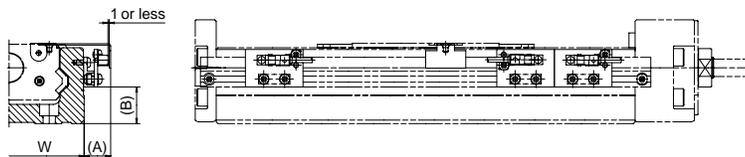

Model no.	Reference number			Dimensions		
				A (mm)	B (mm)	Body width W (mm)
TCH06	TC-SRH06-10	TC-SRH06-11	TC-SRH06-12	17	10	60
TCH09	TC-SRH09-10	TC-SRH09-11	TC-SRH09-12	16	21	86
TCH10	TC-SRH10-10	TC-SRH10-11	TC-SRH10-12	16	25	100
Quantity	Proximity switch (a-contact)	—	3	1	E2S-W13 (OMRON Corp.)	
	Proximity switch (b-contact)	3	—	2	E2S-W14 (OMRON Corp.)	

Photo sensor

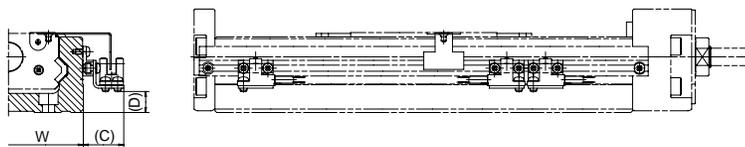


Model no.	Reference number	Dimensions			Note
		C (mm)	D (mm)	Body width W (mm)	
TCH06	TC-SRH06-13	24	2	60	EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector included)
TCH09	TC-SRH09-13	24	12	86	
TCH10	TC-SRH10-13	24	16	100	

(1) Sensor Rail

Reference number

TC	-	SRL		X	-	XXXX
TOUGH CARRIER		SENSOR RAIL		NOMINAL SIZE		BODY RAIL LENGTH
TC: Toughcarrier				6: 06 9: 09 1: 10		

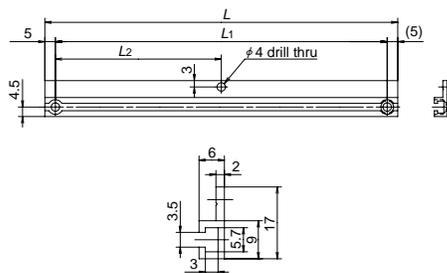


Model no.	Body rail length	Dimensions			
		L	L ₁	L ₂	
TCH06	150	168	158	79	
	200	218	208	104	
	300	318	308	154	
	400	418	408	204	
	500	518	508	254	
	600	618	608	304	
TCH09	240	258	248	124	
	340	358	348	174	
	440	458	448	224	
	540	558	548	274	
	640	658	648	324	
	740	758	748	374	
	840	858	848	424	
	940	958	948	474	
	TCH10	280	298	288	144
		380	398	388	194
480		498	488	244	
580		598	588	294	
680		698	688	344	
780		798	788	394	
880		898	888	444	
980		998	988	494	
1080		1098	1088	544	
1180		1198	1188	594	
1280	1298	1288	644		
1380	1398	1388	694		


4.6.2 Cover Unit

Cover Unit

TC-HV06XXXK00
TC-HV06XXXD00

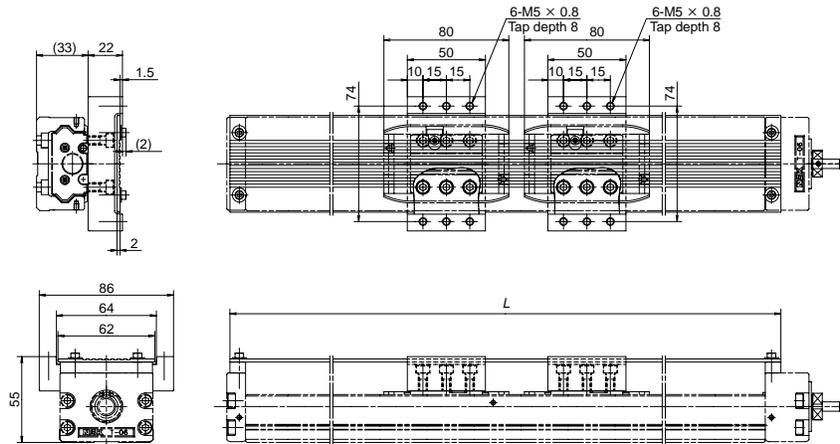

TC-HV06XXXA00
TC-HV06XXXB00

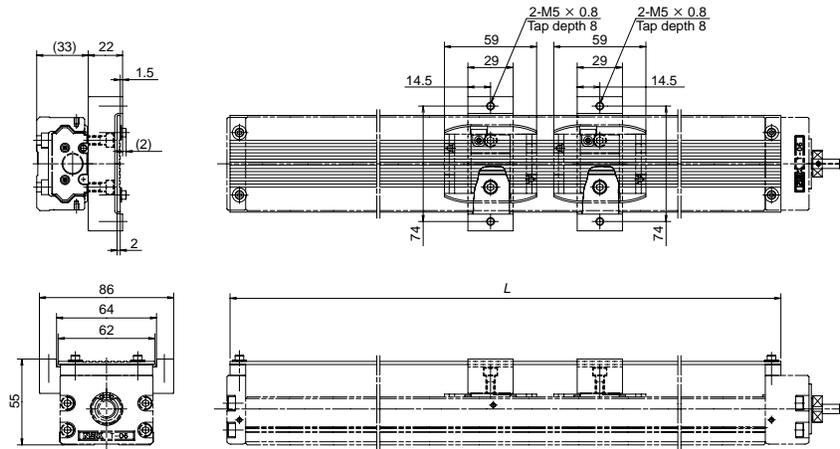


TCH06


Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
150	170	TC-HV06005K00	—	TC-HV06007A00	—
200	220	TC-HV06010K00	—	TC-HV06012A00	—
300	320	TC-HV06020K00	TC-HV06013D00	TC-HV06022A00	TC-HV06017B00
400	420	TC-HV06030K00	TC-HV06023D00	TC-HV06032A00	TC-HV06027B00
500	520	TC-HV06040K00	TC-HV06033D00	TC-HV06042A00	TC-HV06037B00
600	620	TC-HV06050K00	TC-HV06043D00	TC-HV06052A00	TC-HV06047B00

ToughCarrier™

TC-HV09XXXK00
TC-HV09XXXD00

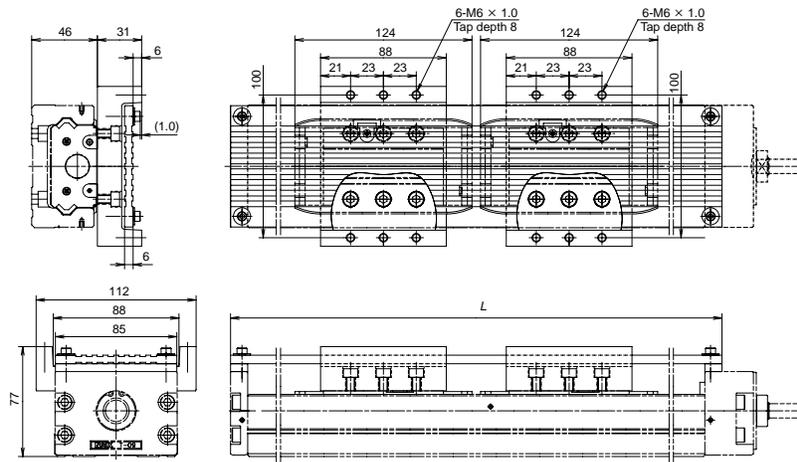


TC-HV09XXXA00
TC-HV09XXXB00

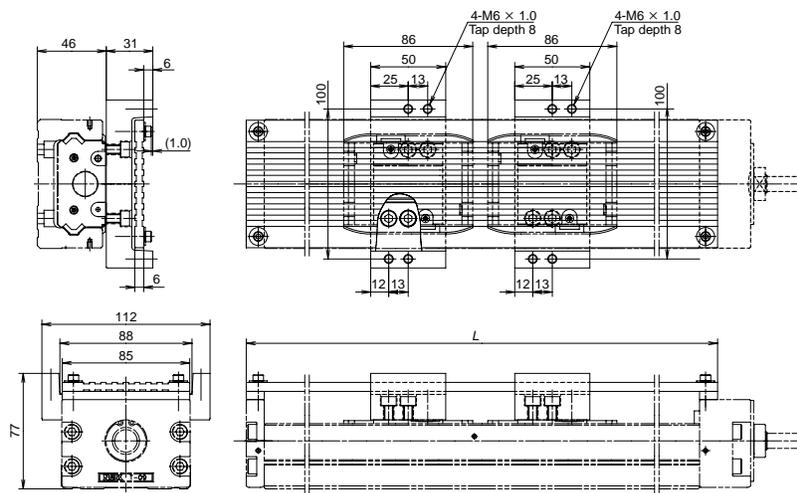


TCH09

Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
240	264	TC-HV09010K00	-	TC-HV09014A00	-
340	364	TC-HV09020K00	-	TC-HV09024A00	-
440	464	TC-HV09030K00	TC-HV09017D00	TC-HV09034A00	TC-HV09025B00
540	564	TC-HV09040K00	TC-HV09027D00	TC-HV09044A00	TC-HV09035B00
640	664	TC-HV09050K00	TC-HV09037D00	TC-HV09054A00	TC-HV09045B00
740	764	TC-HV09060K00	TC-HV09047D00	TC-HV09064A00	TC-HV09055B00
840	864	TC-HV09070K00	-	TC-HV09074A00	-
940	964	TC-HV09080K00	TC-HV09067D00	TC-HV09084A00	TC-HV09075B00

TC-HV10XXXK00
TC-HV10XXXD00

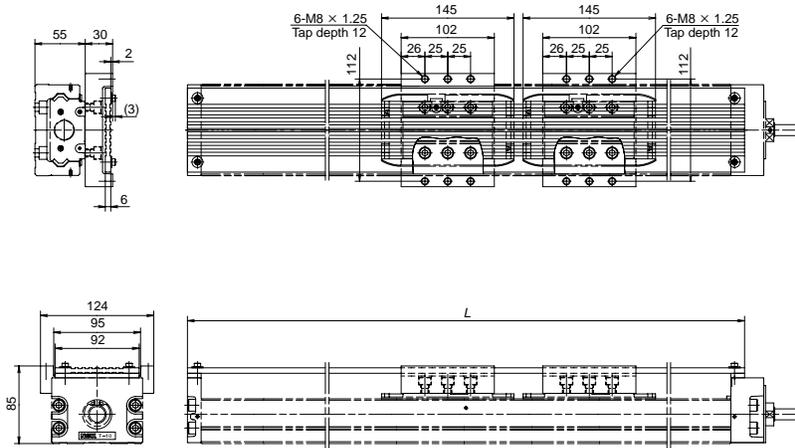

TC-HV10XXXA00
TC-HV10XXXB00

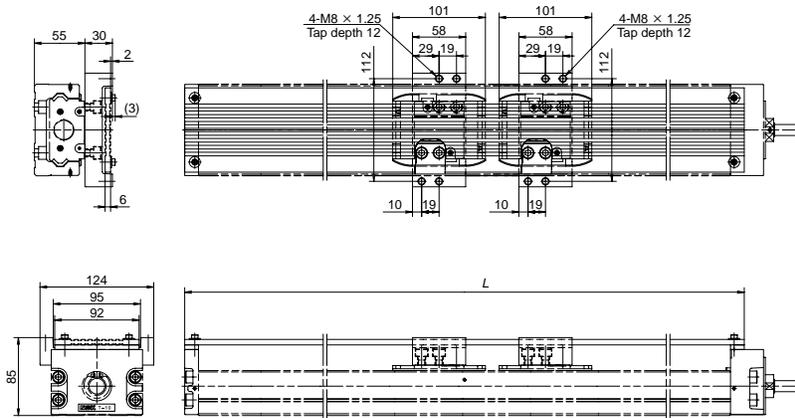

TCH10


Body rail length	Dimensions L	Slider specifications			
		Standard		Short	
		Single	Double	Single	Double
280	310	TC-HV10010K00	-	TC-HV10016A00	-
380	410	TC-HV10020K00	-	TC-HV10026A00	-
480	510	TC-HV10030K00	-	TC-HV10036A00	-
580	610	TC-HV10040K00	TC-HV10027D00	TC-HV10046A00	TC-HV10036B00
680	710	TC-HV10050K00	TC-HV10037D00	TC-HV10056A00	TC-HV10046B00
780	810	TC-HV10060K00	TC-HV10047D00	TC-HV10066A00	TC-HV10056B00
880	910	TC-HV10070K00	TC-HV10057D00	TC-HV10076A00	TC-HV10066B00
980	1 010	TC-HV10080K00	TC-HV10067D00	TC-HV10086A00	TC-HV10076B00
1 080	1 110	TC-HV10090K00	TC-HV10077D00	TC-HV10096A00	TC-HV10086B00
1 180	1 210	TC-HV10100K00	TC-HV10087D00	TC-HV10106A00	TC-HV10096B00
1 280	1 310	TC-HV10110K00	TC-HV10097D00	TC-HV10116A00	TC-HV10106B00
1 380	1 410	TC-HV10120K00	TC-HV10107D00	TC-HV10126A00	TC-HV10116B00

4.6.3 Motor Bracket

Motor bracket

Motor models are subject to change by the motor manufacturers. For details, please contact the manufacturer. For motors other than applicable motors shown below, please contact NSK.


Reference number
TC-BKH06-145-00

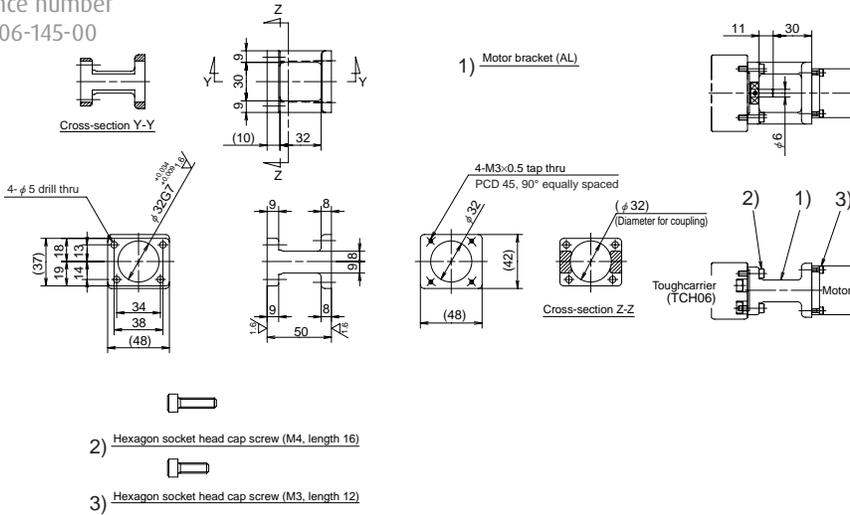

- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD5A(50W), MSMD10(100W)


Reference number
TC-BKH06-146-00

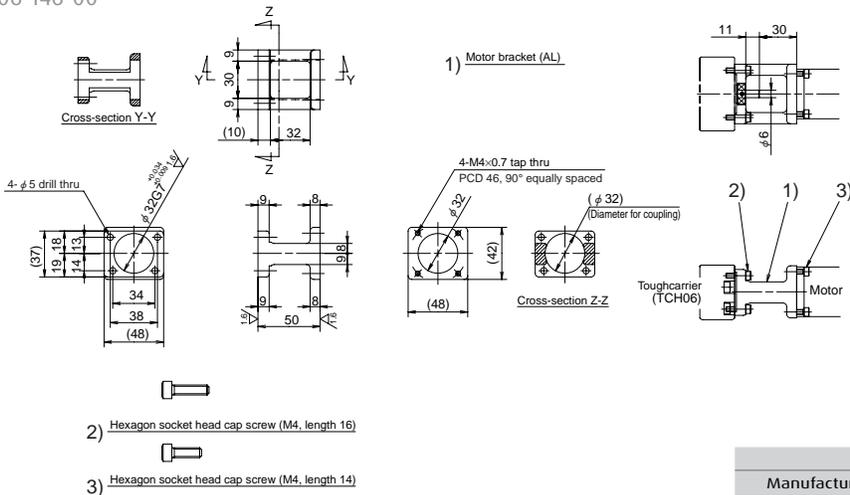

- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-A5A(50W), SGMVA-A5A(50W), SGMJV-01A(100W), SGMVA-01A(100W), SGMVA-C2A(150W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HCMFS053(50W), HF-KP13(100W), HF-MP13(100W), HCKFS13(100W), HC-MFS13(100W)
OMRON Corp.	R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)
SANYO DENKI Co., Ltd.	P30B04003(30W), P30B04005(50W), P30B04010(100W), R2AA04005(50W), R2AA04010(100W)


Reference number
TC-BKH06-148-00

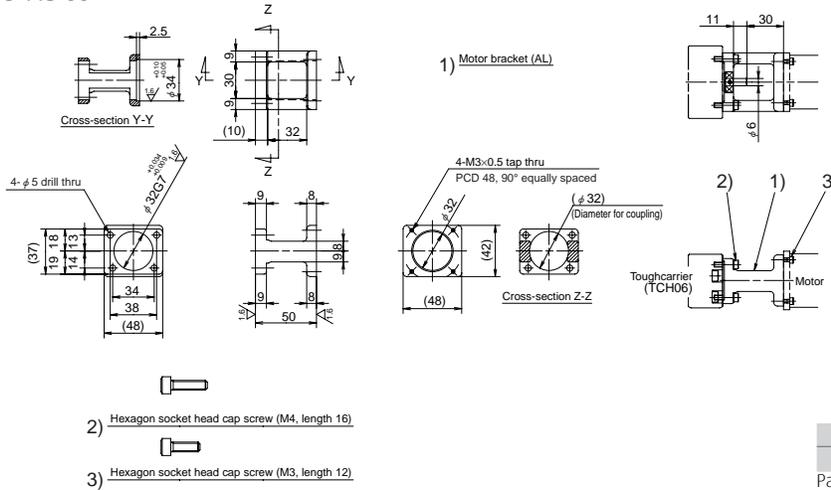

- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MAMA01(100W)
SANYO DENKI Co., Ltd.	P50B04006(60W), P50B04010(100W)

Reference number
TC-BKH06-160-00

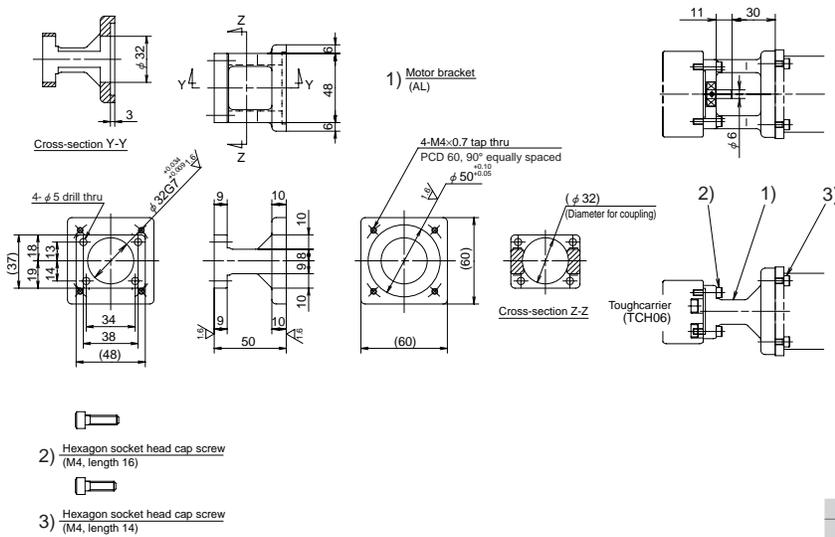


- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)

ToughCarrier™


Reference number
TC-BKH06-250-00

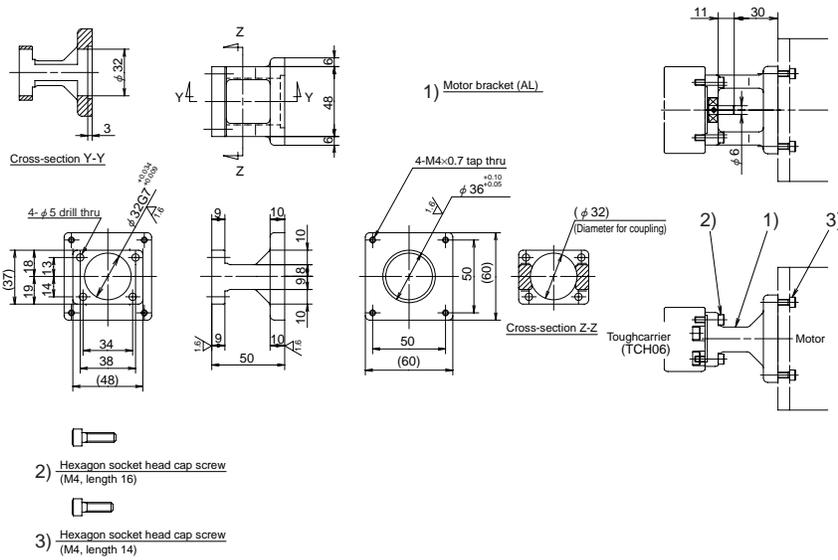

- Notes:
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56X, PK56X, CSK56X, CFK56X, UFK56X


Reference number
TC-BKH09-145-00

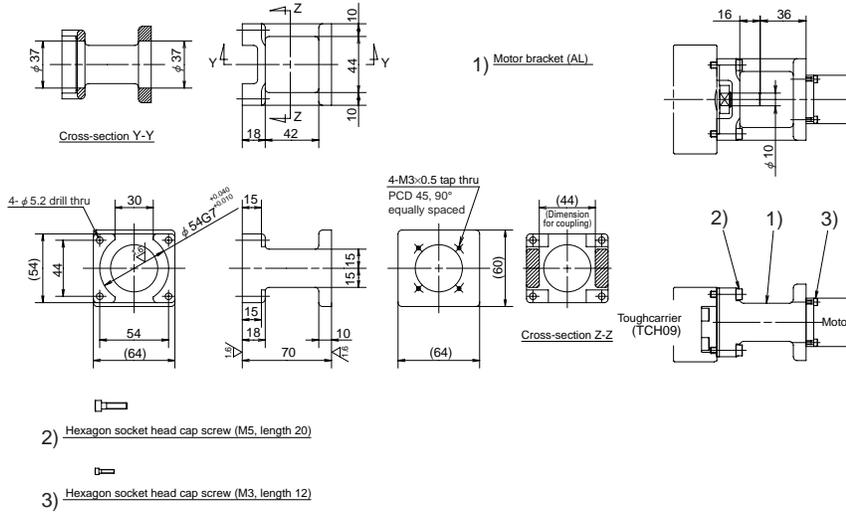

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD01(100W)

Reference number
TC-BKH09-146-00

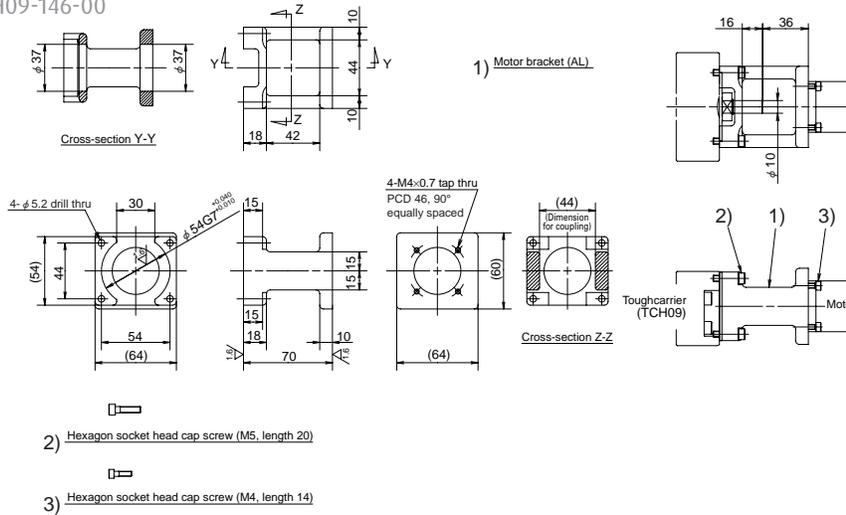


Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-01A(100W), SGMVAV-01A(100W), SGMVAV-C2A(150W), SGMJV-C2A(150W)
Mitsubishi Electric Corp.	HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)
OMRON Corp.	P30B04005(50W), P30B04010(100W), R2AA04010(100W)

ToughCarrier™


Reference number
TC-BKH09-160-00

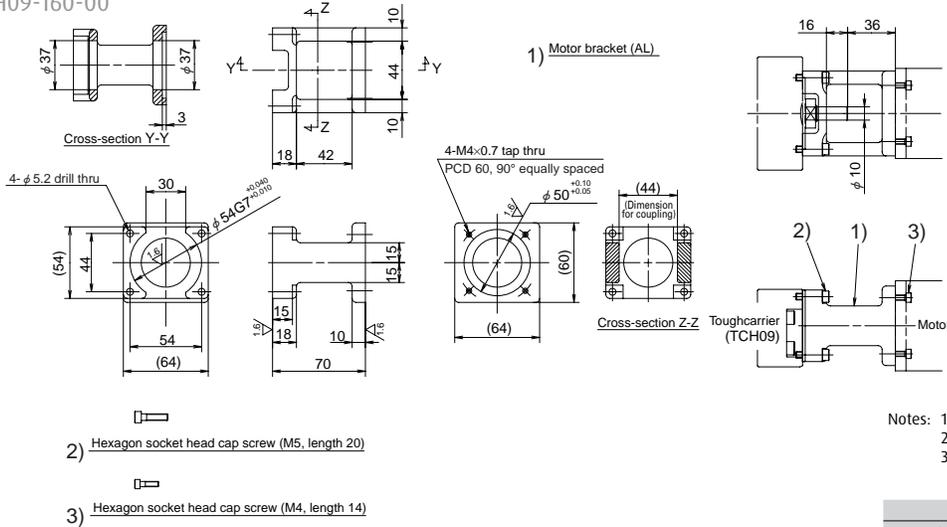

- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B05005(50W), P50B05010(100W), P50B05020(200W)


Reference number
TC-BKH09-170-00

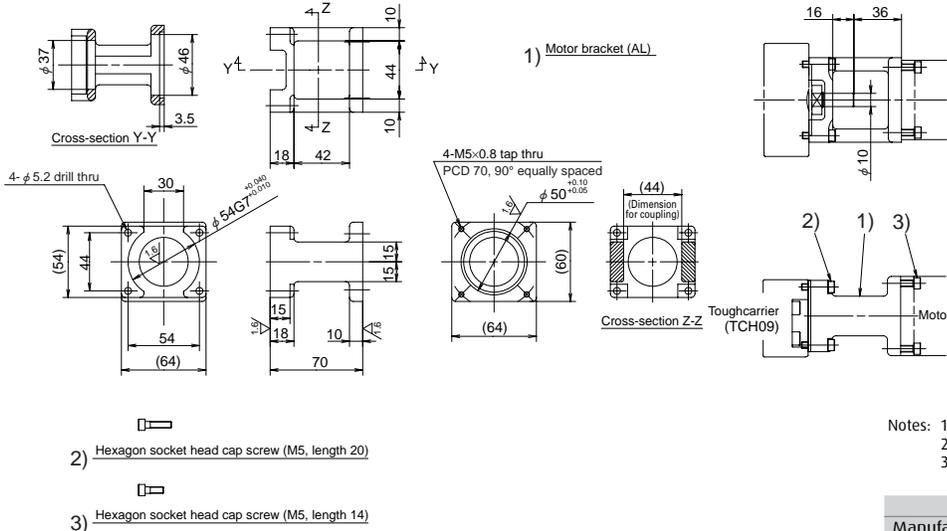

- Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMVAV-02A(200W), SGMJV-04A(400W), SGMVAV-04A(400W)
Mitsubishi Electric Corp.	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
OMRON Corp.	R88M-W20(200W), R88M-W40(400W)
SANYO DENKI Co., Ltd.	P50B06020(200W), P30B06040(400W), R2AA06010(100W), R2AA06020(200W), R2A06040(400W)

Reference number
TC-BKH09-170-01

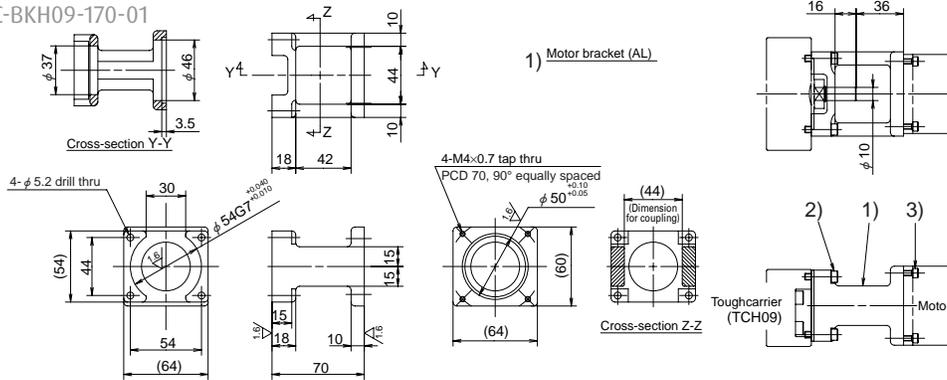


- 1) Motor bracket (AL)
- 2) Hexagon socket head cap screw (M5, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

Reference number
TC-BKH09-190-00

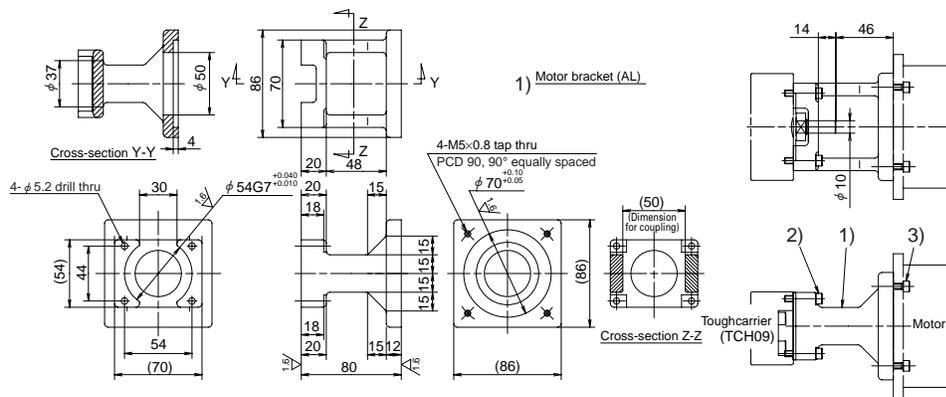


- 1) Motor bracket (AL)
- 2) Hexagon socket head cap screw (M5, length 25)
- 3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

ToughCarrier™

Reference number
TC-BKH09-250-00

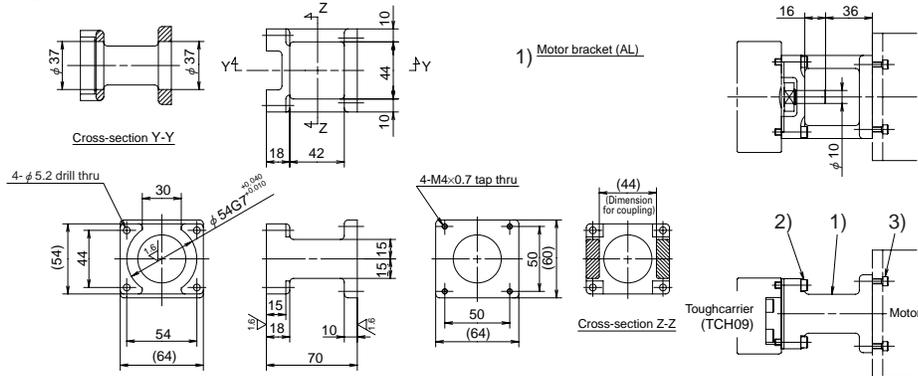


- 2)  Hexagon socket head cap screw (M5, length 20)
- 3)  Hexagon socket head cap screw (M4, length 14)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	PBM603XXX, PBM604XXX, 103F78XX
ORIENTAL MOTOR Co., Ltd.	AS66, ASC66, UPK56XX, PK56XX, CSK56X, CFK56X, UFK56X

Reference number
TC-BKH09-270-00

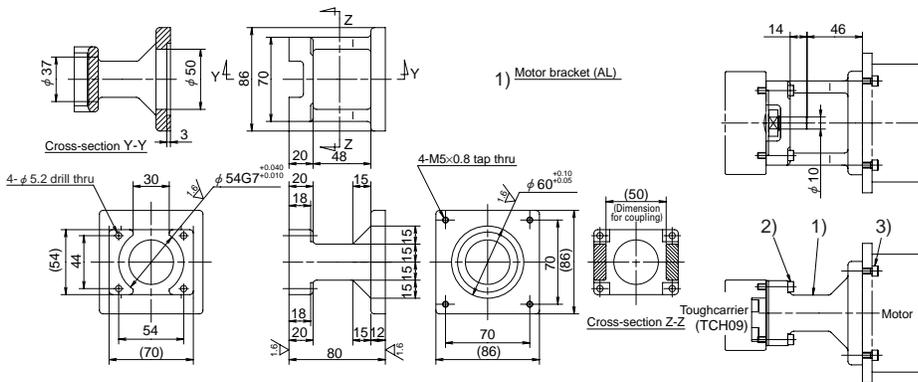


- 2)  Hexagon socket head cap screw (M5, length 25)
- 3)  Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103F85XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK56X, CFK59X, UFK59X

Reference number
TC-BKH10-170-00

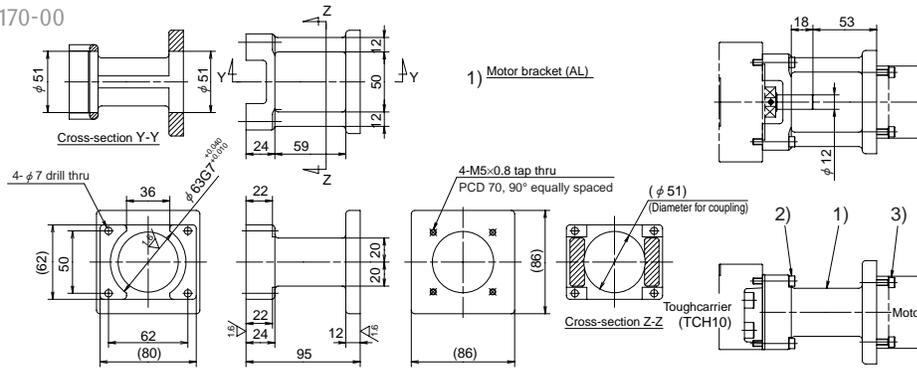


- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 20)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
YASKAWA Electric Corp.	SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W)
	HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W)
Mitsubishi Electric Corp.	R88M-W20(200W), R88M-W40(400W)
OMRON Corp.	P30B06020(200W), P30B06040(400W)
SANYO DENKI Co., Ltd.	R2AA06020(200W), R2AA06040(400W)

Reference number
TC-BKH10-170-01

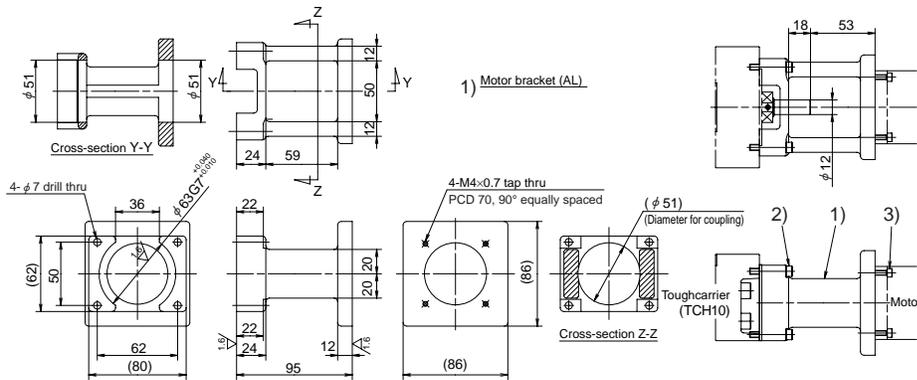


- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M4, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W)

ToughCarrier™

Reference number
TC-BKH10-190-00

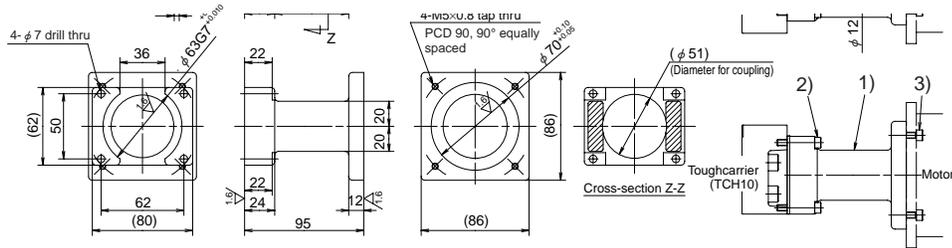


- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
Panasonic Co., Ltd.	MSMD08(750W), MAMA08(750W)
SANYO DENKI Co., Ltd.	P50B07020(200W), P50B07030(300W), P50B07040(400W)

Reference number
TC-BKH10-270-00

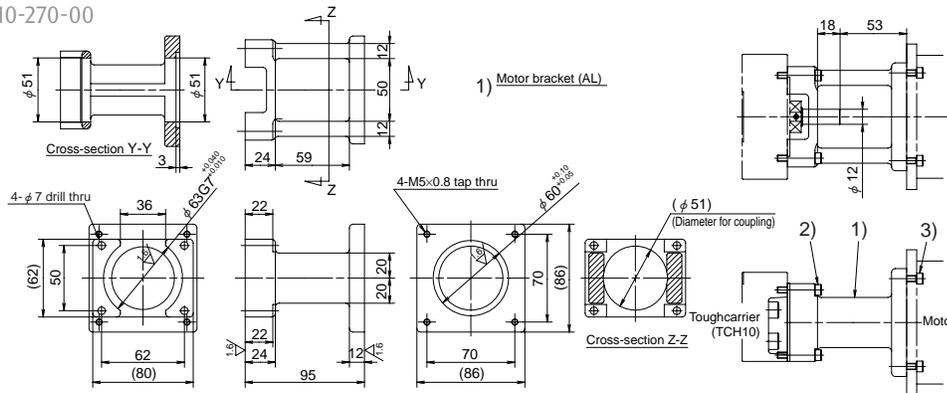

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 16)

Notes: 1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors	
Manufacturer	Motor model
SANYO DENKI Co., Ltd.	103FB5XX
ORIENTAL MOTOR Co., Ltd.	AS98, UPK59X, PK59X, CSK59X, CFK59X, UFK59X

4.7 Motor Bracket Compatibility Table

Model No.	Reference number	Motor manufacturer	Stepping motor model no.	Wattage of AC servo motor									
				30W	50W	60W	100W	150W	200W	300W	400W	750W	
TCH06	TC-BKH06-145-00	Panasonic Co., Ltd.			MSMD5A		MSMD10						
	TC-BKH06-146-00	YASKAWA Electric Corp.			SGMJV-A5A SGMAV-A5A		SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A					
		Mitsubishi Electric Corp.			HF-KP053 HF-MP053 HC-KFS053 HC-MFS053		HF-KP13 HF-MP13 HC-KFS13 HC-MFS13						
		OMRON Corp.		R88M-W03	R88M-W05		R88M-W10						
		SANYO DENKI Co., Ltd.		P30B04003	P30B04005 R2AA04005		P30B04010 R2AA04010						
	TC-BKH06-148-00	Panasonic Co., Ltd.											
		SANYO DENKI Co., Ltd.			P50B04006		P50B04010						
	TC-BKH06-160-00	SANYO DENKI Co., Ltd.			P50B05005		P50B05010		P50B05020				
	TC-BKH06-250-00	SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX										
		ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPK56X PK56X CSK56X CFK56X UFK56X										
TCH09	TC-BKH09-145-00	Panasonic Co., Ltd.					MSMD01						
	TC-BKH09-146-00	YASKAWA Electric Corp.					SGMJV-01A SGMAV-01A	SGMJV-C2A SGMAV-C2A					
		Mitsubishi Electric Corp.					HF-KP13 HF-MP13 HC-KFS13 HC-MFS13						
		SANYO DENKI Co., Ltd.			P30B04005		P30B04010 R2AA04010						
	TC-BKH09-160-00	SANYO DENKI Co., Ltd.			P50B05005		P50B05010		P50B05020				
	TC-BKH09-170-00	YASKAWA Electric Corp.								SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A	
		Mitsubishi Electric Corp.								HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43	
		OMRON Corp.								R88M-W20		R88M-W40	
		SANYO DENKI Co., Ltd.						R2AA06010		P30B06020 R2AA06020		P30B06040 R2AA06040	
	TC-BKH09-170-01	Panasonic Co., Ltd.							MSMD02 MAMA02		MSMD04 MAMA04		
TC-BKH09-190-00	SANYO DENKI Co., Ltd.							P50B07020	P50B07030	P50B07040			
TC-BKH09-250-00	SANYO DENKI Co., Ltd.	PBM603XXX PBM604XXX 103F78XX											
	ORIENTAL MOTOR Co., Ltd.	AS66 ASC66 UPK56X PK56X CSK56X CFK56X UFK56X											
TC-BKH09-270-00	ORIENTAL MOTOR Co., Ltd.	AS98 UPK59X PK59X CSK59X CFK59X UFK59X											
	SANYO DENKI Co., Ltd.	103F85XX											
TCH10	TC-BKH10-170-00	YASKAWA Electric Corp.							SGMJV-02A SGMAV-02A		SGMJV-04A SGMAV-04A		
		Mitsubishi Electric Corp.							HF-KP23 HF-MP23 HC-KFS23 HC-MFS23		HF-KP43 HF-MP43 HC-KFS43 HC-MFS43		
		OMRON Corp.							R88M-W20		R88M-W40		
		SANYO DENKI Co., Ltd.							P30B06020 R2AA06020		P30B06040 R2AA06040		
	TC-BKH10-170-01	Panasonic Co., Ltd.						MSMD02 MAMA02		MSMD04 MAMA04			
	TC-BKH10-190-00	Panasonic Co., Ltd.											MSMD08 MAMA08
		SANYO DENKI Co., Ltd.								P50B07020	P50B07030	P50B07040	
TC-BKH10-270-00	ORIENTAL MOTOR Co., Ltd.	103F85XX AS98 UPK59X PK59X CSK59X CFK59X UFK59X											

4.8 Sensor Rail and Top Cover Unit Combination Table

Model No.	Reference number	Rail length (L.)	Sensor rail reference number	Cover unit reference number
TCH06	TCH06005H05K00 TCH06005H10K00 TCH06005H20K00	150	TC-SRL6-0150	TC-HV06005K00
	TCH06007H05A00 TCH06007H10A00			TC-HV06007A00
	TCH06010H05K00 TCH06010H10K00 TCH06010H20K00	200	TC-SRL6-0200	TC-HV06010K00
	TCH06012H05A00 TCH06012H10A00			TC-HV06012A00
	TCH06020H05K00 TCH06020H10K00 TCH06020H20K00	300	TC-SRL6-0300	TC-HV06020K00
	TCH06013H05D00 TCH06013H10D00			TC-HV06013D00
	TCH06022H05A00 TCH06022H10A00			TC-HV06022A00
	TCH06017H05B00 TCH06017H10B00			TC-HV06017B00
	TCH06030H05K00 TCH06030H10K00 TCH06030H20K00	400	TC-SRL6-0400	TC-HV06030K00
	TCH06023H05D00 TCH06023H10D00			TC-HV06023D00
	TCH06032H05A00 TCH06032H10A00			TC-HV06032A00
	TCH06027H05B00 TCH06027H10B00			TC-HV06027B00
	TCH06040H05K00 TCH06040H10K00 TCH06040H20K00	500	TC-SRL6-0500	TC-HV06040K00
	TCH06033H05D00 TCH06033H10D00			TC-HV06033D00
	TCH06042H05A00 TCH06042H10A00			TC-HV06042A00
	TCH06037H05B00 TCH06037H10B00			TC-HV06037B00
	TCH06050H05K00 TCH06050H10K00 TCH06050H20K00	600	TC-SRL6-0600	TC-HV06050K00
	TCH06043H10D00 TCH06043H20D00			TC-HV06043D00
	TCH06052H05A00 TCH06052H10A00 TCH06047H10B00			TC-HV06052A00 TC-HV06047B00

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

Model No.	Reference number	Rail length (L _r)	Sensor rail reference number	Cover unit reference number
TCH09	TCH09010H05K00 TCH09010H10K00 TCH09010H20K00	240	TC-SRL9-0240	TC-HV09010K00
	TCH09014H05A00 TCH09014H10A00 TCH09014H20A00			TC-HV09014A00
	TCH09020H05K00 TCH09020H10K00 TCH09020H20K00			TC-HV09020K00
	TCH09024H05A00 TCH09024H10A00 TCH09024H20A00	340	TC-SRL9-0340	TC-HV09024A00
	TCH09030H05K00 TCH09030H10K00 TCH09030H20K00			TC-HV09030K00
	TCH09017H05D00 TCH09017H10D00			TC-HV09017D00
	TCH09034H05A00 TCH09034H10A00 TCH09034H20A00	440	TC-SRL9-0440	TC-HV09034A00
	TCH09025H05B00 TCH09025H10B00			TC-HV09025B00
	TCH09040H05K00 TCH09040H10K00 TCH09040H20K00			TC-HV09040K00
	TCH09027H05D00 TCH09027H10D00	540	TC-SRL9-0540	TC-HV09027D00
	TCH09044H05A00 TCH09044H10A00 TCH09044H20A00			TC-HV09044A00
	TCH09035H05B00 TCH09035H10B00			TC-HV09035B00
	TCH09050H05K00 TCH09050H10K00 TCH09050H20K00	640	TC-SRL9-0640	TC-HV09050K00
	TCH09037H05D00 TCH09037H10D00 TCH09054H05A00			TC-HV09037D00
	TCH09054H10A00 TCH09054H20A00 TCH09045H05B00 TCH09045H10B00			TC-HV09054A00
	TCH09060H05K00 TCH09060H10K00 TCH09060H20K00	740	TC-SRL9-0740	TC-HV09060K00
	TCH09047H10D00 TCH09047H20D00			TC-HV09047D00
	TCH09064H05A00 TCH09064H10A00 TCH09064H20A00			TC-HV09064A00
	TCH09055H10B00 TCH09055H20B00	840	TC-SRL9-0840	TC-HV09055B00
	TCH09070H05K00 TCH09070H10K00 TCH09070H20K00			TC-HV09070K00
	TCH09074H05A00 TCH09074H10A00 TCH09074H20A00			TC-HV09074A00
	TCH09080H05K00 TCH09080H10K00 TCH09080H20K00	940	TC-SRL9-0940	TC-HV09080K00
	TCH09067H10D00 TCH09067H20D00			TC-HV09067D00
	TCH09084H05A00 TCH09084H10A00 TCH09084H20A00			TC-HV09084A00
	TCH09075H10B00 TCH09075H20B00			TC-HV09075B00

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

ToughCarrier™

Model No.	Reference number	Rail length (L ₂)	Sensor rail reference number	Cover unit reference number	
TCH10	TCH10010H10K00	280	TC-SRL1-0280	TC-HV10010K00	
	TCH10010H20K00			TC-HV10016A00	
	TCH10016H10A00	380		TC-SRL1-0380	TC-HV10020K00
	TCH10016H20A00				TC-HV10026A00
	TCH10020H10K00	480	TC-SRL1-0480		TC-HV10030K00
	TCH10020H20K00				TC-HV10036A00
	TCH10026H10A00	580		TC-SRL1-0580	TC-HV10040K00
	TCH10026H20A00				TC-HV10027D00
	TCH10030H10K00	680	TC-SRL1-0680		TC-HV10046A00
	TCH10030H20K00				TC-HV10036B00
	TCH10036H10A00	780		TC-SRL1-0780	TC-HV10050K00
	TCH10036H20A00				TC-HV10037D00
	TCH10040H10K00	880	TC-SRL1-0880		TC-HV10056A00
	TCH10040H20K00				TC-HV10046B00
	TCH10027H10D00	980		TC-SRL1-0980	TC-HV10060K00
	TCH10027H20D00				TC-HV10047D00
	TCH10046H10A00	1 080	TC-SRL1-1080		TC-HV10066A00
	TCH10046H20A00				TC-HV10056B00
	TCH10050H10K00	1 180		TC-SRL1-1180	TC-HV10070K00
	TCH10050H20K00				TC-HV10057D00
	TCH10037H10D00	1 280	TC-SRL1-1280		TC-HV10076A00
	TCH10037H20D00				TC-HV10066B00
	TCH10056H10A00	1 380		TC-SRL1-1380	TC-HV10080K00
	TCH10056H20A00				TC-HV10067D00
	TCH10046H10B00	1 080	TC-SRL1-1080		TC-HV10086A00
	TCH10046H20B00				TC-HV10076B00
	TCH10060H10K00	1 180		TC-SRL1-1180	TC-HV10090K00
	TCH10060H20K00				TC-HV10077D00
	TCH10047H10D00	1 280	TC-SRL1-1280		TC-HV10096A00
	TCH10047H20D00				TC-HV10086B00
	TCH10066H10A00	1 380		TC-SRL1-1380	TC-HV10100K00
	TCH10066H20A00				TC-HV10087D00
	TCH10056H10B00	1 080	TC-SRL1-1080		TC-HV10106A00
	TCH10056H20B00				TC-HV10096B00
	TCH10070H10K00	1 180		TC-SRL1-1180	TC-HV10110K00
	TCH10070H20K00				TC-HV10097D00
	TCH10057H10D00	1 280	TC-SRL1-1280		TC-HV10116A00
	TCH10057H20D00				TC-HV10106B00
	TCH10076H10A00	1 380		TC-SRL1-1380	TC-HV10120K00
	TCH10076H20A00				TC-HV10107D00
	TCH10090H10K00	1 080	TC-SRL1-1080		TC-HV10126A00
	TCH10090H20K00				TC-HV10116B00
	TCH10077H20D00	1 180		TC-SRL1-1180	TC-HV10120K00
	TCH10096H10A00				TC-HV10107D00
	TCH10096H20A00	1 280	TC-SRL1-1280		TC-HV10126A00
	TCH10086H20B00				TC-HV10116B00
	TCH10100H10K00	1 380		TC-SRL1-1380	TC-HV10120K00
TCH10100H20K00	TC-HV10107D00				
TCH10087H20D00	1 080	TC-SRL1-1080	TC-HV10126A00		
TCH10106H10A00			TC-HV10116B00		
TCH10106H20A00	1 180		TC-SRL1-1180	TC-HV10120K00	
TCH10096H20B00				TC-HV10107D00	
TCH10110H10K00	1 280	TC-SRL1-1280		TC-HV10126A00	
TCH10110H20K00				TC-HV10116B00	
TCH10097H20D00	1 380		TC-SRL1-1380	TC-HV10120K00	
TCH10116H10A00				TC-HV10107D00	
TCH10116H20A00	1 080	TC-SRL1-1080		TC-HV10126A00	
TCH10106H20B00				TC-HV10116B00	
TCH10120H10K00	1 180		TC-SRL1-1180	TC-HV10120K00	
TCH10120H20K00				TC-HV10107D00	
TCH10107H20D00	1 280	TC-SRL1-1280		TC-HV10126A00	
TCH10126H10A00				TC-HV10116B00	
TCH10126H20A00	1 380		TC-SRL1-1380	TC-HV10120K00	
TCH10116H20B00				TC-HV10107D00	

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

4.9 Toughcarrier High-Thrust Series (Special product)

Specifications

The life of the feeding system is improved by use of higher load capacity ball screw part and support bearings for standard Toughcarrier.

		TCH06		TCH09		TCH10	
Ball screw	Shaft diameter (mm)	12		20		25	
	Lead (mm)	10	20	10	20	20	25
	Basic dynamic load rating Ca (N)	3 760	2 970	11 500	8 790	9 760	9 760
	Basic static load rating Coa (N)	6 310	4 240	25 700	18 500	23 600	23 600
Linear guide	Basic dynamic load rating C (N)	20 900		44 900		62 400	
	Basic static load rating Co (N)	45 000		96 900		132 000	
Support bearings	Basic dynamic load rating (N)	5 900		18 800		21 900	
	Load limit (N)	3 500		11 500		26 600	

- 1) Only compatible with standard slider.
- 2) Applicable strokes are as follows.
 - TCH06: Stroke 500 mm
 - TCH09: Stroke 800 mm
 - TCH10: Stroke 1 200 mm
- 3) High and precision grades are available for accuracy

Features

- 1) Mounting dimensions are the same as Monocarrier MCH Series and standard Toughcarrier (Interchangeable).
- 2) Permissible rotational speed is faster than standard Toughcarrier due to different ball recirculation system.

Technical Materials

5.1	Sensor Specification	
5.1.1	Proximity Switch	139
5.1.2	Photo Sensor	140
5.2	Characteristics and Evaluation Method	
5.2.1	Positioning Accuracy.....	141
5.2.2	Running Parallelism	141
5.2.3	Repeatability	141
5.3	Special Specifications.....	142
5.4	Maintenance	
5.4.1	Maintenance Method	143
5.4.2	NSK K1™ Lubricant Unit	143
5.5	NSK Clean Grease LG2 Specification.....	144

5.1 Sensor Specification

5.1.1 Proximity Switch


Use of OMRON E2S-W13, E2S-W14

Item	E2S-W13 type	E2S-W14 type
Setting surface	Front face	
Sensing distance	1.6mm ± 15%	
Setting distance	0 to 1.2mm	
Differential travel	10% max. of sensing distance	
Detectable object type	Ferrous metal	
Standard sensing object	Iron, 12 x 12 x 1 mm	
Response frequency	1 kHz min.	
Power supply voltage (operating voltage range)	12 to 24 V DC, ripple (p-p): 10% max. (10 to 30 V DC)	
Current consumption	13 mA max. at 24 V DC with no load	
Control output (Switching capacity)	NPN open collector output 50 mA max. (30 V DC max.)	
Control output (Residual voltage)	1.0 V max. with a load current of 50 mA and a cable length of 1 m	
Indicator	Operation indicator (orange)	
Operating status (with sensing object approaching)	NO (Normally open contact)	NC (Normally closed contact)
Wire lead length	1000 mm	

Notes:
 1. Do not make a wrong connection.
 2. Please contact NSK for PNP output type.

Movement Mode	Output Type	Type	Time Chart	Output Circuit
NO	NPN	E2S-W13 type	Target object: Yes (ON), No (OFF) Output transistor (load): ON, OFF Output transistor (orange): ON, OFF	<p>*(Maximum load current: 50mA)</p>
NC		E2S-W14 type	Target object: Yes (ON), No (OFF) Output transistor (load): ON, OFF Output transistor (orange): ON, OFF	

E2S-W13 (Normally open contact)
 E2S-W14 (Normally close contact)
 The external appearances are the same.

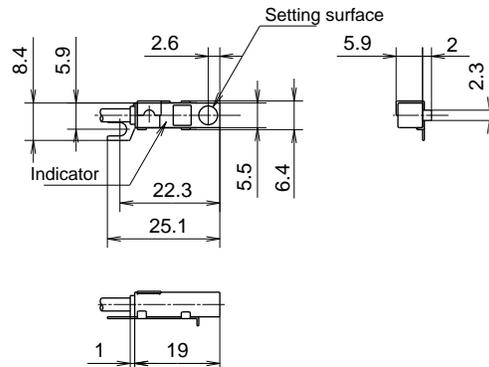

Technical Materials

5.1.2 Photo Sensor


Use of OMRON EE-SX674

Item	EE-SX674 type
Slot width	5mm
Standard reference object	Opaque: 2 x 0.8mm
Differential distance	0.025mm
Light source	GaAs infrared LED with a peak wavelength of 940 nm
Indicator (without detecting object)	ON GaP red LED (peak emission wavelength: 690 nm)
Supply voltage	5 to 24VDC \pm 10%, ripple: (p-p) 10% max.
Current consumption	35 mA max.
Control output	NPN open collector output models, 5 to 24 VD, 100 mA load current
Response frequency	1kHz max. (3kHz typ.)
Ambient illumination	Fluorescent light: 1,000 lx max.
Ambient temperature	Operating: -25°C to 55°C (-13°F to 131°F) Storage: -30°C to 80°C (-22°F to 176°F)
Ambient humidity	Operating: 5 to 85%RH Storage: 5 to 95%RH
Connecting method	EE-1001/1006 Connectors; soldering terminals

Notes: 1. Do not make a wrong connection.
2. Please contact NSK for PNP output type.

Type	Movement Mode	Time Chart	Connection Terminal	Output Circuit
EE-SX674 type	Light-ON		When terminals L and \oplus are short circuited	
	Dark-ON		When terminals L and \oplus are open circuited	


EE-SX674 (Sensor)
EE-1001 (Connector)
A connector is mounted to the sensor in the right figure.

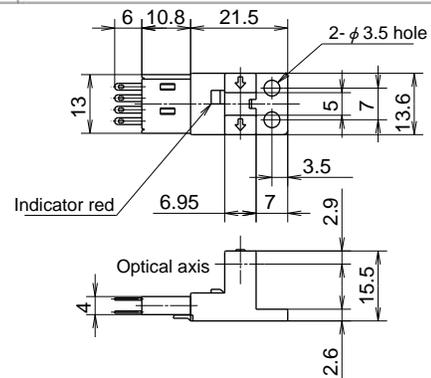

5.2 Characteristics and Evaluation Method


5.2.1 Positioning Accuracy

Perform positioning successively from the reference position in a specific direction. Measure the difference between the actual and desired travel distances for each point from the reference position. Repeat this measurement seven times to determine the average value. Measure the average value over the entire travel distance at the intervals specified for each model and take the maximum difference of the average values determined at respective positions as the measured value.

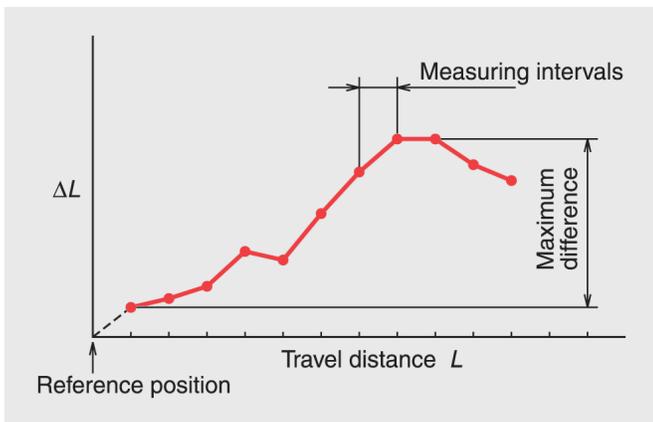


5.2.3 Repeatability

Repeat positioning at any point seven times from the same direction to measure the stopping position and determine one half of the maximum difference of readings. Repeat this measurement over the entire travel distance at the intervals specified for each model. Take the maximum difference of the determined values as the measured value. Express one half of the maximum difference with a plus or minus \pm sign.

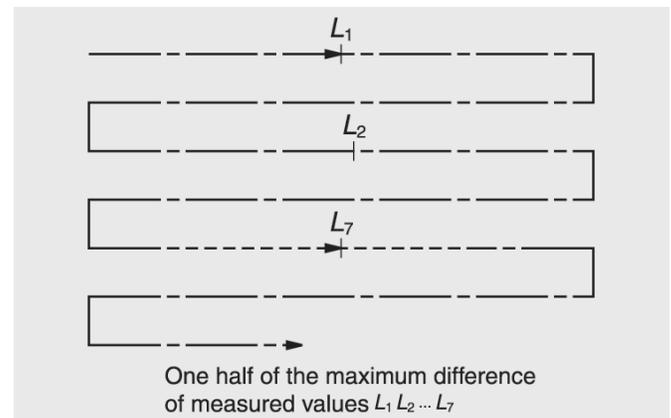

5.2.2 Running Parallelism (Vertical Direction)

We specify the parallelism of slider to the datum bottom surface of rail. An indicator is moved in the axial slider making its stylus slightly touching on the rail bottom surface. The slider is moved in the axial direction for the checking. We define the total indicator reading as the running parallelism. During the checking, the rail is not fixed to the table base. Please be aware that, in general application, the rail is fixed to the machine base, and thus the wobbly rolling error will be added to the running parallelism.

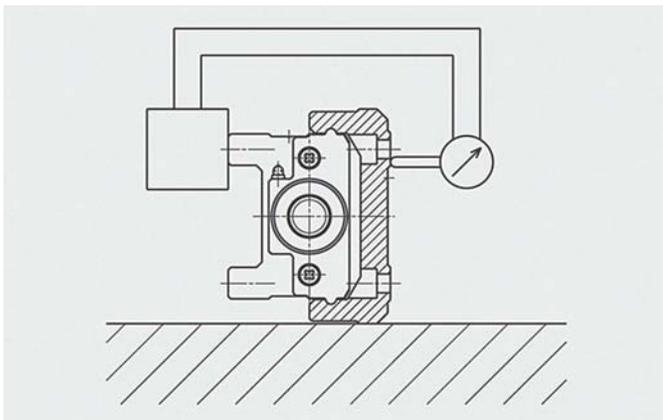

Setting of Indicator

5.3 Special Specifications

Please consult NSK if your requirement is not in the standard products.

(1) Surface Treatment

- Fluoride low temperature chrome plating
- Note: Ball screw parts (including low temperature chrome plating).

(2) Special Machining (Processing)

- Shaft end processing
 - Key way processing
 - One flat or two flats processing

- Pin hole processing
 - Slider
 - Rail

Note: Due to interference with the internal construction, the position of pin hole is limited. Please consult with NSK about the pin position.

(3) Motor Bracket and Intermediate Plate for Motor Mounting

- We can provide motor mounting brackets and intermediate plates that are not listed in the catalog.
- We can attach motor upon request if the motor is provided or specified in advance.

Note: Motion check of the motor is unavailable.

(4) Reversed Motor Mount

The reversed motor mount is available. Please consult NSK.

Note: 1) We do not check motor running condition.

(5) Right and Left Turn Thread

Right and left turn ball screw is available. Please consult with NSK for available leads.

(6) Ball-Screw-Less Specification (Only Linear Guide Part)


A ball-screw-less rail part with the same cross section of standard Monocarriers is available for a driven linear guide. It will lessen a height adjustment work compared with a construction with two standard Monocarriers.

Note: Height grinding adjustment of the two axes assembly is not available.

5.4 Maintenance

5.4.1 Maintenance Method

1. For standard Monocarrier, we pack grease in the slider, linear guides and ball screw.
2. Monocarriers are equipped with NSK K1 Lubrication Unit as a standard feature, therefore, you may use it for 5 years or 10,000 km depending on your application, whichever comes first, without maintenance. However, replenishment of preceded grease may extend its life substantially.
3. The NSK K1 Lubrication Unit is ideal in environments where oily dust exists. However, the life may be shorter than described in Clause 2 above. In such a case, it requires increasing the frequency of replenishment.
4. A nozzle for the NSK grease pump for MCH Monocarriers is available as an option.

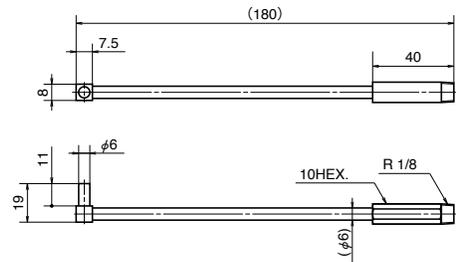

NSK HGP NZ8

Precautions for Handling

1. Please consult with NSK when the motor is coupled to the ball screw using a pulley because there is a restriction on the allowable load to the end of the ball screw shaft.
2. To extend the high performance of NSK K1™ Lubrication Unit, please observe the following:

- | | | |
|----------------------|---|------|
| 1. Temperature range | Ambient temperature: | 50°C |
| | Max. instantaneous temperature: | 80°C |
| 2. Use of chemicals | Never leave a Monocarrier™ in close proximity to grease removing organic solvents such as hexane or thinner. Never immerse it in an anti-rust solvent that contains kerosene. | |

Note: Other oils, such as water-based and oil-based cutting oil and grease, do not cause any problems.


5.4.2 NSK K1™ Lubrication Unit

NSK K1™ Lubrication Unit exhibits outstanding features, confirmed by abundant experimental data, along with the proven performance of linear guides and ball screws that are equipped with NSK K1™ Lubrication Unit.

(1) High-Speed Durability Test of Linear Guides Without Lubricant

Results of high-speed durability testing of a linear guide without lubricant are shown in chart to right. While the linear guide cannot be operated without lubricant for even short periods without damage, the installation of the NSK K1™ Lubrication Unit permits the linear guide to run over 25,000 km without any problem.

Conditions	Test piece: LH30AN (Preload Z1) Speed: 3.3 m/s Stroke: 1,800 mm
No lubricant	All grease removed
NSK K1™ Lubricant Unit	All grease removed + NSK K1™

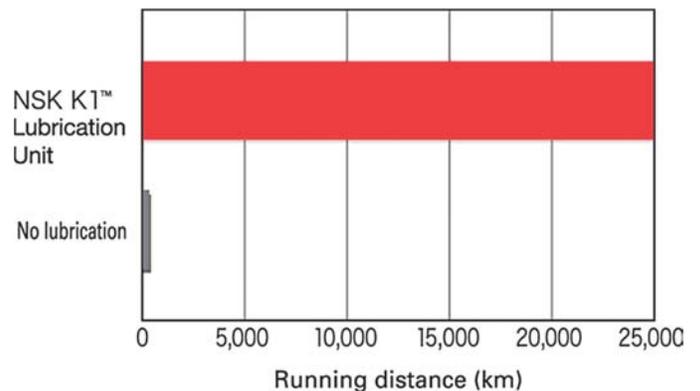


Results of High-Speed Durability Test of Linear Guides Without Lubricant

Technical Materials

(2) High-Speed Durability Test of Ball Screws Without Lubricant

Results of high-speed durability testing of ball screw without lubrication are shown in chart to right. While the ball screw cannot be operated without a lubricant at 8.5 km without damage, the installation of the NSK K1™ Lubrication Unit permits the ball screw to run over 21,000 km without any problem.

Conditions	Test piece: BS2020 (ball screw) Shaft diameter: 20 mm Lead: 20 mm Load: none Speed: 1.3m/s (4,000 min ⁻¹) Stroke: 600 mm
No lubricant	All grease removed
NSK K1™ Lubrication Unit	All grease removed + NSK K1™

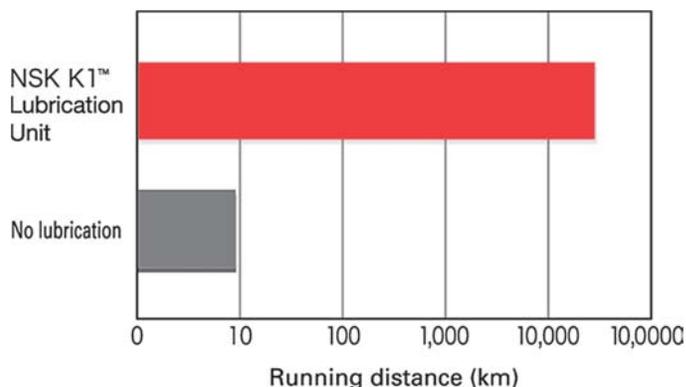

Results of High-Speed Durability Test of Ball Screws Without Lubricant

NSK K1™ Lubrication Unit for food processing is available

For safety equipment of food processing and medical care, NSK provides the Monocarrier™ equipped with special NSK K1™ Lubrication Unit that is made of compatible material under FDA regulations.

Dimensions are the same as the standard NSK K1™ Lubrication Unit and special handling care is not required.

5.5 NSK Clean Grease LG2 Specification

Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean rooms. Compared to the fluoride grease that is commonly used in clean rooms, LG2 has several advantages such as: higher in lubrication function, longer lubrication life, more stable torque (resistant to wear) and higher rust prevention.

In dust generation, LG2 is more than equal to fluoride grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general grease.

Applications

LG2 is lubrication grease for rolling contact machine components such as linear guides and ball screws for processing equipment for semiconductors and LCD which require a highly clean environment at normal pressures at normal temperatures. It cannot be used in a vacuum environment.

Nature

Thickener	Lithium soap base
Base oil	Mineral oil + Synthetic hydrocarbon oil
Consistency	199
Dropping point	201°C
Volume of evaporation	1.40% (99°C, 22hr)
Copper plate corrosion test	Satisfactory (Method B, 100°C, 24hr)
Oil separation	0.8% (100°C, 24hr)
Base oil kinematic viscosity	32mm ² /s (40°C)

NSK Sales Offices – Europe, Middle East and Africa

UK

NSK UK Ltd.
Northern Road, Newark
Nottinghamshire NG24 2JF
Tel. +44 (0) 1636 605123
Fax +44 (0) 1636 643276
info-uk@nsk.com

France & Benelux

NSK France S.A.S.
Quartier de l'Europe
2, rue Georges Guynemer
78283 Guyancourt Cedex
Tel. +33 (0) 1 30573939
Fax +33 (0) 1 30570001
info-fr@nsk.com

Germany, Austria, Switzerland, Nordic

NSK Deutschland GmbH
Harkortstraße 15
40880 Ratingen
Tel. +49 (0) 2102 4810
Fax +49 (0) 2102 4812290
info-de@nsk.com

Italy

NSK Italia S.p.A.
Via Garibaldi, 215
20024 Garbagnate
Milanese (MI)
Tel. +39 02 995 191
Fax +39 02 990 25 778
info-it@nsk.com

Middle East

NSK Bearings Gulf Trading Co.
JAFZA View 19, Floor 24 Office 2/3
Jebel Ali Downtown,
PO Box 262163
Dubai, UAE
Tel. +971 (0) 4 804 8205
Fax +971 (0) 4 884 7227
info-me@nsk.com

Poland & CEE

NSK Polska Sp. z o.o.
Warsaw Branch
Ul. Migdałowa 4/73
02-796 Warszawa
Tel. +48 22 645 15 25
Fax +48 22 645 15 29
info-pl@nsk.com

Russia

NSK Polska Sp. z o.o.
Russian Branch
Office 1 703, Bldg 29,
18th Line of Vasilievskiy Ostrov,
Saint-Petersburg, 199178
Tel. +7 812 3325071
Fax +7 812 3325072
info-ru@nsk.com

South Africa

NSK South Africa (Pty) Ltd.
25 Galaxy Avenue
Linbro Business Park
Sandton 2146
Tel. +27 (011) 458 3600
Fax +27 (011) 458 3608
nsk-sa@nsk.com

Spain

NSK Spain, S.A.
C/ Tarragona, 161 Cuerpo Bajo
2ª Planta, 08014 Barcelona
Tel. +34 93 2892763
Fax +34 93 4335776
info-es@nsk.com

Turkey

NSK Rulmanları Orta Doğu Tic. Ltd. Şti
19 Mayıs Mah. Atatürk Cad.
Ulya Engin İş Merkezi No: 68/3 Kat. 6
P.K.: 34736 - Kozyatağı - İstanbul
Tel. +90 216 4777111
Fax +90 216 4777174
turkey@nsk.com

Please also visit our website: www.nsk europe.com

Global NSK: www.nsk.com

