



## NSK LINEAR GUIDES Miniature PU Series/PE Series

NSK Miniature Linear Guides, ideal for semiconductor manufacturing and medical equipment.



SUBSCRIBE TO NSK NEWSLETTER 

# Smooth motion and unprecedented lightness

## The advanced NSK Miniature Linear Guides

The new generation PU series/PE series inherit the outstanding lineage of the NSK miniature linear guides LU series/LE series. Improves dynamic friction characteristics and creates smoother motion with reduced noise intensity. The new design supports a wide variety of applications.

### Features

#### 1. Motion performance

Highly smooth operation is achieved by smooth ball recirculation.

#### 2. Lightweight

The ball slide is designed to be approximately 20% lighter than conventional models\* by using resin.

\*Miniature LU series/LE series

#### 3. Reduced noise intensity

Resin components applied in the ball circulating system reduce collision noise between steel balls and the inner wall of circulating circuits.

#### 4. Low particle generation

The new design generates less particles compared to conventional models.

#### 5. Excellent particle resistance

Compact space between the side of the rails and the inner walls of the ball slide prevents the entrance of foreign matter.

#### 6. High corrosion resistance

Stainless steel is a standard feature that provides excellent corrosion resistance.

#### 7. Easy handling

Design prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.

#### 8. Long-term maintenance-free

Equipped with NSK K1™ Lubrication unit to extend product life.

#### 9. Fast delivery

Wide selection of interchangeable rails and ball slides for PU/PE Series.

### Miniature PU (Interchangeable with LU Series)



### Wide Miniature PE (Interchangeable with LE Series)






PU09TR



PE09TR

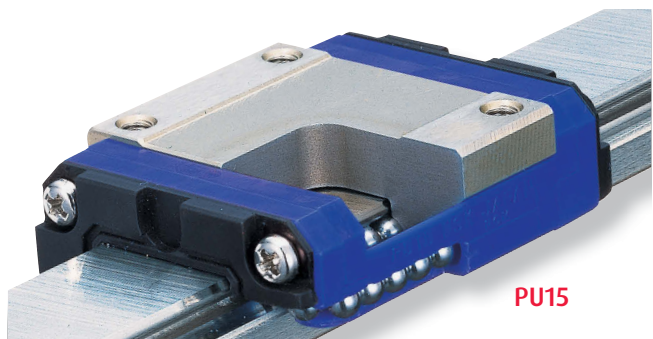

PU15

Cutaway View

## Smoother motion

The resin ball recirculation component creates an optimal configuration, resulting in smoother motion.

Test conditions: Oil lubrication (VG68)  
 Operating speed: 1 000 mm/min  
 Load cell rated capacity: 5N

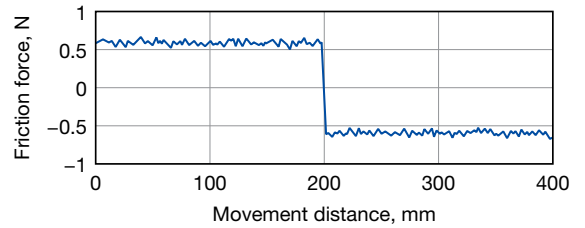


Fig. 1-1 Fluctuations in Dynamic Friction

## Low particle generation

The PU series/PE series, with resin ball recirculation components, generates less particles than a conventional ball recirculation system.

Test conditions: Grease lubrication (LG2)  
 Operating speed: 600 mm/min  
 Stroke: 200 mm

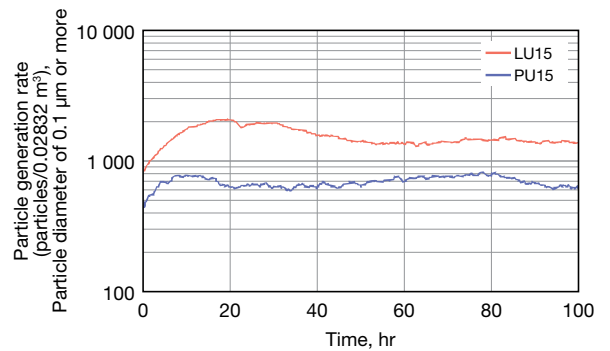


Fig. 1-2 Particle Generation Rate

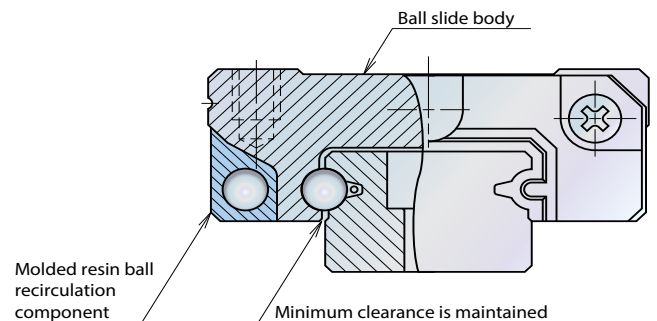



Fig. 2 Cross Sectional Front View

Developed for precision positioning tables, supporting cutting-edge equipment, including semiconductor manufacturing and medical devices

## Reference Number


Reference numbers will be used as reference before finalizing all specifications. Please specify the reference number, except design serial number, to identify the product when ordering, requesting estimates, or inquiring about specifications from NSK.

### Preloaded Assembly Type

<b>PU</b>	<b>15</b>	<b>0470</b>	<b>AL</b>	<b>K</b>	<b>2</b>	<b>-</b> 	<b>P5</b>	<b>1</b>
<b>SERIES NAME</b>	<b>SIZE</b>	<b>RAIL LENGTH (MM)</b>	<b>BALL SLIDE SHAPE CODE</b>	<b>MATERIAL/SURFACE TREATMENT CODE</b> K: Stainless Steel H: Stainless Steel + surface treatment	<b>NUMBER OF BALL SLIDES PER RAIL</b>	<b>DESIGN SERIAL NUMBER</b>	<b>ACCURACY CODE</b> P4: Super Precision P5: High Precision P6: Precision PN: Normal K4: Super Precision with K1 K5: High Precision with K1 K6: Precision with K1 KN: Normal with K1	<b>PRELOAD CODE</b> 0: Fine Clearance - Z0 1: Slight Preload - Z1

### Interchangeable Type

Reference number for rail and ball slide assembly

<b>PU</b>	<b>15</b>	<b>0470</b>	<b>AL</b>	<b>K</b>	<b>2</b>	<b>-</b> 	<b>PC</b>	<b>T</b>
<b>SERIES NAME</b>	<b>SIZE</b>	<b>RAIL LENGTH (MM)</b>	<b>BALL SLIDE SHAPE CODE</b>	<b>MATERIAL/SURFACE TREATMENT CODE</b> K: Stainless Steel H: Stainless Steel + surface treatment	<b>NUMBER OF BALL SLIDES PER RAIL</b>	<b>DESIGN SERIAL NUMBER</b>	<b>ACCURACY CODE</b> PC: Normal KC: Normal with K1	<b>PRELOAD CODE</b> T: Fine Clearance - ZT

Reference number for ball slide of interchangeable type

<b>PAU</b>	<b>15</b>	<b>AL</b>	<b>S</b>	<b>-</b>	<b>K</b>
<b>SERIES CODE</b> PAU: PU Series Interchangeable Ball Slide PAE: PE Series Interchangeable Ball Slide	<b>SIZE</b>	<b>BALL SLIDE SHAPE CODE</b>	<b>MATERIAL CODE</b> S: Stainless Steel		<b>OPTION CODE</b> K: Equipped with K1

## Reference number for rail of interchangeable type

<b>P1U</b>	<b>15</b>	<b>0470</b>	<b>R</b>	<b>K</b>	<b>N</b>	<b>-</b>	<b>PC</b>	<b>T</b>
<b>SERIES CODE</b> P1U: PU Series Interchangeable Rail P1E: PE Series Interchangeable Rail	<b>SIZE</b>	<b>RAIL LENGTH (MM)</b>	<b>RAIL SHAPE CODE</b> S: PU09-12 R: PU15, PE09, 12 P: PE15	<b>MATERIAL/SURFACE TREATMENT CODE</b> K: Stainless Steel H: Stainless Steel + surface treatment	<b>BUTTING SPECIFICATION</b> N: Non-butting rails L: Butting specification	<b>DESIGN SERIAL NUMBER</b>	<b>ACCURACY CODE</b> PC: Normal	<b>PRELOAD CODE</b> T: Fine Clearance - ZT

\* Please consult NSK for butting rail specification.

## Accuracy Standard

We offer the following accuracy grades: Super precision grade P4, High precision grade P5, Precision grade P6, and Normal grade PN for preloaded assembly type, and Normal grade PC for interchangeable type.

**Table 1 Tolerance of preloaded assembly**

Unit:  $\mu\text{m}$

Characteristics	Accuracy grade			
	Super precision P4	High precision P5	Precision grade P6	Normal grade PN
Mounting height H	$\pm 10$	$\pm 15$	$\pm 20$	$\pm 40$
Variation of H (All ball slides on a set of rails)	5	7	15	25
Mounting width $W_2$ or $W_3$	$\pm 15$	$\pm 20$	$\pm 30$	$\pm 50$
Variation of $W_2$ or $W_3$ (All ball slides on reference rail)	7	10	20	30
Running parallelism of surface C to surface A	Shown in Table 3, Fig. 3, Fig. 4			
Running parallelism of surface D to surface B				

**Table 3 Running parallelism of ball slide**

Unit:  $\mu\text{m}$

Rail length (mm)	Accuracy grade		Preloaded assembly type				Interchangeable type
	over	to (incl)	P4	P5	P6	PN	PC
	50		2	2	4.5	6	6
50	80		2	3	5	6	6
80	125		2	3.5	5.5	6.5	6.5
125	200		2	4	6	7	7
200	250		2.5	5	7	8	8
250	315		2.5	5	8	9	9
315	400		3	6	9	11	11
400	500		3	6	10	12	12
500	630		3.5	7	12	14	14
630	800		4.5	8	14	16	16
800	1 000		5	9	16	18	18
1 000	1 250		6	10	17	20	20


**Table 2 Tolerance of interchangeable type:  
Normal grade PC**

Unit:  $\mu\text{m}$


Characteristics	Accuracy grade	Normal grade
	PC	
Mounting height H		$\pm 20$
Variation of mounting height H		15 <sup>1)</sup> 30 <sup>2)</sup>
Mounting width $W_2$ or $W_3$		$\pm 20$
Variation of mounting width $W_2$ or $W_3$		20
Running parallelism of surface C to surface A	Shown in Table 3, Fig. 3, Fig. 4	
Running parallelism of surface D to surface B		

<sup>1)</sup> Variation on the same rail

<sup>2)</sup> Variation on multiple rails



**Fig. 3 Assembled Accuracy  
Mounting width  $W_2$**



**Fig. 4 Assembled Accuracy  
Mounting width  $W_3$**

## Preload and Rigidity

We offer three levels of preload: Slight preload (Z1) and Fine clearance (Z0) for preloaded assembly types, along with interchangeable types of Fine clearance (ZT). Values for preload and rigidity of the preloaded assembly types are shown in Tables 4 and 5.

**Table 4 Preload and rigidity of preloaded assembly of PU series**

	Model No.	Preload (N)		Rigidity (N / $\mu$ m)	
		Slight preload (Z1)		Slight preload (Z1)	
Standard type	PU05TR	0 - 3		17	
	PU07AR	0 - 8		22	
	PU09TR	0 - 10		30	
	PU12TR	0 - 17		33	
	PU15AL	0 - 33		45	
High-load type	PU09UR	0 - 14		46	
	PU12UR	0 - 25		52	
	PU15BL	0 - 51		75	

Clearance of fine clearance Z0 is 0-3  $\mu$ m. Therefore, preload is zero. Clearance values of the interchangeable types are shown in Tables 6 and 7.

**Table 6 Clearance of interchangeable type of PU Series**

Unit: $\mu$ m			
	Model No.	Fine clearance ZT	
Standard type	PU09TR PU12TR PU15AL	3 or less	
	High-load type	PU09UR PU12UR PU15BL	5 or less

**Table 5 Preload and rigidity of preloaded assembly of PE series**

	Model No.	Preload (N)		Rigidity (N / $\mu$ m)	
		Slight preload (Z1)		Slight preload (Z1)	
Standard type	PE05AR	0 - 28		45	
	PE07TR	0 - 29		46	
	PE09TR	0 - 37		61	
	PE12AR	0 - 40		63	
	PE15AR	0 - 49		66	
High-load type	PE09UR	0 - 54		86	
	PE12BR	0 - 59		97	
	PE15BR	0 - 75		114	

**Table 7 Clearance of interchangeable type of PE Series**

Unit: $\mu$ m			
	Model No.	Fine clearance ZT	
Standard type	PE09TR PE12AR PE15AR	3 or less	
	High-load type	PE09UR PE12BR PE15BR	5 or less

## Shoulder Height H of the Mounting Surface and Corner Radius r

Figs. 5, 6 and Tables 8, 9 show the shoulder height and corner radius dimensions.

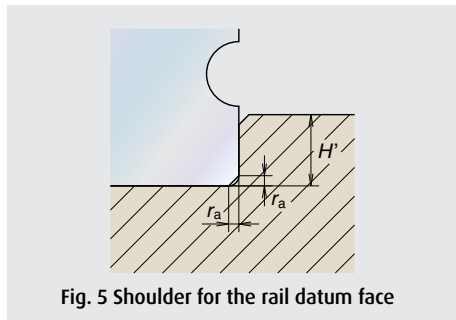


Fig. 5 Shoulder for the rail datum face

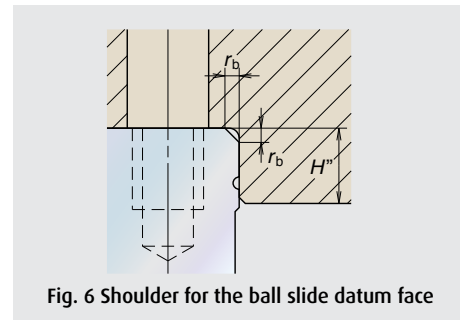


Fig. 6 Shoulder for the ball slide datum face

**Table 8 Shoulder height H of the mounting surface and corner radius r (PU Series)**

Model No.	Corner radius (Maximum)		Shoulder height	
	$r_a$	$r_b$	$H'$	$H''$ ( $^{\circ}$ )
	PU05	0.2	0.2	0.7
PU07	0.2	0.3	1.2	2.5
PU09	0.3	0.3	1.9	2.6
PU12	0.3	0.3	2.5	3.4
PU15	0.3	0.5	3.5	4.4

( $^{\circ}$ ) $H''$  is the minimum recommended value based on the dimension T in Table 13.

**Table 9 Shoulder height H of the mounting surface and corner radius r (PE Series)**

Model No.	Corner radius (Maximum)		Shoulder height	
	$r_a$	$r_b$	$H'$	$H''$ ( $^{\circ}$ )
	PE05	0.2	0.2	1.1
PE07	0.2	0.3	1.7	3.0
PE09	0.3	0.3	3.5	2.8
PE12	0.3	0.3	3.5	3.2
PE15	0.3	0.5	3.5	4.1

( $^{\circ}$ ) $H''$  is the minimum recommended value based on the dimension T in Table 14.


## Lubrication

**Selection of grease:** Table 10 shows grease that is suitable for the PU series/PE series. NSK recommends PS2 as the standard grease for our miniature linear guides.

**Table 10 Available Greases**

Grease code	Thickener	Base oil	Base oil kinematic viscosity mm <sup>2</sup> /s (40°C)	Temperature range for use (°C)	Characteristic/Application
PS2	Lithium type	Synthetic oil + Synthetic hydrocarbon oil	15.9	-50 to 110	<ul style="list-style-type: none"> <li>• For low temperature operation</li> <li>• Suitable for high speed and light load application</li> </ul>
LG2	Lithium type	Mineral oil + Synthetic hydrocarbon oil	32.0	-20 to 70	<ul style="list-style-type: none"> <li>• For clean environment</li> </ul>
LGU	Diurea type	Synthetic hydrocarbon oil	95.8	-30 to 120	<ul style="list-style-type: none"> <li>• For clean environment</li> </ul>

**Long term maintenance free:** NSK K1™ Lubrication unit enables long term maintenance free operation.

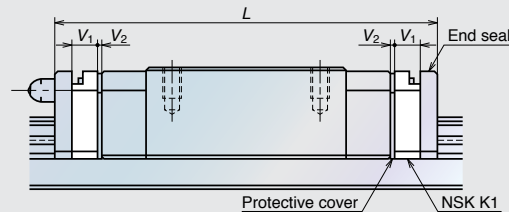

**Table 11 Dimensions when equipped with NSK K1™ (PU Series)**

Unit: mm

	Model No.	Standard ball slide length	Ball slide length equipped with two NSK K1, L	Thickness of NSK K1, V <sub>1</sub>	Thickness of protective cover, V <sub>2</sub>
Standard type	PU05TR	19.4	24.4	2	0.5
	PU07AR	23.4	29.4	2.5	0.5
	PU09TR	30	36.4	2.7	0.5
	PU12TR	35	42	3	0.5
	PU15AL	43	51.2	3.5	0.6
High-load type	PU09UR	41	47.4	2.7	0.5
	PU12UR	48.7	55.7	3	0.5
	PU15BL	61	69.2	3.5	0.6

**Table 12 Dimensions when equipped with NSK K1™ (PE Series)**

Unit: mm

	Model No.	Standard ball slide length	Ball slide length equipped with two NSK K1, L	Thickness of NSK K1, V <sub>1</sub>	Thickness of protective cover, V <sub>2</sub>
Standard type	PE05AR	24.1	28.9	2	0.4
	PE07TR	31.1	37.1	2.5	0.5
	PE09TR	39.8	46.8	3	0.5
	PE12AR	45	53	3.5	0.5
	PE15AR	56.6	66.2	4	0.8
High-load type	PE09UR	51.2	58.2	3	0.5
	PE12BR	60	68	3.5	0.5
	PE15BR	76	85.6	4	0.8

Ball slide length equipped with NSK K1™ = (Standard ball slide length) + (Thickness of NSK K1™, V<sub>1</sub> × Number of NSK K1™) + (Thickness of the protective cover, V<sub>2</sub> × 2)  
 Additional NSK K1™ units are available depending on the conditions of use.

## Particle Resistance

**End seal:** Installed on both sides of the ball slide are a standard feature.

**Bottom seal function:** It is designed to minimize the clearance between the side faces of rail and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

## Applications

- › **Smoother motion and low particle generation**  
Liquid crystal manufacturing and printed circuit board manufacturing devices
- › **Lightweight and low particle generation**  
Semiconductor manufacturing devices (mounter, die bonder, and exposure device)
- › **Gentler tone and excellent particle resistant features**  
Medical machinery and various precision devices

# Dimensions

## Rail and ball slide assembly (preloaded type, interchangeable type)

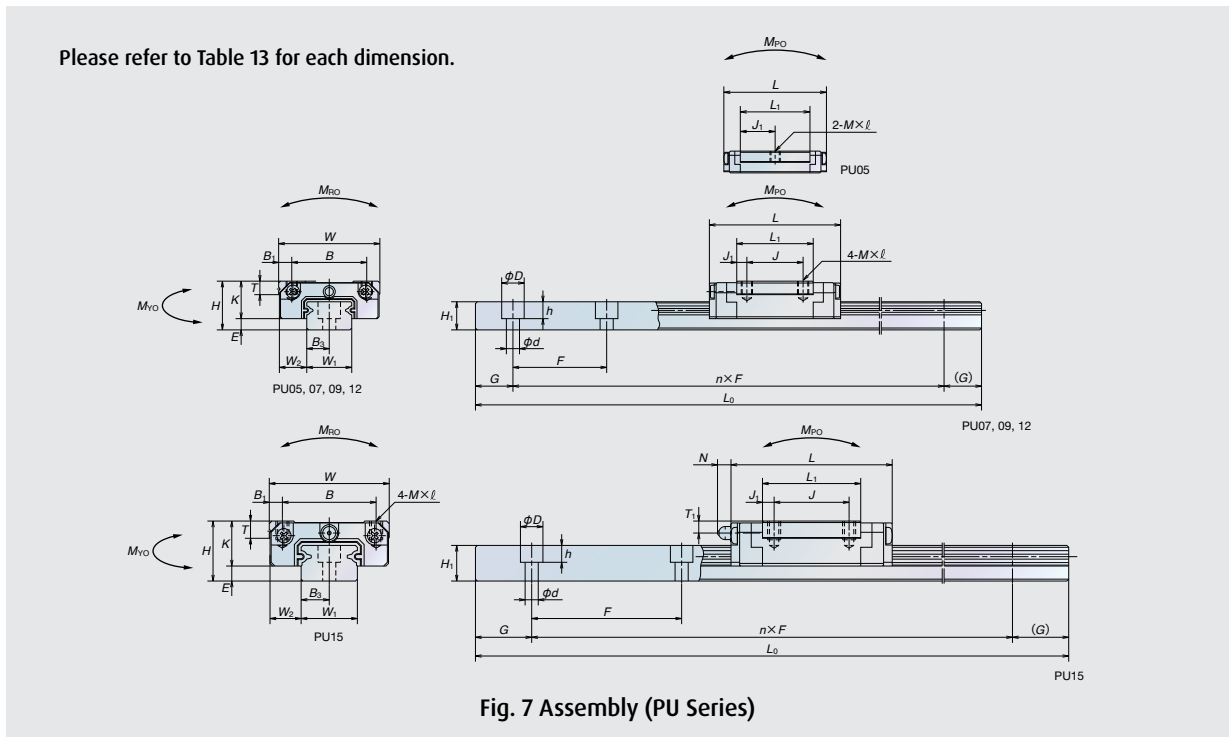


Table 13 Dimensions (PU Series)

Model No.	Interchangeable type	Assembly			Ball slide											Rail				
		Height	E	W <sub>2</sub>	Width	Length	Mounting hole			B <sub>1</sub>	L <sub>1</sub>	J <sub>1</sub>	K	T	Oil hole			Width	Height	Pitch
							W	L	B						J	M×Pitch×ℓ	Hole diameter			
PU05TR	—	6	1.0	3.5	12	19.4	8	—	M2×0.4×1.5	2.0	11.4	5.70	5.0	2.30	Ø0.9	1.5	—	5	3.2	15
PU07AR	—	8	1.5	5.0	17	23.4	12	8	M2×0.4×2.4	2.5	13.3	2.65	6.5	2.45	Ø1.5	1.8	—	7	4.7	15
PU09TR	■	10	2.2	5.5	20	30.0	15	10	M3×0.5×3	2.5	19.6	4.80	7.8	2.60	—	—	—	9	5.5	20
PU09UR	■	10	2.2	5.5	20	41.0	16	16	M3×0.5×3	2.5	30.6	7.30	7.8	2.60	—	—	—	9	5.5	20
PU12TR	■	13	3.0	7.5	27	35.0	20	15	M3×0.5×3.5	3.5	20.4	2.70	10.0	3.40	—	—	—	12	7.5	25
PU12UR	■	13	3.0	7.5	27	48.7	20	20	M3×0.5×3.5	3.5	34.1	7.05	10.0	3.40	—	—	—	12	7.5	25
PU15AL	■	16	4.0	8.5	32	43.0	25	20	M3×0.5×5	3.5	26.2	3.10	12.0	4.40	Ø3 (1)	3.2	(3.6)	15	9.5	40
PU15BL	■	16	4.0	8.5	32	61.0	25	25	M3×0.5×5	3.5	44.2	9.60	12.0	4.40	Ø3 (1)	3.2	(3.6)	15	9.5	40

■: Interchangeable type is available.

(1) Drive-In grease fitting for Ø3 is available to PU15.

(2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface. To convert C to C<sub>100</sub> for a 100-km rating fatigue life, divide C by 1.26.

Table 14 Dimensions (PE Series)

Model No.	Interchangeable type	Assembly			Ball slide											Rail				
		Height	E	W <sub>2</sub>	Width	Length	Mounting hole			B <sub>1</sub>	L <sub>1</sub>	J <sub>1</sub>	K	T	Oil hole			Width	Height	B <sub>2</sub>
							W	L	B						J	M×Pitch×ℓ	Hole diameter			
PE05AR	—	6.5	1.4	3.5	17	24.1	13	—	M2.5×0.45×1.5	2.0	16.4	8.2	5.1	2.5	Ø0.9	1.3	—	10	4.0	—
PE07TR	—	9.0	2.0	5.5	25	31.1	19	10	M3×0.5×2.8	3.0	20.8	5.4	7.0	3.0	Ø1.9	1.9	—	14	5.2	—
PE09TR	■	12.0	4.0	6.0	30	39.8	21	12	M3×0.5×3	4.5	26.6	7.3	8.0	2.8	Ø2.0	2.3	—	18	7.5	—
PE09UR	■	12.0	4.0	6.0	30	51.2	23	24	M3×0.5×3	3.5	38.0	7.0	8.0	2.8	Ø2.0	2.3	—	18	7.5	—
PE12AR	■	14.0	4.0	8.0	40	45.0	28	15	M3×0.5×4	6.0	31.0	8.0	10.0	3.2	Ø2.5	2.7	—	24	8.5	—
PE12BR	■	14.0	4.0	8.0	40	60.0	28	28	M3×0.5×4	6.0	46.0	9.0	10.0	3.2	Ø2.5	2.7	—	24	8.5	—
PE15AR	■	16.0	4.0	9.0	60	56.6	45	20	M4×0.7×4.5	7.5	38.4	9.2	12.0	4.1	Ø3.0 (3)	3.2	(3.3)	42	9.5	23
PE15BR	■	16.0	4.0	9.0	60	76.0	45	35	M4×0.7×4.5	7.5	57.8	11.4	12.0	4.1	Ø3.0 (3)	3.2	(3.3)	42	9.5	23

■: Interchangeable type is available.

(3) Drive-In grease fitting for Ø3 is available to PE15.

(4) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface. To convert C to C<sub>100</sub> for a 100-km rating fatigue life, divide C by 1.26.



Please refer to Table 14 for each dimension.

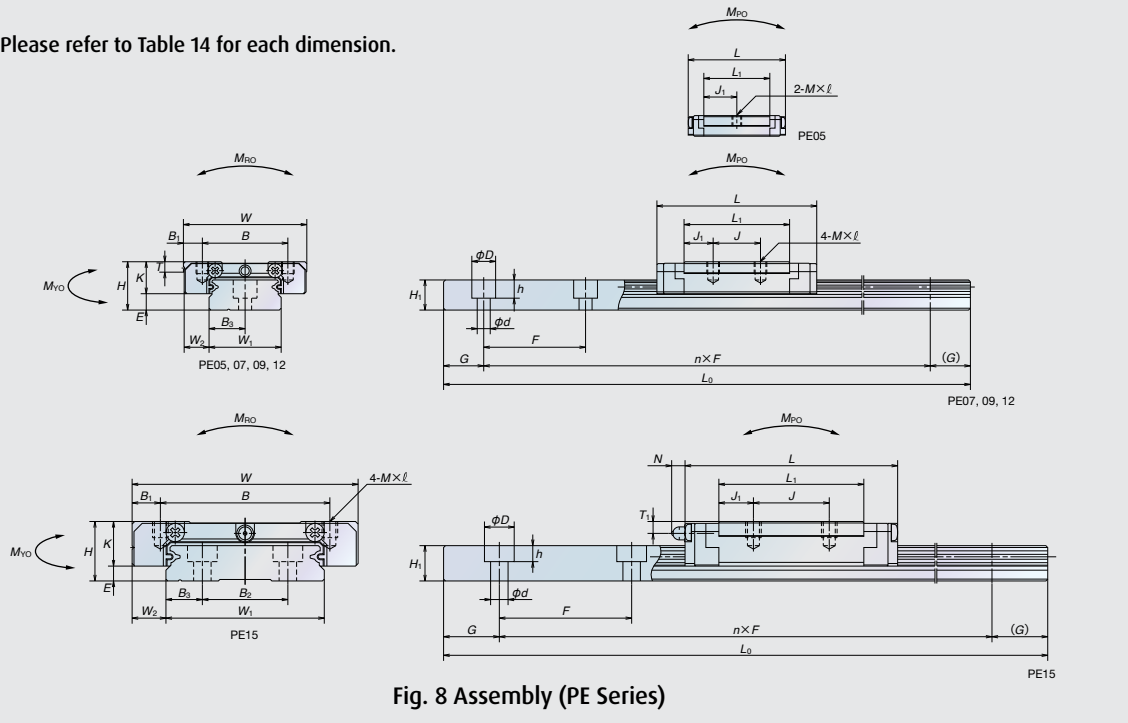


Fig. 8 Assembly (PE Series)

Unit: mm

Rail				Basic Load rating ( <sup>2</sup> )								Weight	
Mounting bolt hole d×D×h	B <sub>3</sub>	G (Reference)	Maximum length L <sub>0max</sub>	Dynamic	Static	M <sub>RO</sub>	Static moment (N-m)				Ball diameter D <sub>w</sub>	Weight	
				C (N)	C <sub>0</sub> (N)		M <sub>PO</sub>		M <sub>YO</sub>			Ball slide (g)	Rail (g/100 mm)
							one slide	two slides in close contact	one slide	two slides in close contact			
2.3×3.3×0.8	2.5	5.0	210	520	775	2.06	1.28	9.90	1.28	9.90	1.0000	4	11
2.4×4.2×2.3	3.5	5.0	375	1 090	1 370	5.20	2.70	21.80	2.70	21.8	1.5875	8	23
3.5×6×4.5	4.5	7.5	600	1 490	2 150	9.90	6.10	41.00	6.10	41.0	1.5875	16	35
				2 100	3 500	16.20	15.60	88.00	15.60	88.0			
3.5×6×4.5	6.0	10.0	800	2 830	3 500	21.10	11.40	73.50	11.40	73.5	2.3812	32	65
				4 000	5 700	34.50	28.30	174.00	28.30	174.0			
3.5×6×4.5	7.5	15.0	1 000	5 550	6 600	49.50	25.60	190.00	25.60	190.0	3.1750	59	105
				8 100	11 300	84.50	69.50	435.00	69.50	435.0			

To fix rails of PU05TR, use M2 × 0.4 cross-recessed pan head machine screw for precision instrument.  
(JCS 10-70 No. 0 pan head machine screw No. 1) (JCS: Japanese Camera Industrial Standard)

Unit: mm

Rail					Basic load rating ( <sup>4</sup> )								Weight	
Pitch F	Mounting bolt hole d×D×h	B <sub>3</sub>	G (Reference)	Maximum length L <sub>0max</sub>	Dynamic	Static	M <sub>RO</sub>	Static moment (N-m)				Ball diameter D <sub>w</sub>	Weight	
					C (N)	C <sub>0</sub> (N)		M <sub>PO</sub>		M <sub>YO</sub>			Ball slide (g)	Rail (g/100 mm)
								one slide	two slides in close contact	one slide	two slides in close contact			
20	3×5×1.6	5.0	7.5	150	690	1 160	6.0	2.75	17.5	2.75	17.5	1.0000	7	34
30	3.5×6×3.2	7.0	10.0	600	1 580	2 350	16.7	7.20	46.0	7.20	46.0	1.5875	19	55
30	3.5×6×4.5	9.0	10.0	800	3 000	4 500	36.5	17.3	113.0	17.3	113.0	2.0000	35	95
					4 000	6 700	54.5	37.5	210.0	37.5	210.0			
40	4.5×8×4.5	12.0	15.0	1 000	4 350	6 350	70.5	29.3	180.0	29.3	180.0	2.3812	66	140
					5 800	9 550	106.0	63.5	345.0	63.5	345.0			
40	4.5×8×4.5	9.5	15.0	1 200	7 600	10 400	207.0	59.0	370.0	59.0	370.0	3.1750	140	275
					10 300	16 000	320.0	135.0	740.0	135.0	740.0			

To fix rails of PE05AR, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instrument.  
(JCS 10-70 No. 0 pan head machine screw No. 3) (JCS: Japanese Camera Industrial Standard)

## Interchangeable type

### Ball slide of interchangeable types

Please refer to Table 13 for each dimension.

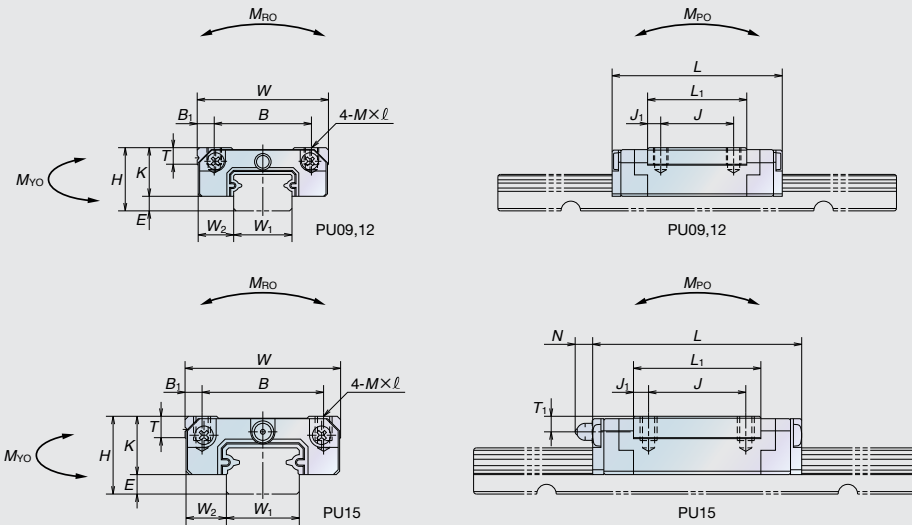


Fig. 9 Ball slide of interchangeable types (PU Series)

Please refer to Table 14 for each dimension.

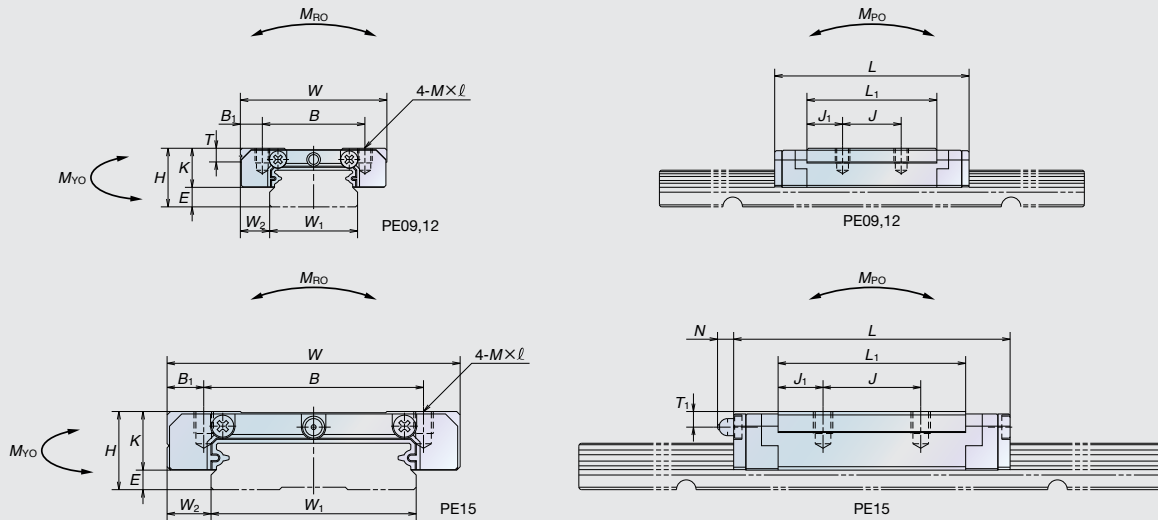


Fig. 10 Ball slide of interchangeable types (PE Series)

## Rail of interchangeable types

Please refer to Table 13 for each dimension.

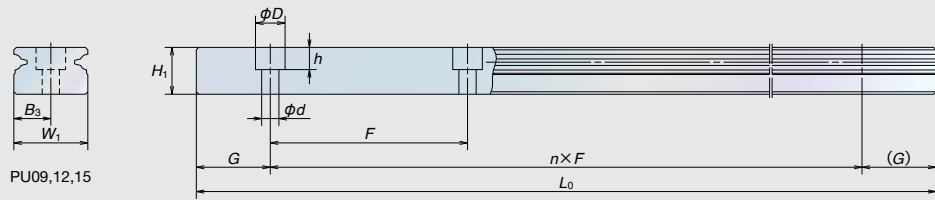


Fig. 11 Rail of interchangeable types (PU Series)

Please refer to Table 14 for each dimension.

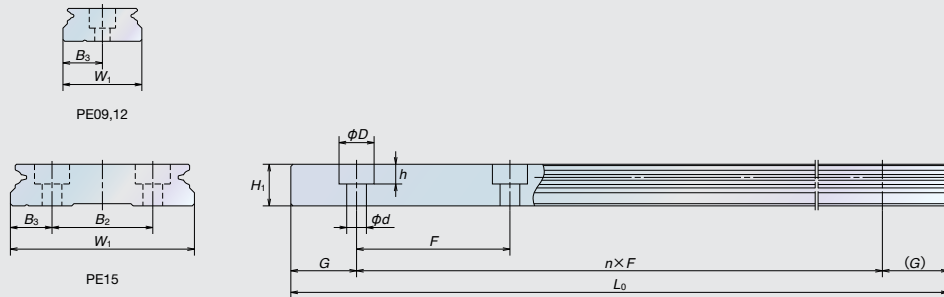


Fig. 12 Rail of interchangeable types (PE Series)

## Interchangeability with LU Series/LE Series

The PU series/PE series is designed to be interchangeable\* with the LU series/LE series for its mounting dimensions and load ratings.

Refer to Figs. 7, 8 and Tables 13, 14 for more details.

(\* ) Load ratings for PU05 and PE05 are not interchangeable

## Handling Precautions

- › NSK Linear Guides may become damaged when struck or hit.
- › Maximum operating temperature must be 80°C or below. Exceeding this limit may damage resin parts.
- › Maximum operating temperature must be 50°C (max. momentary 80°C) when attaching NSK K1™. Also, avoid exposure to organic solvents with a degreasing effect. Do not immerse in kerosene or rust preventative oil (with kerosene ingredients).
- › Handling of interchangeable types
  - Interchangeable ball slide will be delivered on a provisional rail (installing fixture).
  - Be sure to use the provisional rail when mounting ball slide(s) on to a rail.
  - Do not remove the ball slide from provisional rail until sliding on to a rail.

## NSK Sales Offices – Europe, Middle East and Africa

### UK

NSK UK Ltd.  
Northern Road, Newark  
Nottinghamshire NG24 2JF  
Tel. +44 (0) 1636 605123  
Fax +44 (0) 1636 643276  
info-uk@nsk.com

### France & Benelux

NSK France S.A.S.  
Quartier de l'Europe  
2, rue Georges Guynemer  
78283 Guyancourt Cedex  
Tel. +33 (0) 1 30573939  
Fax +33 (0) 1 30570001  
info-fr@nsk.com

### Germany, Austria, Switzerland, Nordic

NSK Deutschland GmbH  
Harkortstraße 15  
40880 Ratingen  
Tel. +49 (0) 2102 4810  
Fax +49 (0) 2102 4812290  
info-de@nsk.com

### Italy

NSK Italia S.p.A.  
Via Garibaldi, 215  
20024 Garbagnate  
Milanese (MI)  
Tel. +39 02 995 191  
Fax +39 02 990 25 778  
info-it@nsk.com

### Middle East

NSK Bearings Gulf Trading Co.  
JAFZA View 19, Floor 24 Office 2/3  
Jebel Ali Downtown,  
PO Box 262163  
Dubai, UAE  
Tel. +971 (0) 4 804 8205  
Fax +971 (0) 4 884 7227  
info-me@nsk.com

### Poland & CEE

NSK Polska Sp. z o.o.  
Warsaw Branch  
Ul. Migdałowa 4/73  
02-796 Warszawa  
Tel. +48 22 645 15 25  
Fax +48 22 645 15 29  
info-pl@nsk.com

### Russia

NSK Polska Sp. z o.o.  
Russian Branch  
Office 1 703, Bldg 29,  
18<sup>th</sup> Line of Vasilievskiy Ostrov,  
Saint-Petersburg, 199178  
Tel. +7 812 3325071  
Fax +7 812 3325072  
info-ru@nsk.com

### South Africa

NSK South Africa (Pty) Ltd.  
25 Galaxy Avenue  
Linbro Business Park  
Sandton 2146  
Tel. +27 (011) 458 3600  
Fax +27 (011) 458 3608  
nsk-sa@nsk.com

### Spain

NSK Spain, S.A.  
C/ Tarragona, 161 Cuerpo Bajo  
2ª Planta, 08014 Barcelona  
Tel. +34 93 2892763  
Fax +34 93 4335776  
info-es@nsk.com

### Turkey

NSK Rulmanları Orta Doğu Tic. Ltd. Şti  
19 Mayıs Mah. Atatürk Cad.  
Ulya Engin İş Merkezi No: 68/3 Kat. 6  
P.K.: 34736 - Kozyatağı - İstanbul  
Tel. +90 216 4777111  
Fax +90 216 4777174  
turkey@nsk.com

Please also visit our website: [www.nsk europe.com](http://www.nsk europe.com)

Global NSK: [www.nsk.com](http://www.nsk.com)

