

**COMPACT AND BACKLASH FREE.**

single-position  
multi-position  
load holding  
full disengagement

# TORQUE LIMITERS

**SERIES SK | 0.1 – 2,800 Nm**



**NEW TORQUE RANGES**



THE ULTIMATE COUPLING FROM 0.1 – 2,800 Nm

[www.rwcouplings.com](http://www.rwcouplings.com)

single-position  
multi-position  
load holding  
full disengagement

# SK SERIES

## BACKLASH-FREE TORQUE LIMITERS FROM R+W

### Reliable Torque Overload Protection

The trend in industry is to design and incorporate more automation into production processes. Machines are becoming more accurate, requiring a higher degree of precision. They are becoming faster, using servo and DC drive technology, and they are more rigid to withstand the dynamic loads necessary to increase capacity and productivity.

Torque overloads caused by material jams, operator error, or a whole host of unforeseen reasons pose a significant threat to machine downtime.

Machine downtime in an automated production environment is very costly. Broken components, expensive technicians, and long lead times for custom components can make the difference between operating profitably or not. Torque overload couplings are an inexpensive insurance against downtime.

This catalog contains many different torque overload coupling designs. They all incorporate the patented R+W design principle. The couplings are all torsionally rigid with absolute zero backlash.

The use of a patented R+W Torque Limiter will isolate the driving from the driven elements within a matter of milliseconds, once the torque reaches a preset overload value. Incorporating **R+W Torque limiting couplings** into modern machine design will help insure high productivity and higher profits.



### Areas of application

- Machine tools
- CNC machining centers
- Woodworking machines
- Automation equipment
- Textile machinery
- Industrial robots
- Sheet metal processing machines
- Printing + Converting machinery
- Servo + DC motor drives

### Features

- Precise overload protection
- Absolutely backlash-free and torsionally rigid (R+W patented principle)
- Compact, simple design
- Disengagement detection is achieved through indexing ring movement
- Low residual friction following disengagement
- Low moment of inertia
- Disengagement within msec

### Table of contents

Coupling designs	Page 3
Overview of available function systems	Page 4/5
Torque limiter <b>model SK 1 / SKP</b> Single-position, multi-position, load holding, full disengagement versions	Page 6/7
Torque limiter <b>model SK 2</b> Single-position, multi-position, load holding, full disengagement versions	Page 8
Torque limiter <b>model SK 3</b> Single-position, multi-position, load holding, full disengagement versions	Page 9
Torque limiter <b>model SK 5</b> Single-position, multi-position, load holding, full disengagement versions	Page 10/11
Accessories	Page 12
General function	Page 13/14
Assembly and disassembly	Page 15
Important additional information	Page 16
Selection	Page 17/18
Important additional information	Page 19
Product range	Page 20

single-position  
multi-position  
load holding  
full disengagement

## MODELS

## FEATURES


## POSSIBLE APPLICATIONS

### SK 1 / SKP



#### With conical clamp or clamping hub

- Integral bearings for timing belt pulley or sprocket
- Compact, simple design
- Adjustable settings

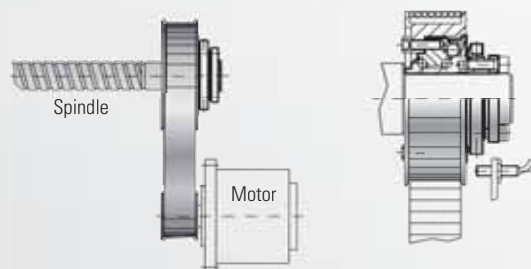


### SK 2



#### With clamping hub for direct drives

- Easy assembly
- Low moment of inertia
- Compact
- Compensates for shaft misalignment
- Adjustable settings

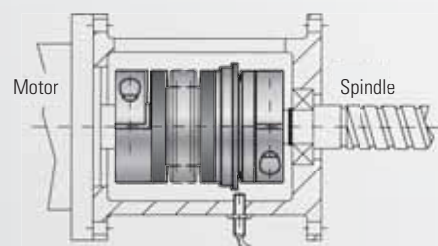


### SK 3



#### With conical clamp connection for direct drives

- High clamping forces
- High degree of operational dependability
- Compensates for shaft misalignment
- Adjustable settings

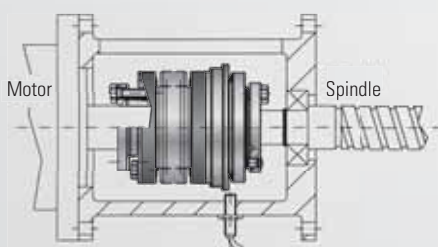


### SK 5



#### With clamping hub, press-fit version for direct drives

- Easy mounting and dismounting
- Electrically and thermally insulated
- Compensates for shaft misalignment
- Adjustable settings

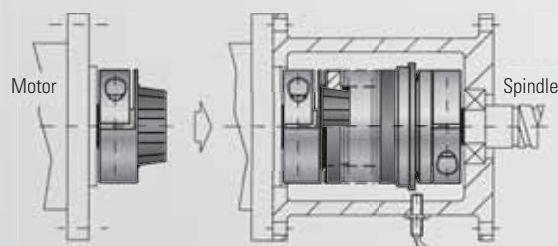


### ES 2



#### With clamping hub, press-fit version for direct drives

- Easy assembly
- Damps vibrations
- Compensates for shaft misalignment
- Adjustable settings

(see separate catalog)

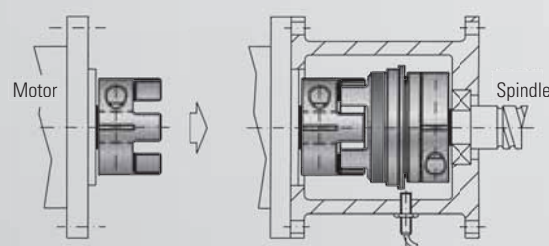


single-position  
multi-position  
load holding  
full disengagement

# OVERVIEW

## BACKLASH-FREE TORQUE LIMITERS FROM R+W

### Single-position re-engagement

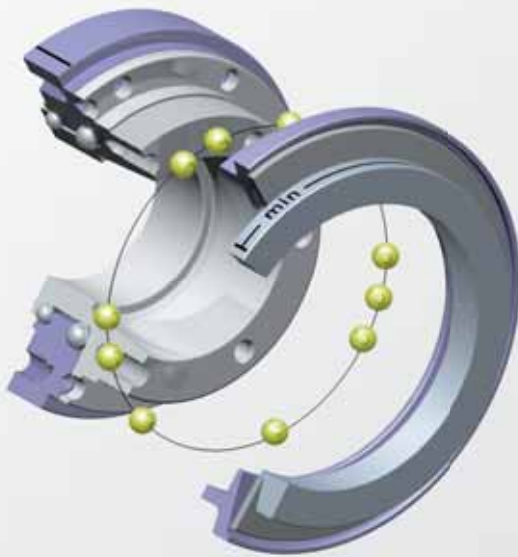

#### Standard version

- After the overload has been removed, the coupling will reengage precisely 360 ° from the original disengagement position.
- Signal at overload
- Suitable for use, in machine tools, packaging machinery, automation systems and other applications requiring precise timing.




Every model in this catalog is available in all 4 versions.

# R+W TORQUE


### Load holding Version

- Mechanical overload detection device
- In the event of a torque overload, the drive and driven elements are not fully separated and are only allowed limited rotation.
- Guaranteed to hold the load and signal an overload.
- Automatic engagement after the torque level has dropped.
- Signal at overload to detect with mechanical switch or proximity sensor.
- Suitable for use, on presses, load lifting equipment or on any applications where the drive and driven elements cannot be separated.

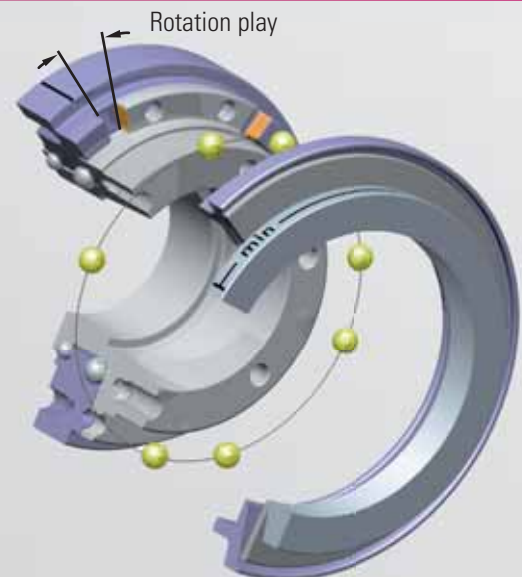

# POSSIBLE FUNCTION SYSTEMS

## Multi-position coupling

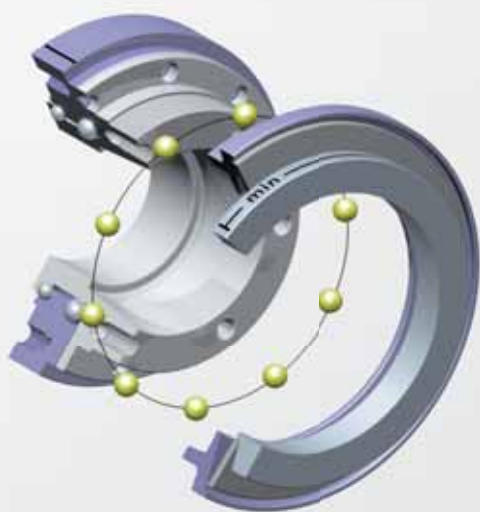


- Coupling re-engages at multiple set angular intervals.
- Immediate availability of the machine as soon as the overload has been removed.
- Signal at overload with mechanical switch or proximity sensor
- Standard engagement every 60°
- Engagement after 30, 45, 90 and 120 degrees optional

# E LIMITERS

## Full disengagement

**Indication:**  
Coupling can be  
disengaged  
manually.  
Please contact  
R+W.

- Permanent separation of drive and driven elements in the event of a torque overload.
- Signal at overload with mechanical switch or proximity sensor
- No residual friction
- Rotating elements slow down freely
- Coupling can be re-engaged manually (Engagement every 60°); other engagements optional
- For use in high speed applications

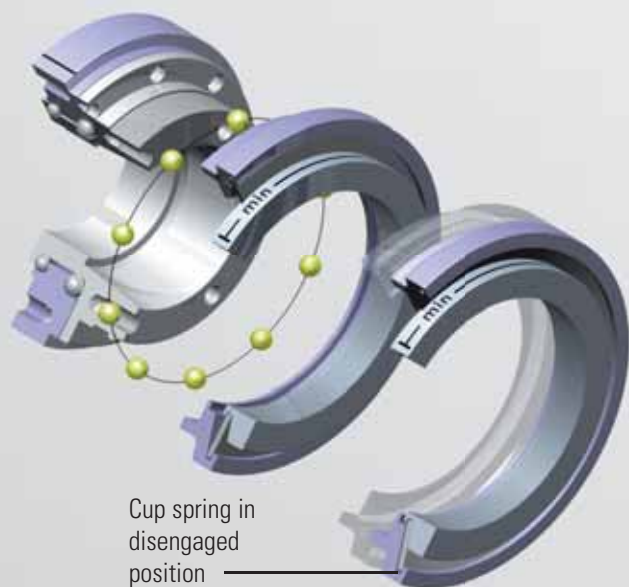




single-position  
multi-position  
load holding  
full disengagement

Model SK1



# MODEL SK1/SKP




## BACKLASH FREE TORQUE LIMITER


with conical clamp connection

### Miniature Design Series 1.5 - 10

SK 1 with clamping hub

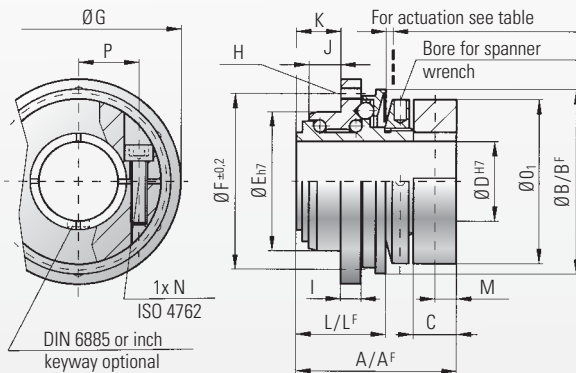


SKP with keyway connection




### Design Series 15-2,500

SK 1 with conical clamp

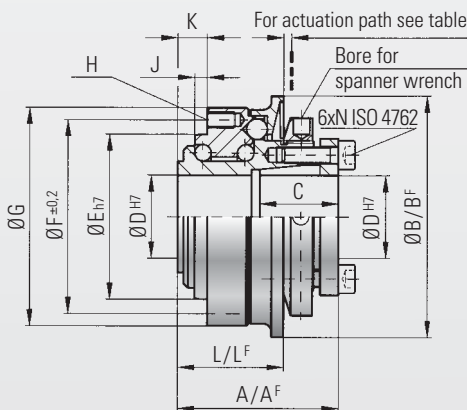

SKP with keyway connection

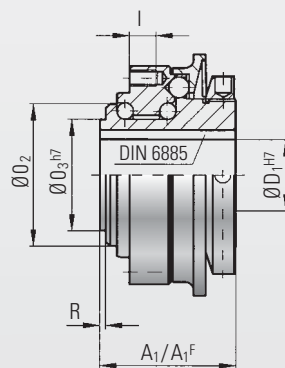

#### Material

High-strength steel

#### Design

Model SK1 from 1.5-10 Nm with clamping hub  
Model SK1 from 15-2,800 Nm with conical clamp  
**Optional clamping hub available upon request**

Model SKP with keyway connection

#### Temperature range:

-30° C to +120° C  
Temperature peaks up to +150° C

#### Backlash:

Absolutely backlash-free as a result of the frictional clamp connection and the patented R+W principle


#### Service life:

These couplings are maintenance-free and have extreme service life as long as all of the ratings are not exceeded.

**Optional sealed version for wash down and foodservice application.**  
See page 16

#### Ordering specifications

SK1 / 10 / W / 14 / 4 / 2-6 / xx

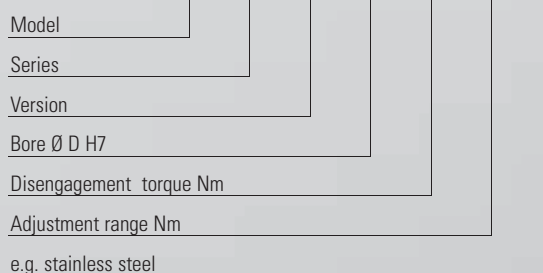


#### Possible versions

- W = Single-position engagement
- D = Multi-position engagement
- G = Load holding
- F = Full disengagement

**For the maximum permissible radial load capacity for all SK 1 / SKP models, see installation instructions on page 14**

optional  
stainless  
steel

single-position  
multi-position  
load holding  
full disengagement



Model SKP

with keyway connection

Model SK 1/SKP		Miniature Design													
		Series													
		1.5	2	4.5	10	15	30	60	150	200	300	500	800	1500	2500
Adjustment range available from - to (approx. values) (Nm)	T <sub>KN</sub>	0.1-0.6 0.4-1 0.8-2	0.2-1.5 0.5-2.2 1.5-3.5	1-3 2-4.5 3-7	2-6 4-12 7-18	5-15 12-25 20-40 35-70	5-20 10-30 20-60 50-100	10-30 20-40 50-115	20-70 45-150 80-225	30-90 60-160 140-280 250-400	100-200 150-240 220-440	80-200 200-350 320-650	400-650 500-800 650-950	600-800 700-1200 1000-1800	1500-2000 2000-2500 2300-2800
Adjustment range available from - to (approx. values) (full disengagement) (Nm)	T <sub>KN</sub>	0.3-0.8 or 0.6-1.3	0.5-2	2.5-4.5	2-5 4-10 8-15	7-15	8-20 or 16-30	10-30 20-40 30-60	20-60 40-80 80-150	80-140 or 130-200	120-180 or 160-300	50-150 100-300 250-500	200-400 or 450-850	1000-1250 or 1250-1500	1400-2200 or 1800-2700
Overall length (mm)	A	23	28	32	39	40	50	54	58	63	70	84	95	109	146
Overall length (full disengagement) (mm)	A <sup>F</sup>	23	28	32	39	40	50	54	58	66	73	88	95	117	152
Overall length A1 (mm)	A <sub>1</sub>	15.5	20	22	28	34	43	46	48.5	54	57	71.5	80	93	135
Overall length A1 (full disengagement) (mm)	A <sub>1</sub> <sup>F</sup>	15.5	20	22	28	34	43	46	48.5	57	60	75	91	110	141
Actuation ring Ø (mm)	B	23	29	35	45	55	65	73	92	99	120	135	152	174	242
Actuation ring Ø (full disengagement) (mm)	B <sup>F</sup>	24	32	42	51.5	62	70	83	98	117	132	155	177	187	258
Clamping fit length (mm)	C	7	8	11	11	19	22	27.5	32	32	41	41	49	61	80
Inner diameter from Ø bis Ø H7 (mm)	D	4-8	4-12	5-14	6-20	8-22	12-22	12-29	15-37	20-44	25-56	25-56	30-60	35-70	50-100
Inner diameter max. Ø H7 (mm)	D <sub>1</sub>	8	10	12	16	19	25.4	30	38	44	50	58	60	73	95
Pilot diameter h7 (mm)	E	14	22	25	34	40	47	55	68	75	82	90	100	125	168
Bolt-hole circle diameter ± 0.2 (mm)	F	22	28	35	43	47	54	63	78	85	98	110	120	148	202
Flange outside diameter -0.2 (mm)	G	26	32	40	50	53	63	72	87	98	112	128	140	165	240
Thread	H	4xM2	4xM2.5	6xM2.5	6xM3	6xM4	6xM5	6xM5	6xM6	6xM6	6xM8	6xM8	6xM10	6xM12	6xM16
Thread depth (mm)	I	3	4	4	5	6	8	9	10	10	10	12	15	16	24
Centering length -0.2 (mm)	J	2.5	3.5	5	8	3	5	5	5	5	6	9	10	13.5	20
Distance (mm)	K	5	6	8	11	8	11	11	12	12	15	21	19	25	34
Distance (mm)	L	11	15	17	22	27	35	37	39	44	47	59	67	82	108
Distance (mm)	L <sup>F</sup>	11.5	16	18	24	27	37	39	41.5	47	51.5	62	75	91	120
Distance (mm)	M	2.5	5	4	5										
Screw ISO 4762	N	M2.5	M3	M4	M4	M4	M5	M5	M6	M6	M8	M8	M10	M12	M16
Tightening torque in (Nm)	N	1	2	4	4.5	4	6	8	12	14	18	25	40	70	120
Outside diameter clamp ring (mm)	O <sub>1</sub>	20	25	32	40										
Diameter (mm)	O <sub>2</sub>	13	18	21	30	35	42	49	62	67	75	84	91	112	154
Diameter h7 (mm)	O <sub>3</sub>	11	14	17	24	27	32	39	50	55	65	72	75	92	128
Distance between centers (mm)	P	6.5	8	10	15										
Distance (mm)	R	1	1.3	1.5	1.5	2.5	2.5	2.5	2.5	3	3	4	4	4.5	6
Moment of inertia (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>ges</sub>	0.01	0.02	0.05	0.07	0.15	0.25	0.50	1.60	2.70	5.20	8.60	20	31.5	210
Approx. weight (kg)		0.03	0.065	0.12	0.22	0.4	0.7	1.0	1.3	2.0	3.0	4.0	5.5	10	28
Actuation path (mm)		0.7	0.8	0.8	1.2	1.5	1.5	1.7	1.9	2.2	2.2	2.2	2.2	3.0	3.0


A<sup>F</sup>, B<sup>F</sup>, L<sup>F</sup> = Full disengagement version



single-position  
multi-position  
load holding  
full disengagement




# MODEL SK2



## BACKLASH FREE TORQUE LIMITER

with clamping hub

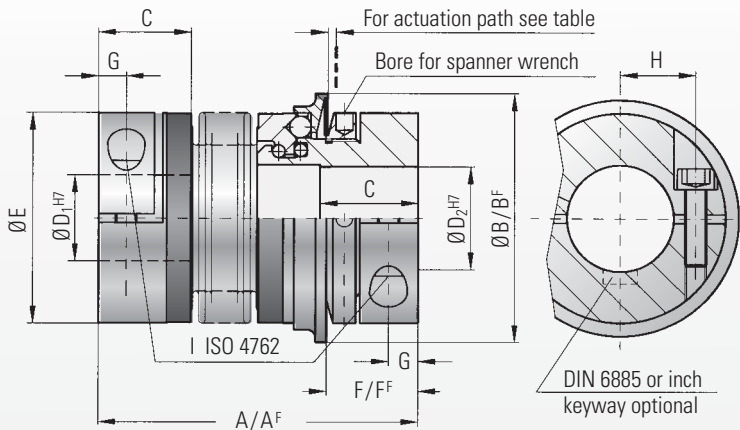

Optional sealed version for wash down and food service application. See page 16.

**Material:**

Bellows made of highly elastic stainless steel  
Torque limiter section: High strength hardened steel  
Hub material: up to series 80 aluminium from series up 150 steel

**Design:**

With a single radial clamping screw per hub

**Temperature range:**

-30° C to +120° C

**Backlash:**

Absolutely backlash free as a result of the frictional clamp connection and the patented R+W principle

**Service life:**

These coupling are maintenance free and have extreme service life as long as the performance limits are not exceeded.

**Fit tolerance:**

Tolerance between hub and shaft 0.01-0.05 mm

**Ordering specifications:**

see page 11

Model SK 2		Series																										
		1.5	2		4.5	10		15		30		60		80		150		200		300		500		800		1500		
Adjustment range available from - to (approx. values) (Nm)	T <sub>KN</sub>	0.1-0.6 0.4-1 0.8-1.5	0.2-1.5 or 0.5-2		1-3 or 3-6	2-6 or 4-12		5-10 or 8-20		10-25 or 20-40		10-30 or 25-80		20-70 or 30-90		20-70 45-150 80-180		30-90 60-160 120-240		100-200 150-240 200-320		80-200 200-350 300-500		400-650 500-800 650-850		650-800 700-1200 1000-1800		
Adjustment range available from - to (approx. values) (full disengagement) (Nm)	T <sub>KN</sub>	0.3-0.8 or 0.6-1.3	0.5-2		2.5-4.5		2-5 or 5-10		7-15		8-20 or 16-30		20-40 or 30-60		20-60 40-80 80-150		20-60 40-80 80-150		80-140 or 130-200		120-180 or 160-300		60-150 100-300 250-500		200-400 or 450-800		1000-1250 or 1250-1500	
Overall length (mm)	A	42	46	51	57	65	65	74	75	82	87	95	102	112	115	127	116	128	128	140	139	153	163	177	190	223		
Overall length, (full disengagement) (mm)	A <sup>F</sup>	42	46	51	57	65	65	74	75	82	87	95	102	112	117	129	118	130	131	143	142	156	167	181	201	232		
Actuation ring Ø (mm)	B	23	29		35	45		55		65		73		92		92		99		120		135		152		174		
Actuation ring Ø (full disengagement) (mm)	B <sup>F</sup>	24	32		42	51.5		62		70		83		98		98		117		132		155		177		187		
Fit length (mm)	C	11	13		16	16		22		27		31		35		35		40		42		51		48		67		
Inner diameter from Ø to Ø H7 (mm)	D <sub>1</sub> /D <sub>2</sub>	3-8	4-12		5-14	6-20		10-26		12-30		15-32		19-42		19-42		24-45		30-60		35-60		40-75		50-80		
Outer diameter of coupling (mm)	E	19	25		32	40		49		55		66		81		81		90		110		123		134		157		
Distance (mm)	F	12	13		15	17		19		24		30		31		31		35		35		45		50		63		
Distance (full disengagement) (mm)	F <sup>F</sup>	11.5	12		14	16		19		22		29		31		30		33		35		43		54		61		
Distance (mm)	G	3.5	4		5	5		6.5		7.5		9.5		11		11		12.5		13		17		18		22.5		
Distance between centers (mm)	H	6	8		10	15		17		19		23		27		27		31		39		41		2x48		2x55		
ISO 4762 screws	I	M2.5	M3		M4	M4		M5		M6		M8		M10		M10		M12		M12		M16		2xM16		2xM20		
Tightening torque (Nm)	I	1	2		4	4.5		8		15		40		50		70		120		130		200		250		470		
Approx. weight (kg)		0.035	0.07		0.2	0.3		0.4		0.6		1.0		2.0		2.4		4.0		5.9		9.6		14		21		
Moment of inertia (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>ges</sub>	0.01	0.01	0.01	0.02	0.02	0.06	0.07	0.10	0.15	0.27	0.32	0.75	0.80	1.80	1.90	2.50	2.80	5.10	5.30	11.5	11.8	22.8	23.0	42.0	83.0		
Torsional stiffness (10 <sup>3</sup> Nm/rad)	C <sub>T</sub>	0.07	1.2	1.3	7	5	9	8	20	15	39	28	76	55	129	85	175	110	191	140	420	350	510	500	780	1304		
Lateral misalignment max. (mm)		0.15	0.15	0.20	0.20	0.25	0.20	0.30	0.15	0.20	0.20	0.25	0.20	0.25	0.20	0.25	0.20	0.25	0.20	0.25	0.25	0.30	0.25	0.30	0.30	0.35	0.35	
Angular misalignment max. (degrees)		1	1	1.5	1.5	2	1.5	2	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5	2	1.5	2	2	2.5	2.5	2.5		
Lateral spring stiffness (N/mm)		70	40	30	290	45	280	145	475	137	900	270	1200	420	920	255	1550	435	2040	610	3750	1050	2500	840	2000	3600		
Actuation path (mm)		0.7	0.8		0.8	1.2		1.5		1.5		1.7		1.9		1.9		2.2		2.2		2.2		2.2		3		


A<sup>F</sup>, B<sup>F</sup>, F<sup>F</sup> = Full disengagement version

(smaller sizes on request)



optional  
stainless  
steel


single-position  
multi-position  
load holding  
full disengagement



# MODEL SK3

## BACKLASH FREE TORQUE LIMITER

with tapered clamp connection

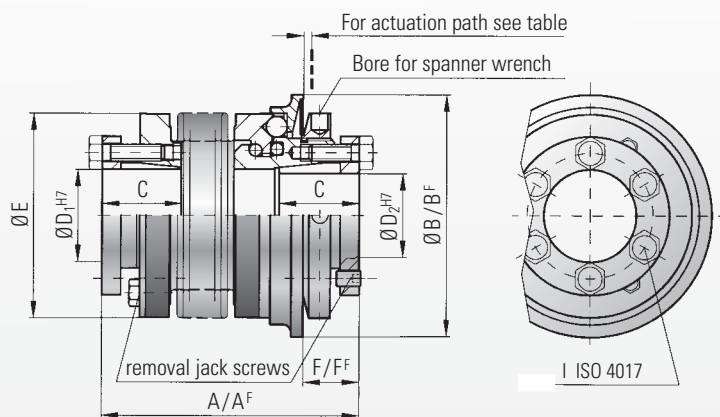

Optional sealed version for wash down and foodservice application. See page 16.

**Material:**

Bellows made of highly elastic stainless steel  
Torque limiter section: High strength hardened steel  
Hub material: Steel

**Design:**

With slotted tapered conical sleeves and removal jack screws

**Temperature range:**

-30° C to +120° C

**Backlash:**

Absolutely backlash free as a result of the frictional clamp connection and the patented R+W principle

**Service life:**

These couplings are maintenance free and have extreme service life as long as the performance limits are not exceeded.

**Fit tolerance:**

Tolerance between hub and shaft 0.01-0.05 mm

**Ordering specifications:**

see page 11

Model SK 3		Series																			
		15		30		60		150		200		300		500		800		1500		2500	
Adjustment range available from (approx. values) (Nm)	$T_{KN}$	5-10 or 8-20		10-25 or 20-40		10-30 or 25-80		20-70 45-150 80-200		30-90 60-160 140-280		100-200 150-240 220-400		80-200 200-350 300-500		400-650 500-800 600-900		650-850 700-1200 1000-1800		1500-2000 2000-2500 2300-2800	
Adjustment range available from (approx. values) (full disengagement) (Nm)	$T_{KN}$	7-15		8-20 or 16-30		20-40 or 30-60		20-60 40-80 80-150		80-140 or 130-200		120-180 or 160-300		60-150 100-300 250-500		200-400 or 450-800		1000-1250 or 1250-1500		1400-2200 or 1800-2700	
Overall length (mm)	A	62	69	72	80	84	94	93	105	99	111	114	128	123	136	151	175	246			
Overall length (full disengagement) (mm)	A <sup>F</sup>	62	69	72	80	84	94	93	105	102	114	117	131	127	140	151	184	252			
Actuation ring Ø (mm)	B	55		65		73		92		99		120		135		152		174		243	
Actuation ring Ø (full disengagement) (mm)	B <sup>F</sup>	62		70		83		98		117		132		155		177		187		258	
Fit length (mm)	C	19		22		27		32		32		41		41		49		61		80	
Inner diameter from Ø to Ø H7 (mm)	D <sub>1</sub> /D <sub>2</sub>	10-22		12-23		12-29		15-37		20-44		25-56		25-60		30-60		35-70		50-100	
Outer diameter of coupling (mm)	E	49		55		66		81		90		110		123		133		157		200	
Distance (mm)	F	13		16		18		19		19		23		25		31		30		34	
Distance (full disengagement) (mm)	F <sup>F</sup>	13		14		17		18		17		20		22		20		26		31	
6x ISO 4017	I	M4		M5		M5		M6		M6		M8		M8		M10		M12		M16	
Tightening torque (Nm)	I	4		6		8		12		14		18		25		40		70		120	
Approx. weight (kg)		0.3		0.4		1.2		2.3		3.0		5.0		6.5		9.0		16.3		35	
Moment of inertia (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>ges</sub>	0.10	0.15	0.28	0.30	0.75	0.80	1.90	2.00	2.80	3.00	5.50	6.00	11.0	12.8	20	42	257			
Torsional stiffness (10 <sup>3</sup> Nm/rad)	C <sub>T</sub>	20	15	39	28	76	55	175	110	191	140	420	350	510	500	780	1304	3400			
Lateral misalignment max. (mm)		0.15	0.20	0.20	0.25	0.20	0.25	0.20	0.25	0.25	0.30	0.25	0.30	0.30	0.35	0.35	0.35	0.35	0.35	0.35	0.35
Angular misalignment max. (degrees)		1	1.5	1	1.5	1	1.5	1	1.5	1.5	2	1.5	2	2	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lateral spring stiffness (N/mm)		475	137	900	270	1200	380	1550	435	2040	610	3750	1050	2500	840	2000	3600	6070			
Actuation path (mm)		1.5		1.5		1.7		1.9		2.2		2.2		2.2		2.2		3		3	


A<sup>F</sup>, B<sup>F</sup>, F<sup>F</sup> = Full disengagement version



single-position  
multi-position  
load holding  
full disengagement




# MODEL SK5



## BACKLASH FREE TORQUE LIMITER

press-fit version, with clamping hub

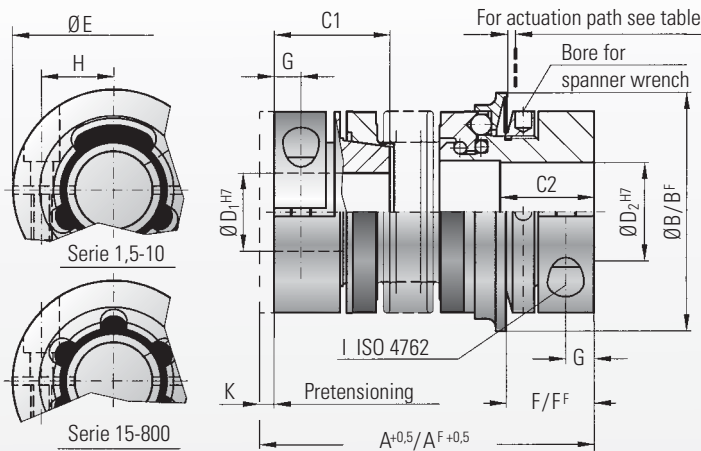

Optional sealed version for wash down and foodservice application. See page 16.

**Material:**

Bellows made of highly elastic stainless steel  
Torque limiter section: High strength hardened steel

**Clamping hubs:**

up to series 80 aluminium from series up 150 steel

**Design:**

With a single radial clamping screw per hub

**Temperature range:**

-30° C to +120° C

**Backlash:**

Absolutely backlash free as a result of the frictional clamp connection and the patented R+W principle

**Service life:**

These couplings are maintenance free and have extreme service life as long as the performance limits are not exceeded.

**Fit tolerance:**

Tolerance between hub and shaft 0.01-0.05 mm

**Ordering specifications:**


Page 11

Model SK 5		Series												
		1.5	2	4.5	10	15	30	60	80	150	300	500	800	
Adjustment range available from - to (approx. values) (Nm)	T <sub>KN</sub>	0.1-0.6 0.4-1 0.8-1.5	0.2-1.5 or 0.5-2	1-3 or 3-6	2-6 or 4-12	5-10 or 8-20	10-25 or 20-40	10-30 or 25-80	20-70 or 30-90	20-70 or 45-150	100-200 150-240 200-320	80-200 200-350 300-500	400-650 500-800 650-850	
Adjustment range available from - to (approx. values) (full disengagement) (Nm)	T <sub>KN</sub>	0.3-0.8 or 0.6-1.3	0.5-2	2.5-4.5	2-5 or 5-10	7-15	8-20 or 16-30	20-40 or 30-60	20-60 or 40-80	80-150	120-200 or 160-300	60-150 100-300 250-500	200-400 or 450-800	
Overall length +0,5 inserted (mm)	A	44	48 54	60 68	70 79	76 83	89 97	105 115	115 127	116 128	143 157	166 180	196	
Overall length +0,5 inserted (full disengagement) (mm)	A <sup>F</sup>	44	48 54	60 68	70 79	76 83	89 97	105 115	117 129	118 130	146 160	170 184	207	
Actuation ring Ø (mm)	B	23	29	35	45	55	65	73	92	92	120	135	152	
Actuation ring Ø (full disengagement) (mm)	B <sup>F</sup>	24	32	42	51.5	62	70	83	98	98	132	155	177	
Fit length C <sub>1</sub> /C <sub>2</sub> (mm)	C <sub>1</sub> /C <sub>2</sub>	14   11	16/13	19/16	21/16	28/22	33/27	39/31	43/35	43/35	52/42	61/52	74/48	
Inner diameter from Ø to Ø H7 (mm)	D <sub>1</sub>	3-8	4-12	5-16	5-20	8-22	10-25	12-32	14-38	14-38	30-56	35-60	40-62	
Outer diameter from Ø to Ø H7 (mm)	D <sub>2</sub>	3-8	4-12	5-14	5-20	8-26	10-30	12-32	14-42	14-42	30-60	35-60	40-75	
Outer diameter of coupling (mm)	E	19	25	32	40	49	55	66	81	81	110	123	134	
Distance (mm)	F	12	13	15	17	19	24	30	31	31	35	45	50	
Distance (full disengagement) (mm)	F <sup>F</sup>	11.5	12	14	16	19	22	29	31	30	36	43	54	
Distance (mm)	G	3.5	4	5	5	6.5	7.5	9.5	11	11	13	17	18	
Distance between centers (mm)	H	6	8	10	15	17	19	23	27	27	39	41	2x48	
ISO 4762 screws	I	M2.5	M3	M4	M4	M5	M6	M8	M10	M10	M12	M16	2xM16	
Tightening torque (Nm)	I	1	2	4	4.5	8	15	40	50	70	130	200	250	
Pretensioning, approx. (N)	K	0.1 to 0.5	0.2 to 0.7	0.2 to 0.7	0.2 to 1.0	0.2 to 1.0	0.5 to 1.0	0.5 to 1.0	0.5 to 1.0	0.5 to 1.0	0.5 to 1.5	0.5 to 2.0	0.5 to 2.0	
Axial recovery of coupling max. (N)		4	8 5	15 10	25 30	20 12	50 30	70 45	48 32	82 52	157 106	140 96	200	
Approx. weight (kg)		0.038	0.07	0.2	0.3	0.4	0.6	1.4	2	2.4	5.9	9.6	15	
Moment of inertia (10 <sup>-3</sup> kgm <sup>2</sup> )	J <sub>ges</sub>	0.01	0.01 0.01	0.02 0.02	0.06 0.07	0.10 0.15	0.27 0.32	0.75 0.80	1.80 1.90	2.50 2.80	6.50 7.00	13.0 17.0	50	
Torsional stiffness (10 <sup>3</sup> Nm/rad)	C <sub>T</sub>	0.7	1.2 1.3	7 5	8 7	12 10	18 16	40 31	68 45	90 60	220 190	260 250	390	
Lateral misalignment max. (mm)		0.15	0.15 0.20	0.20 0.25	0.20 0.30	0.15 0.20	0.20 0.25	0.20 0.25	0.20 0.25	0.20 0.25	0.25 0.30	0.30 0.35	0.35	
Angular misalignment max. (degrees)		1	1 1.5	1.5 2	1.5 2	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5	1.5 2	2 2.5	2.5	
Lateral spring stiffness (N/mm)		70	40 30	290 45	280 145	475 137	900 270	1200 420	920 290	1550 435	3750 1050	2500 840	2000	
Actuation path (mm)		0.7	0.8	0.8	1.2	1.5	1.5	1.7	1.9	1.9	2.2	2.2	2.2	


A<sup>F</sup>, B<sup>F</sup>, F<sup>F</sup> = Full disengagement version

optional  
stainless  
steel

single-position  
multi-position  
load holding  
full disengagement



press-fit version, with clamping hub

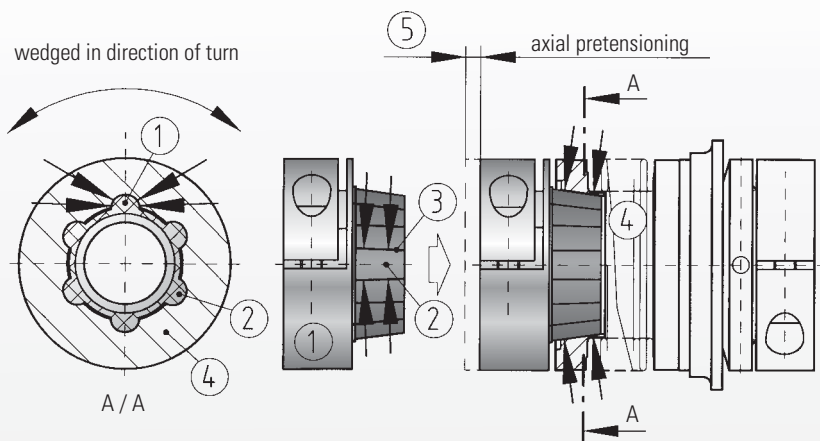

### Design details

Six self-centering, tapered drive projections (2) have been formed into the taper segment, which has been molded onto an aluminium hub (1).

The six projections are configured conically in a longitudinal direction (3). The mating-piece consists of a metal bellows with a tapered female element (4).


Absolutely backlash-free torque transmission is ensured due to the axial pretensioning (5) of the metal bellows during mounting. This slight pretensioning has no negative influence on the operation of the metal bellows or on the shaft bearing.

### Possible applications for backlash-free, press-fit torque limiter SK 5

1 Applications with limited accessibility. The dismantling of a single-piece coupling is too labor intensive.

2 The **press fit design** allows the motor or gearbox unit to be removed by simply pulling it out when servicing is required.

Dismounting the coupling is possible **without loosening** the hub fastening screws. Therefore, clamping screw access holes are not required.

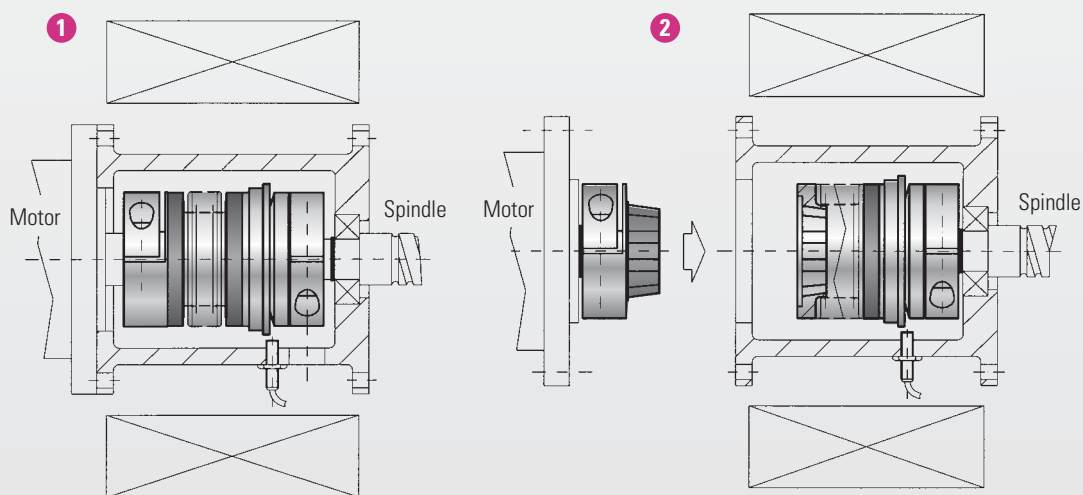

### Ordering specifications

SK2 / 60 / 102 / D / 16 / 19 / 25/10-30/XX

Required information for models SK 2, SK 3 and SK 5

- Model
- Series
- Overall length (mm)
- Version
- Bore Ø D1 H7
- Bore Ø D2 H7
- Disengagement torque (Nm)
- Adjustment range (Nm)
- e.g. stainless steel

### Possible versions:

- W = single position
- D = multi position
- G = Load holding
- F = Full disengagement

single-position  
multi-position  
load holding  
full disengagement




# ACCESSORIES

## BACKLASH-FREE TORQUE LIMITERS FROM R+W

### Torque adjusting wrench for DIN 1816 nuts

Order-No.: see table

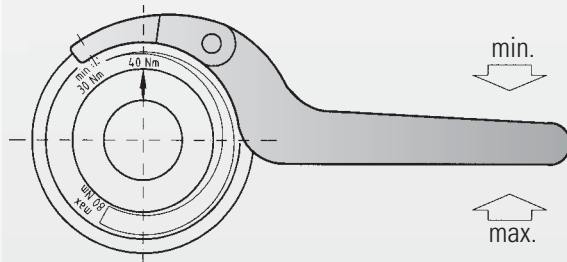


Small coupling sizes do not require a wrench. The adjusting nuts for series 1.5 / 2 / 4.5 / 10 can be adjusted with a bolt, or drift pin.

Coupling series			Wrench
15			Order-No. 60/4
30	60	80/150	Order-No. 90/5
200			Order-No. 90/6
300			Order-No. 155/6
500			Order-No. 155/8
800	1500	2500	Order-No. 230/8

### Mechanical switch for Emergency Cut-Off (appropriate from series 10 up)


Order-No.: 618.6740.425

Technical drawing

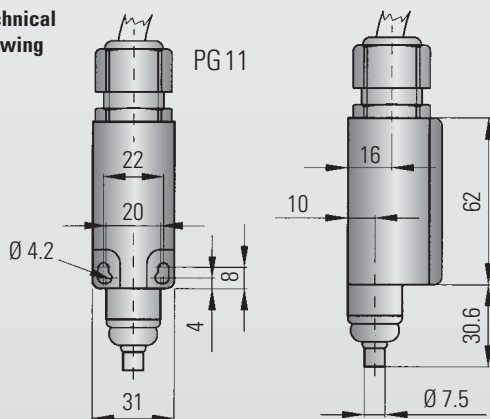

**Important:**

Upon assembly, it is absolutely necessary to test the function of the switch 100%.

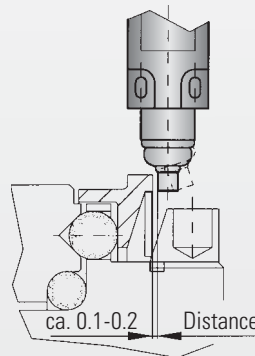


The actuation tappet should be put as close as possible to the actuation ring of the torque limiter (approx. 0.1-0.2)

Technical data

<b>Max. voltage:</b>	500 V AC
<b>Max. constant current:</b>	10 A
<b>Protective System:</b>	IP 65
<b>Contact system:</b>	Opener (forced separating)
<b>Ambient temperature:</b>	- 30° C - +80 °C
<b>Actuation:</b>	Tappet (metal)


Switch diagram:



### Proximity sensor for Emergency cut-off


Order-No.: 650.2703.001

Technical drawing

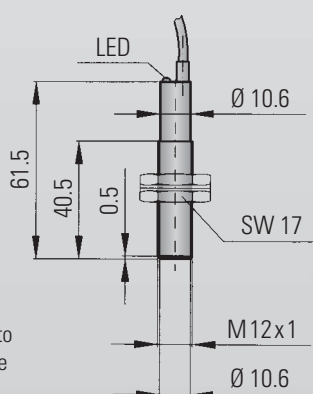

**Important:**


Upon assembly, it is absolutely necessary to test the function of the switch 100%.

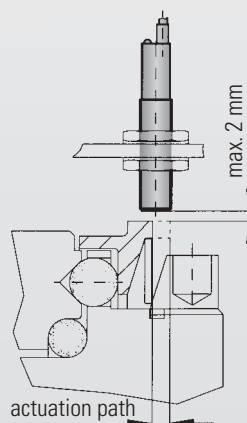

Technical data

<b>Voltage:</b>	10 bis 30 V DC
<b>Output current:</b>	200 mA
<b>Switch frequency:</b>	800 Hz
<b>Temperature range:</b>	-25°C bis +70°C
<b>Protective System:</b>	IP 67
<b>Switch Type:</b>	normally open
<b>Max. detection gap:</b>	max. 2 mm




Switch diagram:



# GENERAL FUNCTION


**R+W torque limiters are ball detent style overload couplings. They protect drive and driven mechanical components from damage associated with torque overloads.**

- Backlash free torque transmission is accomplished by a series of steel balls (4) nested in hardened detents (5).
- Disc springs push against an actuation ring (3) keeping the balls nested.
- The disengagement torque is adjustable by means of an adjustment nut (1).
- In the event of an overload, the actuation ring (3) moves axially allowing the balls to roll out of the detents separating the drive and driven elements.
- The movement of the actuation ring (3) can be sensed by means of a mechanical switch or proximity sensor (6) triggering the drive to shut down.

max. misalignment SK 2 - SK 5	
<p><b>Angular misalignment <math>\Delta K_w</math></b></p> 	<p><b>CAUTION:</b> Exact alignment of the R+W Torque Limiter considerably increases the service life of the metal bellow.</p>
<p><b>Axial misalignment <math>\Delta K_a</math></b></p> 	<p>Reducing or eliminating lateral misalignment eliminates the radial loading of the adjacent bearings, increasing service life and reducing heat.</p>
<p><b>Lateral misalignment <math>\Delta K_r</math></b></p> 	<p>For drives running at high speed it is recommended to align the coupling with a dial indicator.</p> <p>Max. misalignment values see table. Axial misalignment between 1-2 mm.</p>

## Single-position / Multi-position

In a torque overload, for the single-position design (standard) and multi-position design, the spring disengages to allow the balls to come out of their detents separating the drive and driven elements. Very low residual spring pressure remains so that the coupling will re-engage once the torque is reduced below the overload setting.

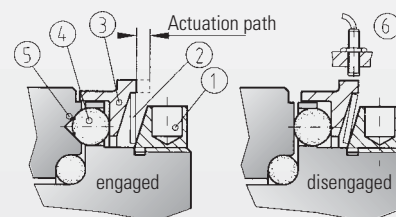


In the load holding version the drive and driven elements are only allowed limited rotation in order to allow for movement of the actuation ring.

**Re-engagement is only possible at low speed.**


## Full-disengage

With this design, when a torque overload is detected, the disc spring completely flips over and places no residual spring pressure on the actuation ring. The drive and driven elements are completely separated.

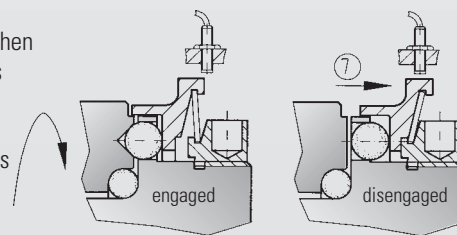


**Re-engagement of the coupling is not automatic and must be performed manually (Picture 3a, 3b).**

**CAUTION:**  
Re-engagement should only be performed when the coupling is still and not rotating!



Picture 3a



Picture 3b

The R+W full-disengage torque limiting coupling can be re-engaged in six different positions or every 60 degrees with low „press-in“ force (E). Marks on the actuation ring and body (13) of the coupling must line up and indicate the re-engagement points.

In size 60 and up the re-engagement can be done with 2 lever which will be supported at a recess on the adjustment nut (picture 3b). Screwdrivers can be used as a lever.

single-position  
multi-position  
load holding  
full disengagement



# MOUNTING-INSTRUCTIONS

## BACKLASH-FREE TORQUE LIMITERS FROM R+W

- All torque limiters are supplied to ISO bore tolerance grade H7. The fit tolerance of the hub/shaft connection must be between 0.01 and 0.05 mm.
- Ensure that the coupling mounts smoothly onto the shaft prior to final installation.
- Lightly oil the shaft prior to installation. Do not use sliding grease, or oils and grease with molybdenum disulfide or other high-pressure additives. Any keyways in the shaft will not affect the functioning of the clamped connection.

### Model SK1/SKP

Model SK1 has an integrated bearing a for support of the attached component (for example a pulley or sprocket).


Do not exceed the maximum radial force  $F_2$  (see table)

By centering the load between the dimension  $S$ , additional separate bearing support is not required.

For offset mounting, additional bearings are required.



This is recommended, for example, if the attached component has a very small diameter or the drive element has a high thickness.

Depending on the installation situation, ball bearings, needle bearings or bushings may be used.

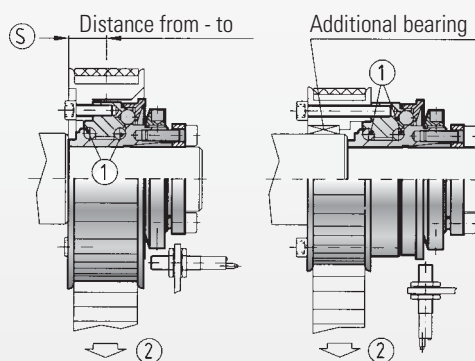

Series	1.5	2	4.5	10	15	30	60	150	200	300	500	800	1500	2500
<b>Radial load capacity, max (N)</b>	50	100	200	500	1400	1800	2300	3000	3500	4500	5600	8000	12000	20000
<b>(S) from-to</b>	3-6	5-8	6-11	6-14	7-17	10-24	10-24	12-24	12-26	12-28	16-38	16-42	20-50	28-60

### Disengagement torque setting

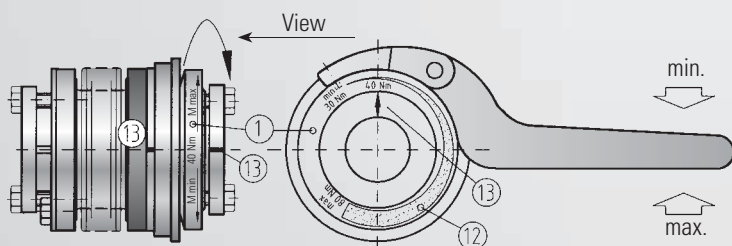

- ① adjustment nut
- ①① fastening screw
- ③ steel actuation ring
- ①② adjustment range
- ①③ marking

R+W torque limiters are factory set to the customer specified disengagement torque, which is marked onto the coupling. The adjustment range (min/max) is also marked on the adjustment nut (1). The customer can adjust the disengagement torque as long as it falls into the range (12) indicated on the adjustment nut.

The adjustment range may not be left during setting.


To adjust the disengagement torque, loosen the locking screws (11) and rotate the adjustment ring using a spanner wrench to the desired new setting. Tighten the 3 locking screws (11) and test the coupling.

**CAUTION:**

R+W torque limiters incorporate disc springs that exhibit a special spring characteristic. It is important to stay in the max-min range of the coupling.

## MOUNTING AND DISMOUNTING: SK MODELS

### SKP with key way




#### Mounting:

Slide the coupling onto the shaft. Lock it in position, with an endplate (8) for example.

#### Dismounting:

Remove the end plate and slide the coupling off the shaft using an appropriate tool.

### SK 1 with clamping hub Series 1.5 - 10




#### Mounting:

Slide the coupling onto the shaft to the proper axial position. Using a torque wrench tighten the clamp screw to the proper tightening torque as indicated. (see page 7)

#### Dismounting:

Simply loosen the clamp screw and remove the coupling.

### SK 1 with tapered bushing



#### Mounting:


Slide the coupling onto the shaft to the proper axial position. Using a torque wrench, uniformly tighten the clamping screws using a cross-wise tightening pattern. Apply 1/3, 2/3 and full torque until all the clamping screws are evenly tightened to the correct tightening torque as given on page 6.

**CAUTION:** Further tightening of the clamping screws will damage the tapered bushing connection. While tightening the coupling may move slightly towards the tapered bushing.

#### Dismounting:

Loosen the clamping screws. Insert the three jack screws into the taped holes on the tapered segment apply even pressure to remove the tapered segment. Remove the coupling.

### SK 2 with clamping hub




#### Mounting:

Prior to mounting make sure that the shafts to be connected does not exceed the angular or lateral misalignment limits for the coupling. This data can be found in the catalog. Slide the coupling on the first shaft end to the proper axial position. Using a torque wrench, tighten the clamp screw to the correct tightening torque as indicated (page 8). Insert the second shaft into the other end of the coupling to the proper axial position. Make sure that the coupling is free of any axial forces before tightening. Tighten the clamp screw as above using a torque wrench.

#### Dismounting:

Simply loosen the clamp screw and remove the coupling.

### SK 3 with tapered bushing



#### Mounting:


Prior to mounting make sure that the shafts to be connected does not exceed the angular or lateral misalignment limits for the coupling size to be used. This data can be found in the catalog. Slide the coupling onto the first shaft to the proper axial position. Using a torque wrench, uniformly tighten the clamping screws using a cross-wise tightening pattern. Apply 1/3, 2/3 and full torque until all the clamping screws are evenly tightened to the correct tightening torque (see page 9).

**CAUTION:** Mounting is completed. Further tightening of the clamp screws may damage the tapered bushing connection.

#### Dismounting:

Loosen the clamping screws. Use the three jack screws 9 conveniently mounted in the taper segment and 10 on the bellow body to evenly back out the tapered segment. Remove the coupling.

### SK 5 with press-fit tapered clamping hubs



#### Mounting:

Prior to mounting it is necessary to consider the overall length of the assembled coupling. The press-fit coupling requires a specific pre-tensioning (K) between the two coupling halves to ensure backlash free operation. Mount the „female“ coupling half containing the bellow onto the first shaft end to the proper axial position. Using a torque wrench tighten the clamp screw to the proper tightening torque. Mount the „male“ coupling segment onto the second shaft end. The proper axial position is when the two couplings come together and coupling is compressed by the proper pre-tension distance (K). See page 10. When the coupling segment is properly positioned tighten the clamp screw to the proper torque.

#### Dismounting:

Pull the coupling apart. Simply loosen the clamp screws and remove the coupling from the shaft.




# ADDITIONAL INFORMATION

## BACKLASH-FREE TORQUE LIMITERS FROM R+W


### Behaviour and characteristic

#### Disengagement behavior

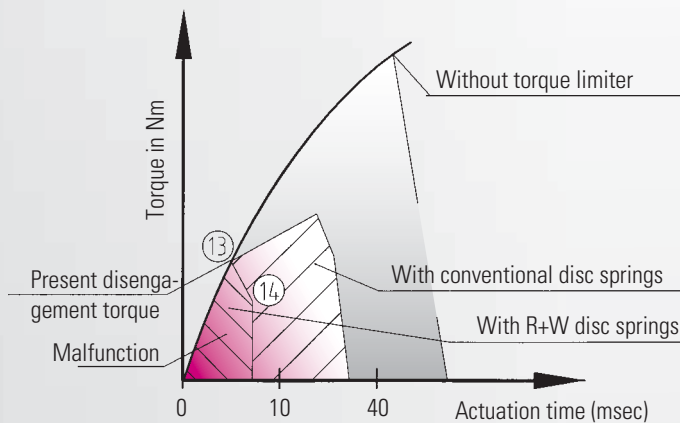

#### Spring characteristic

Degrassive spring characteristic

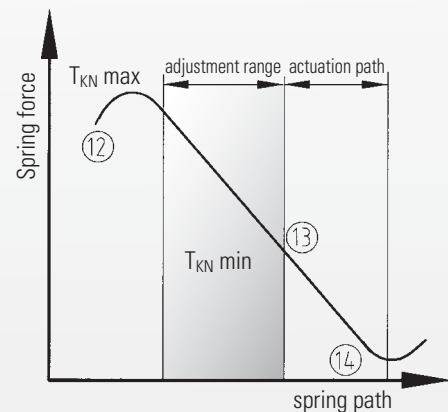

#### Spring package:

R + W torque limiters function by means of a disc spring with a digressive characteristic developed exclusively for this application. Upon the couplings actuation, this characteristic (13) brings about an immediate drop in the torque (14) and an interruption of the force flux.

The spring force of the disc spring drops to a lower value after the disengagement process.

This advantage guarantees extremely short actuation times (1-3 ms), low wear and very low residual friction (between 2-5 %).

#### Speed:

The service life of the coupling is essentially determined by the number of rotations after disengagement.

#### Wear:

No wear occurs during engaged operating condition. In the event of an overload the drive should be stopped through a mechanical limit switch or proximity switch immediately.

#### Maintenance:


When properly engaged, the torque limiters are wear free, and therefore require no maintenance. The ball detent mechanism within each coupling is permanently lubricated.

#### Seal:

Sealing of the torque limiters is available:

#### Advantages of the sealing:

- Protection from dirt and liquid contamination
- Appropriate for food service and light washdown environments
- No escape of grease possible

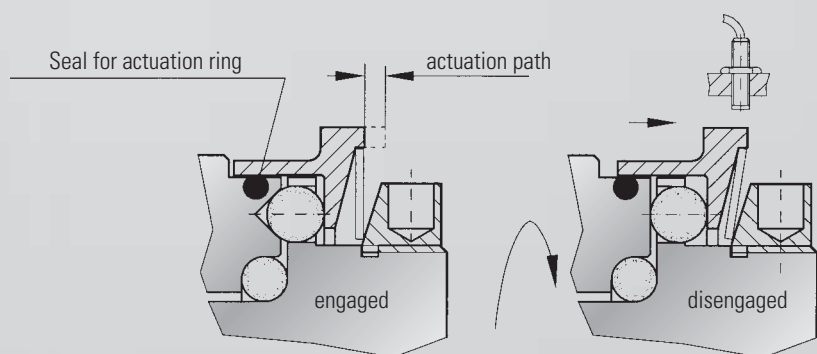

Prior technical approval is suggested, for applications using our products other than specified.



# SELECTION

## According to disengagement torque

As a rule torque limiters are rated according to the required disengagement torque, which must be greater than the torque that is necessary for regular machine operation.

The disengagement torque of the torque limiters is determined as a rule in accordance with the drive specifications.

The following calculation has proven itself as a good rule of thumb:

$$T_{KN} \geq 1.5 \cdot T_{AS} \text{ (Nm)}$$

or

$$T_{KN} \geq 9550 \cdot \frac{P_{AN}}{n} \cdot 1.5 \text{ (Nm)}$$

$T_{KN}$  = rated torque of coupling (Nm)

$T_{AS}$  = peak torque of motor (Nm)

$T_{KN}$  = rated torque of coupling (Nm)

$P_{AN}$  = drive power (kw)

$n$  = speed of drive (rpm)

## According to acceleration torque (start-up at no load)

**$S_A$  = shock or load factor**

$S_A = 1$  (uniform load)

$S_A = 2$  (non-uniform load)

$S_A = 3$  (high dynamic load)

$$T_{KN} \geq \alpha \cdot J_L \geq \frac{J_L}{J_A + J_L} \cdot T_{AS} \cdot S_A \text{ (Nm)}$$

Values for  $S_A = 2-3$  are usual for servo drives on machine-tools

$T_{KN}$  = rated torque of coupling (Nm)

$\alpha$  = angular acceleration  $\frac{1}{s^2}$

$$\alpha = \frac{\omega}{t} = \frac{\pi \cdot n}{t \cdot 30}$$

$t$  = acceleration time (s)

$\omega$  = angular speed in (s<sup>-1</sup>)

$n$  = speed of drive (rpm)

$J_L$  = moment of inertia on load side (kgm<sup>2</sup>)

$J_A$  = moment of inertia on driving side (kgm<sup>2</sup>)

$T_{AS}$  = peak torque of motor (Nm)

## According to acceleration and load torque (start with load)

$$T_{KN} \geq \alpha \cdot J_L + T_{AN} \geq \left[ \frac{J_L}{J_A + J_L} \cdot (T_{AS} - T_{AN}) + T_{AN} \right] \cdot S_A \text{ (Nm)}$$

**$S_A$  = shock or load factor**

$S_A = 1$  (uniform load)

$S_A = 2$  (non-uniform load)

$S_A = 3$  (high dynamic load)

Values for  $S_A = 2-3$  are usual for servo drives on machine-tools

$T_{KN}$  = rated torque of coupling (Nm)

$\alpha$  = angular acceleration  $\frac{1}{s^2}$

$$\alpha = \frac{\omega}{t} = \frac{\pi \cdot n}{t \cdot 30}$$

$t$  = acceleration time (s)

$\omega$  = angular speed in (s<sup>-1</sup>)

$n$  = speed of drive (rpm)

$J_L$  = moment of inertia on load side (kgm<sup>2</sup>)

$T_{AN}$  = load torque (Nm)

$J_A$  = moment of inertia on driving side (kgm<sup>2</sup>)

$T_{AS}$  = peak torque of motor (Nm)

single-position  
multi-position  
load holding  
full disengagement

optional  
stainless  
steel

# SELECTION

## BACKLASH-FREE TORQUE LIMITERS FROM R+W

### According to feed force

Spindle drive

$$T_{AN} = \frac{s \cdot F_V}{2000 \cdot \pi \cdot \eta} \quad (\text{Nm})$$

$T_{AN}$	=	load torque	(Nm)
$S$	=	spindle pitch	(mm)
$F_V$	=	feed force	(N)
$\eta$	=	spindle efficiency	

Timing belt drive

$$T_{AN} = \frac{d_0 \cdot F_V}{2000} \quad (\text{Nm})$$

$T_{AN}$	=	load torque	(Nm)
$d_0$	=	pinion dia. (pulley)	(mm)
$F_V$	=	feed force	(N)

### According to resonant frequency (SK 2 / 3 / 5 with bellows attachment)

Usually high resonant frequencies of the couplings are required in order to make high acceleration values possible and to avoid excessive vibration.

For the purpose of calculation the drive is reduced to a 2 mass system.

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \times \frac{J_{Masch} + J_{Mot}}{J_{Masch} \cdot J_{Mot}}} \quad (\text{Hz})$$

$C_T$	=	torsional stiffness of the coupling	(Nm/rad)
$J_{Masch.}$	=	moment of inertia of machine (spindle + slide + workpiece + half of coupling)	(kgm <sup>2</sup> )
$J_{Mot.}$	=	moment of inertia of motor (motor's rotor + half of coupling)	(kgm <sup>2</sup> )
$f_e$	=	Resonant frequency of a two mass system	(Hz)

### According to torsional stiffness (SK 2 / 3 / 5 with bellows attachment)

Transmission errors due to a torsional stress on the metal bellows:

$$\varphi = \frac{180}{\pi} \cdot \frac{T_{AS}}{C_T} \quad (\text{Degrees})$$

$\varphi$	=	angle of turn	(degrees)
$C_T$	=	torsional stiffness of coupling	(Nm/rad)
$T_{AS}$	=	peak torque of motor	(Nm)

### According to the function system

**Load holding version:** On SK1 / SKP models the load holding version has a double load safety margin. Ensure that models with bellows (SK2, 3 and 5) are of adequate size. The overload torque in this case should not exceed the nominal torque rating of the coupling.

# R+W: QUALITY AND KNOW-HOW

## Quality and know-how for couplings in servo, NC and stepper motor systems.

The demands on drive technology have dramatically and steadily increased in the last few years. Our company **R+W** is proud to have reached a leading market position within the same few short years and we continue to work hard in the areas of design and technical development to stay there. **R+W** has representatives in more than 40 countries all over the world and is opening more branches every year.

Our range of high-quality precision couplings meet the needs of the most demanding applications. But for our technical staff this is not enough. We are constantly developing, new solutions, new designs, new possibilities.

We want you to contact us, to give us the opportunity to create a solution and to earn your business. Each person on the **R+W** staff knows that quality comes from his or her personal engagement with, and listening to, the customer.

## Benefit from our quality and efficiency.

We are ISO 9001 certified. Our production and customer service department have been organized to maximize efficiency and minimize delivery time.

Extensive quantities of component inventory are kept on hand to ensure the quickest possible delivery, often within one day. Special designs are a major part of our business and are immediately processed, designed and built. **R+W** also has developed proprietary software to calculate resonant frequencies and other performance limits.

**R+W continues to reinvest to ensure that our couplings remain innovative to improve their efficiency and operating dependability with your applications.**



### Special low cost rust protection process

Corrosion protection which is equivalent to that of galvanized or chrome-plated surfaces is available.

The positive features of this include good resistance to wear and corrosion.

The parts are resistant to a salt spray test pursuant to DIN 50021 for a period of 140 hours.

This process represents a genuine, low cost alternative to expensive stainless steel materials.

Couplings with this surface treatment have been used for many years by well-known companies in the food industry.



### Versions in explosion-proof design

All models can be supplied in an explosion-proof design to order without any change in dimensions.



### DXF + 3D files

The complete product range can be supplied on CD-ROM in DXF and DWG files. This allows the files to be imported into design programs easily. 3 dimensional drawings of the couplings are also available.



### Download

All the drawings can be downloaded directly from our homepage [www.rwcouplings.com](http://www.rwcouplings.com).



### DIN ISO 9001

Quality awareness is a high priority at R+W.

The introduction of DIN ISO 9001 has meant the refinement of quality procedures and the appropriate documentation.

In a one-year preparation period, the ISO 9001 quality system was produced and certified on 4 March 1997.

Constant monitoring and improvement of the system ensures a technically superior product with a quality standard second to none.



**Experience and  
Know-how  
for your special  
requirements.**

R+W Antriebselemente GmbH  
Alexander-Wiegand-Straße 8  
D-63911 Klingenberg/Germany

Tel. +49-(0)9372 – 9864-0  
Fax +49-(0)9372 – 9864-20

info@rw-kupplungen.de  
www.rwcouplings.com



TGA-ZM-05-91-00  
Registration No. 9605022

The information mentioned in this document is based on our present knowledge and experiences and does not exclude the manufacturer's own substantial testing of the equipment. So this is no obligatory assurance even with regard to protection rights of Third Parties. The sale of our products is subject to our General Conditions of Sale and Delivery.

## THE R+W-PRODUCT RANGE



### **TORQUE LIMITERS Series SK**

From 0.1 – 2,800 Nm, Bore diameters 4 – 70 mm  
Available as a single position, multi-position, load holding, or full disengagement version  
Single piece or press-fit design



### **BELLOWS COUPLINGS Series BK**

From 15 – 10,000 Nm  
Bore diameters 10 – 180 mm  
Single piece or press-fit design



### **BELLOWS COUPLINGS ECONOMY CLASS Series BKL / BKC**

From 2 – 500 Nm  
Bore diameters 4 – 75 mm



### **LINE SHAFTS Series ZA/ZE**

From 10 – 4,000 Nm  
Bore diameters 10 – 100 mm  
Available up to 6 mtr. length



### **MINIATURE BELLOWS COUPLINGS Series MK**

From 0.05 – 10 Nm  
Bore diameters 1 – 28 mm  
Single piece or press-fit design



### **SERVOMAX<sup>®</sup> ELASTOMER COUPLINGS Series EK**

From 5 – 2,000 Nm, Shaft diameters 5 – 80 mm  
backlash-free, press-fit design



### **LINEAR COUPLINGS Series LK**

From 70 – 2,000 N  
Thread M5 – M16



### **POLYAMID COUPLINGS MICROFLEX Series FK 1**

Rated torque 1 Ncm  
Bore diameters 1 – 1.5 mm